

## SMD Varistors

### MLV; Automotive Series



#### Construction

- Multilayer technology
- Termination: nickel barrier (CT series) or silver palladium (CN series)
- No plastic or epoxy encapsulation assures better than UL 94 V-0 flammability rating

#### Features


- Sizes 0603 ... 2220
- High energy absorption, particularly in case of load dump
- Stable protection level, low leakage current
- High resistance to cyclic temperature stress
- Wide range of operating temperature
- Low inductance (suitable for ESD protection)
- PSpice models
- Bidirectional clamping

#### Taping

- Supply on 8/12-mm tape, for tape dimensions see pages 154/155, for reel dimensions and packing units see page 157, chapter "SMD Varistors: Taping"

#### Type designation

Detailed description of coding system on page 39, chapter "General Technical Information"

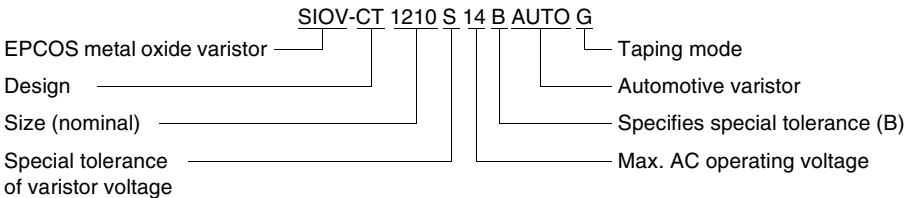

#### General technical data

Climatic category	55/125/56	in accordance with IEC 60068-1
LCT	– 55 °C	
UCT	+ 125 °C	
Damp heat, steady state (93 % r.h., 40 °C)	56 days	in accordance with IEC 60068-2-3
Operating temperature	– 55 ... + 125 °C	in accordance with CECC 42 000
Storage temperature <sup>1)</sup>	– 55 ... + 150 °C	
Response time	< 0,5 ns	
Solderability	235 °C, 2 s	in accordance with IEC 60068-2-58
Resistance to soldering heat	260 °C, 10 s	in accordance with IEC 60068-2-58

1) For mounted parts (storage conditions for unused parts on reel see page 38, chapter "General Technical Information")


**SMD Varistors**
**Automotive – Nickel Barrier Termination (available upon request)**
**Maximum ratings ( $T_A = 125\text{ °C}$ )**

Type	Ordering code	$V_{RMS}$ V	$V_{DC}$ V	$i_{max}$ 8/20 $\mu$ s A	$W_{max}$ (2 ms) J	$P_{max}$ W	$W_{LD}$ (10x) J
12-V supply systems							
CT0603S14BAUTOG	B72500T1140S260	14	16	30	0,2	0,003	—
CT0805S14BAUTOG	B72510T1140S262	14	16	120	0,3	0,008	1,0
CT1206S14BAUTOG	B72520T1140S262	14	16	200	0,6	0,008	1,5
CT1210S14BAUTOG	B72530T1140S262	14	16	400	1,6	0,010	3,0
CT1812S14BAUTOG	B72580T1140S262	14	16	800	2,4	0,015	6,0
CT2220S14BAUTOG	B72540T1140S262	14	16	1200	5,8	0,030	12,0
CT2220S14BAUTOE2G2	B72540T3140S272	14	16	1200	5,8	0,030	25,0
24-V supply systems							
CT2220K25AUTOE2G2	B72540T3250K072	25	31	1200	9,6	0,030	25,0
CT2220K30AUTOG	B72540T1300K062	30	34	1200	12,0	0,030	12,0
CT2220K30AUTOE2G2	B72540T3300K072	30	34	1200	12,0	0,030	25,0

**Characteristics ( $T_A = 25\text{ °C}$ )**

Type	$V_{Jump}$ (5 min) V	$V_V$ (1 mA) V	$\Delta V_V$ (1 mA) %	Max. clamping voltage		$C_{typ}$ (1 kHz) nF	$L_{typ}$ nH	Der. curve Page	V/I char. Page
				$v$ V	$i$ A				
12-V supply systems									
CT0603S14BAUTOG	24,5	22	+23/-0	42	1,0	0,12	1,0	238	272
CT0805S14BAUTOG	24,5	22	+23/-0	42	1,0	0,4	1,5	239	272
CT1206S14BAUTOG	24,5	22	+23/-0	40	1,0	0,8	1,8	240	272
CT1210S14BAUTOG	24,5	22	+23/-0	40	2,5	1,7	1,8	242	272
CT1812S14BAUTOG	24,5	22	+23/-0	40	5,0	5,6	2,5	244	272
CT2220S14BAUTOG	24,5	22	+23/-0	40	10,0	9,5	3,0	245	272
CT2220S14BAUTOE2G2	24,5	22	+23/-0	40	10,0	15,0	3,0	245	272
24-V supply systems									
CT2220K25AUTOE2G2	40,0	39	$\pm 10$	65	10,0	10,0	3,0	245	271
CT2220K30AUTOG	45,0	47	$\pm 10$	77	10,0	4,0	3,0	245	271
CT2220K30AUTOE2G2	45,0	47	$\pm 10$	77	10,0	10,0	3,0	245	271

**Notes**

- If the maximum loads specified for load dump and jump start are fully utilized, subsequent polarity reversal of the AUTO varistors is inadmissible.
- If the load remains under the maximum ratings, polarity reversal may be admissible. Contact EPCOS for consultancy on this kind of problem.
- Load dump or jump start can decrease the varistor voltage in load direction by max. 15 %.
- Load dump: min. time of energy input 40 ms, interval 60 s.  
(The load dump time constant  $t_d$  differs from the time constant of the energy input)


**Maximum ratings ( $T_A = 125\text{ °C}$ )**


Type	Ordering code	$V_{RMS}$	$V_{DC}$	$i_{max}$ 8/20 $\mu$ s	$W_{max}$ (2 ms)	$P_{max}$	$W_{LD}$ (10x)
		V	V	A	J	W	J
<b>12-V supply systems</b>							
CN0603S14BAUTOG	B72500V1140S260	14	16	30	0,2	0,003	—
CN0805S14BAUTOG	B72510V1140S262	14	16	120	0,3	0,008	1,0
CN1206S14BAUTOG	B72520V1140S262	14	16	200	0,6	0,008	1,5
CN1210S14BAUTOG	B72530V1140S262	14	16	400	1,6	0,010	3,0
CN1812S14BAUTOG	B72580V1140S262	14	16	800	2,4	0,015	6,0
CN2220S14BAUTOG	B72540V1140S262	14	16	1200	5,8	0,030	12,0
CN2220S14BAUTOE2G2	B72540V3140S272	14	16	1200	5,8	0,030	25,0
<b>24-V supply systems</b>							
CN2220K25AUTOE2G2	B72540V3250K072	25	31	1200	9,6	0,030	25,0
CN2220K30AUTOG	B72540V1300K062	30	34	1200	12,0	0,030	12,0
CN2220K30AUTOE2G2	B72540V3300K072	30	34	1200	12,0	0,030	25,0

**Characteristics ( $T_A = 25\text{ °C}$ )**

Type	$V_{Jump}$ (5 min)	$V_V$ (1 mA)	$\Delta V_V$ (1 mA)	Max. clamping voltage		$C_{typ}$ (1 kHz)	$L_{typ}$	Der. curve	V/I char.
				$v$	$i$				
	V	V	%	V	A	nF	nH	Page	Page
<b>12-V supply systems</b>									
CN0603S14BAUTOG	24,5	22	+23/-0	42	1,0	0,12	1,0	238	272
CN0805S14BAUTOG	24,5	22	+23/-0	42	1,0	0,4	1,5	239	272
CN1206S14BAUTOG	24,5	22	+23/-0	40	1,0	0,8	1,8	240	272
CN1210S14BAUTOG	24,5	22	+23/-0	40	2,5	1,7	1,8	242	272
CN1812S14BAUTOG	24,5	22	+23/-0	40	5,0	5,6	2,5	244	272
CN2220S14BAUTOG	24,5	22	+23/-0	40	10,0	9,5	3,0	245	272
CN2220S14BAUTOE2G2	24,5	22	+23/-0	40	10,0	15,0	3,0	245	272
<b>24-V supply systems</b>									
CN2220K25AUTOE2G2	40,0	39	$\pm 10$	65	10,0	10,0	3,0	245	271
CN2220K30AUTOG	45,0	47	$\pm 10$	77	10,0	4,0	3,0	245	271
CN2220K30AUTOE2G2	45,0	47	$\pm 10$	77	10,0	10,0	3,0	245	271

**Notes**

- If the maximum loads specified for load dump and jump start are fully utilized, subsequent polarity reversal of the AUTO varistors is inadmissible.
- If the load remains under the maximum ratings, polarity reversal may be admissible. Contact EPCOS for consultancy on this kind of problem.
- Load dump or jump start can decrease the varistor voltage in load direction by max. 15 %.
- Load dump: min. time of energy input 40 ms, interval 60 s.  
(The load dump time constant  $t_d$  differs from the time constant of the energy input)


**SMD Varistors**
**MLV; Automotive Series**


Weight: &lt; 0,2 g


VAR0406-M

Termination acc. CECC 32101-801

**Dimensions**

Type	<i>l</i> mm	<i>b</i> mm	<i>h</i> mm	<i>k</i> mm
SIOV-CT/CN0603	1,6 ± 0,15	0,80 ± 0,10	0,9 max.	0,1 ... 0,4
SIOV-CT/CN0805	2,0 ± 0,20	1,25 ± 0,15	1,4 max.	0,13 ... 0,75
SIOV-CT/CN1206	3,2 ± 0,30	1,60 ± 0,20	1,7 max.	0,25 ... 0,75
SIOV-CT/CN1210	3,2 ± 0,30	2,50 ± 0,25	1,7 max.	0,25 ... 0,75
SIOV-CT/CN1812	4,5 ± 0,40	3,20 ± 0,30	2,5 max.	0,25 ... 1,0
SIOV-CT/CN2220	5,7 ± 0,40	5,00 ± 0,40	2,5 max.	0,25 ... 1,0

Termination: nickel barrier (CT) or silver palladium (CN)



VAR0391-D

**Recommended solder pad layout**

Type	<i>A</i> mm	<i>B</i> mm	<i>C</i> mm	<i>D</i> mm
SIOV-CT/CN0603	1,0	1,0	1,0	3,0
SIOV-CT/CN0805	1,4	1,2	1,0	3,4
SIOV-CT/CN1206	1,8	1,2	2,1	4,5
SIOV-CT/CN1210	2,8	1,2	2,1	4,5
SIOV-CT/CN1812	3,6	1,5	3,0	6,0
SIOV-CT/CN2220	5,5	1,5	4,2	7,2

**Herausgegeben von EPCOS AG**

**Unternehmenskommunikation, Postfach 80 17 09, 81617 München, DEUTSCHLAND**

**☎ ++49 89 636 09, FAX (0 89) 636-2 26 89**

© EPCOS AG 2002. Vervielfältigung, Veröffentlichung, Verbreitung und Verwertung dieser Broschüre und ihres Inhalts ohne ausdrückliche Genehmigung der EPCOS AG nicht gestattet.

Bestellungen unterliegen den vom ZVEI empfohlenen Allgemeinen Lieferbedingungen für Erzeugnisse und Leistungen der Elektroindustrie, soweit nichts anderes vereinbart wird.

Diese Broschüre ersetzt die vorige Ausgabe.

Fragen über Technik, Preise und Liefermöglichkeiten richten Sie bitte an den Ihnen nächstgelegenen Vertrieb der EPCOS AG oder an unsere Vertriebsgesellschaften im Ausland. Bauelemente können aufgrund technischer Erfordernisse Gefahrstoffe enthalten. Auskünfte darüber bitten wir unter Angabe des betreffenden Typs ebenfalls über die zuständige Vertriebsgesellschaft einzuholen.

**Published by EPCOS AG**

**Corporate Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY**

**☎ ++49 89 636 09, FAX (0 89) 636-2 26 89**

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.