


SEMI-PRECISION POWER WIREWOUND

AS SERIES

- 1/2 watt to 10 watts
- $\pm 5\%$, $\pm 3\%$, $\pm 1\%$, $\pm .5\%$ tolerance
- 0.1 ohm to 175K ohms
- Resistance wire TCR ± 20 ppm/ $^{\circ}\text{C}$
- AS-SM for surface mount capabilities. See Surface Mount section of this catalog for details.

Manufactured in Barbados

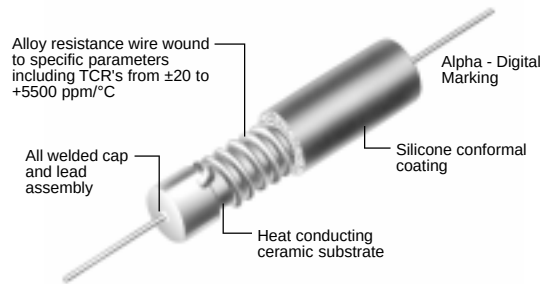


SPECIFICATIONS:

IRC Type	Equivalent MIL-R-26 Style	Power Rating 275°C Max. Hot Spot (watts)		Commercial Range (ohms)		Non-Inductive Range (ohms)		Available Resistance (ohms)	
		125°C	25°C	Min.	Max.	Min.	Max.	0.5%, 1%	3%, 5%
LAS-1		1	2	0.1	7.5K	0.1	3.8K	1-7.5K	0.1-6K
LAS-3		2	3	0.1	18K	0.2	7.5K	1-18K	0.1-18K
AS-1/4	RW81	0.5	1	0.1	1.0K	*	*	1-1K	0.1-1K
AS-1/2		0.5	1	0.1	6.0K	*	*	1-6K	0.1-6K
AS-1	RW70U	1	2	0.1	7.5K	0.1	3.8K	1-7.5K	0.1-7.5K
AS-1C		1	2	.05	2K	*	*	1-2K	.05-2K
AS-2	RW-69V/ RW79U	2	3	0.1	20K	0.5	10K	1-20K	0.1-20K
AS-2B		3	4	0.1	24K	0.5	12K	1-24K	0.1-24K
AS-2C		2	3	0.1	18K	0.2	7.5K	1-18K	0.1-18K
AS-3		3	5	0.1	30K	0.5	15K	1-30K	0.1-30K
AS-5	RW74U/ RW67V	5	7	0.1	60K	0.8	30K	1-60K	0.1-60K
AS-7		7	9	0.1	90K	1.0	45K	1-90K	0.1-90K
AS-10	RW68V/ RW78U	10	14	0.1	175K	3.0	50K	1-175K	0.1-175K

Inductance of AS-1/2 is less than $1\mu\text{H}$ at 1MHz.
To order non-inductive types, add the prefix "N". Example: NAS-1, NAS-2C, etc.

* Typical inductance of AS-1C <5 ohms is < $1\mu\text{H}$.
Lower values available upon request.

AS DIMENSIONS (Inches and (mm)):

					NOTE: Coating and marking is resistant to normal freon degreasing. Consult factory for special requirements.
IRC Type	A ± 0.032	B (max)	C (max)	D (Lead Diameter)	
LAS-1	0.348 (8.84)	0.110 (2.80)	0.407 (10.34)	0.020 (0.53)	
LAS-3	0.491 (12.47)	0.149 (3.80)	0.550 (13.99)	0.032 (0.81)	
AS-1/4	0.250 (6.4)	0.094 (2.4)	0.312 (7.9)	0.020 (0.5)	
AS-1/2	0.312 (7.9)	0.094 (2.4)	0.375 (9.5)	0.020 (0.5)	
AS-1	0.367 (9.3)	0.125 (3.2)	0.429 (10.9)	0.020 (0.5) 0.025 (0.64)	
AS-1C	0.256 (6.5)	0.115 (2.9)	0.303 (7.7)	0.025 (0.64) 0.032 (0.8)	
AS-2	0.480 (12.2)	0.250 (6.3)	0.600 (15.2)	0.032 (0.8)	
AS-2B	0.540 (13.7)	0.219 (5.6)	0.663 (16.6)	0.032 (0.8)	
AS-2C	0.489 (11.0)	0.157 (4.0)	0.594 (15.1)	0.032 (0.8)	
AS-3	0.687 (17.5)	0.282 (7.2)	0.812 (20.6)	0.040 (1.0)	
AS-5	0.875 (22.2)	0.344 (8.8)	0.980 (24.9)	0.040 (1.0)	
AS-7	1.250 (31.8)	0.344 (8.8)	1.375 (35.0)	0.040 (1.0)	
AS-10	1.812 (46.0)	0.385 (9.8)	1.937 (49.2)	0.040 (1.0)	


*Leads 60/40 are solder plated. AS-1C leads are copper. All others are 40% conductivity copper sheathed steel.

WIRE AND FILM TECHNOLOGIES


736 Greenway Road • PO Box 1860 • Boone, North Carolina 28607-1860 • Tel: 704-264-8861 • Fax: 704-264-8865




POWER DERATING:

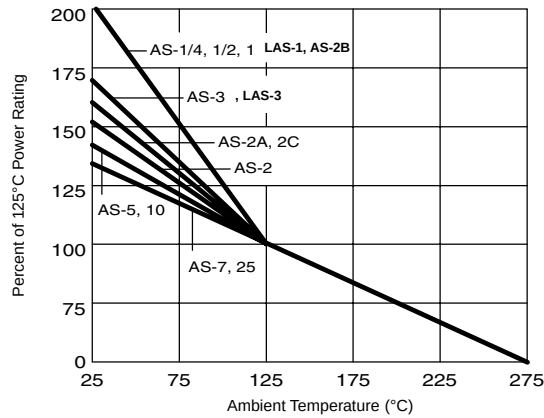


TEMPERATURE RISE @ 25°C:

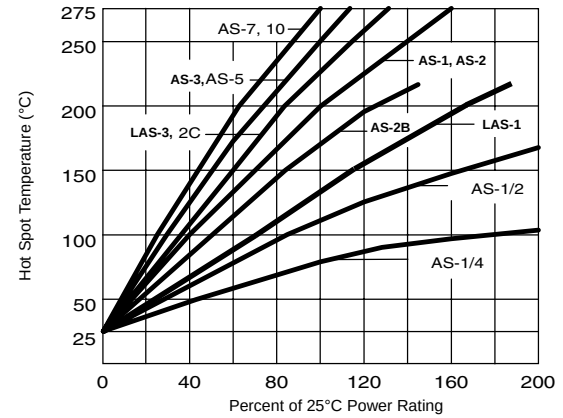

TEMPERATURE RISE @ 125°C:

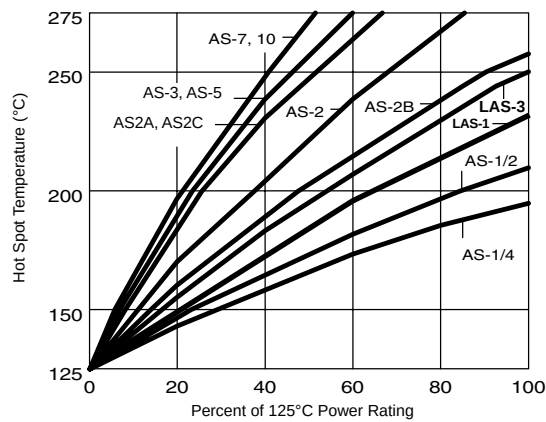

SELECTED PULSE-HANDLING CAPABILITY @ 125°C:

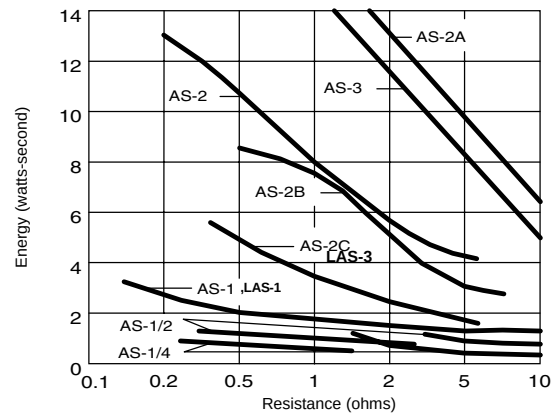

ENVIRONMENTAL TESTING:

TEST CONDITION	MAX ΔR
Load Life 1000 hours	1.0%
Moisture Resistance	1.0%
Temperature Cycle	0.5%
Short Time Overload	0.5%
Low Temperature Operation	0.5%
Solder Heat	0.25%
Shock	0.5%
Vibration	0.5%

HOW TO ORDER:

Sample Part No.:

Type AS-3 **Power** 27Ω **Resistance Value** 0.25%
 3 = 3 watts
 (See specification chart for other power ratings)
 Expressed in ohms
 (Standard EIA/MIL Values)
Tolerance ±5%, ±3%, ±1%, ±0.5%