


# Ethernet SMD Isolation Transformers

## 000-5421-30R

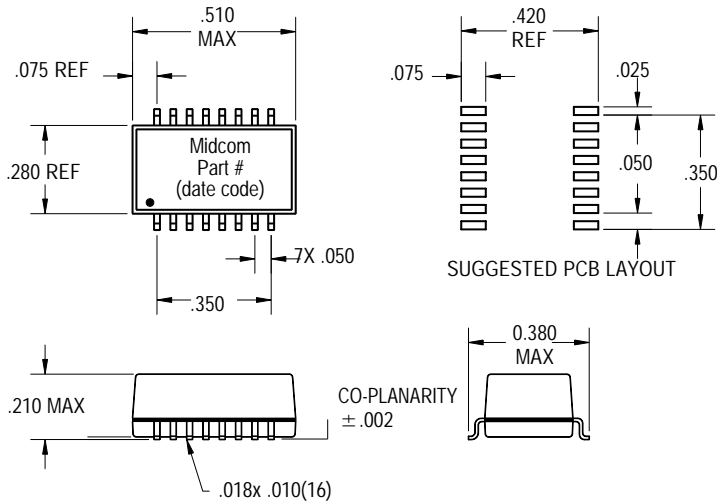

### Features

- Meets IEEE 802.3 standard
- Supports 10Base2, 10Base5, & 10Base-T
- Low-profile package
- High isolation voltage
- Transfer molded package
- Operating temperature range from -40 to +85°C
- ISO 9002 Certified manufacturing facilities

### Unit Weight

- Weight ..... 0.8 grams

### Standard Packaging

- Tape & Reel ..... 750/reel

Turns Ratio ± 5%	L H min	LL H max	C <sub>ww</sub> pF max	DCR W max	Isolation V <sub>rms</sub> min
1:1	@ 100Khz 0.020Vrms 60-90	@ 100Khz 0.020Vrms 0.20	@ 100Khz 0.020Vrms 7	@ 25°C 0.3	@60Hz, 1 min. 1500

