


PARAMETER		UNITS
Primary Impedance	600	Ω
Secondary Impedance	600	Ω
Longitudinal Balance 200 - 4000Hz @ 0dBm	50dB min.	
Primary DC Resistance	68	Ω Max.
Secondary DC Resistance	102	Ω Max.
Frequency Response 200 - 4000Hz	± 0.2	dB
Insertion Loss	2.0 Max. @ 1kHz	dB
Isolation (HI-POT)	1000	V _{RMS}
Primary DC	None	
Total Harmonic Distortion @ 400 Hz & 0 dBm	50 Min.	dB
Return Loss	18 min. 200 Hz to 4kHz 20 min. 300Hz to 4 KHz	dB dB


T-1194

600 Ω Audio Transformer

SCHMATIC DIAGRAM:




Physical Dimensions in inches (mm)

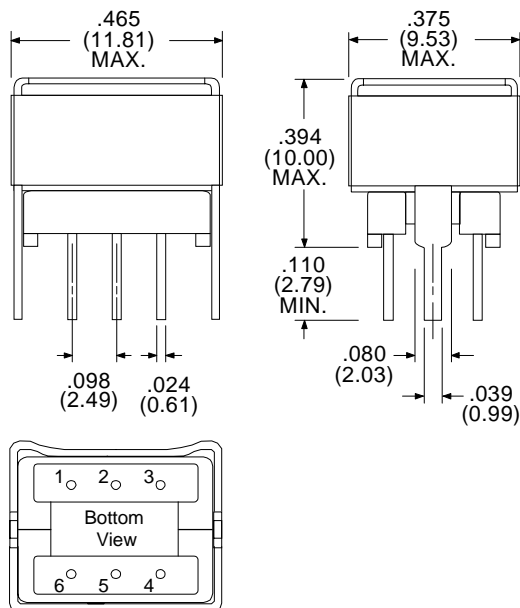

PIN POSITION GRID 0.098 (2.5)

- CLIP SET TERMINATIONS
- BOBBIN TERMINATIONS

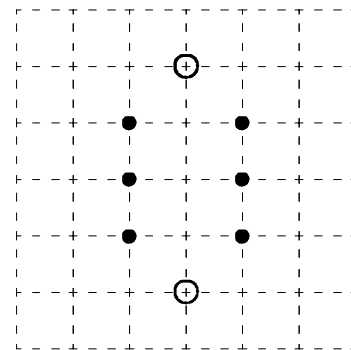

RHOMBUS INDUSTRIES INC.

FSCM NO. 16714

RHOMBUS P/N: T-1194

CUST P/N:

NAME:

DATE: 2/17/99

SHEET: 1 OF 1