



Solder Mount Pi Filters

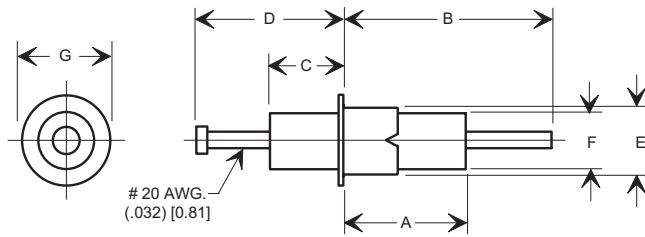


STYLE 13 THROUGH 19

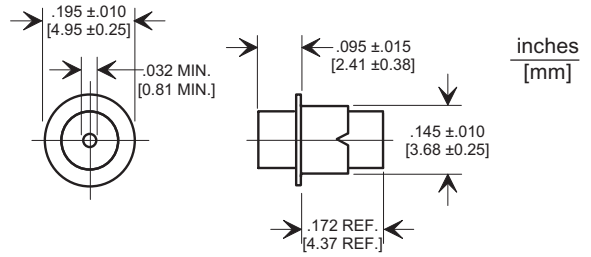

STYLE 20

DIMENSIONS FOR STYLES 13 THROUGH 19								
Style Number	MIL-PRF-15733	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E	DIM. F	DIM. G
13	/62-0003	.272 ± .025 [6.91 ± 0.64]	.438 ± .062 [11.13 ± 1.57]	.156 ± .015 [3.96 ± 0.38]	.312 ± .031 [7.92 ± 0.79]	.145 ± .015 [3.68 ± 0.38]	----	.190 ± .015 [4.83 ± 0.38]
14	/62-0004	.151 ± .031 [3.84 ± 0.79]	.780 ± .031 [19.81 ± 0.79]	.093 ± .031 [2.36 ± 0.79]	.273 ± .031 [6.93 ± 0.79]	.145 ± .015 [3.68 ± 0.38]	----	.196 ± .007 [4.98 ± 0.18]
15	/51-0002	.226 ± .022 [5.74 ± 0.56]	.780 ± .031 [19.81 ± 0.79]	.164 ± .022 [4.16 ± 0.56]	.312 ± .031 [7.92 ± 0.79]	.145 ± .015 [3.68 ± 0.38]	----	.203 ± .015 [5.16 ± 0.38]
16	/33-0001	.170 ± .027 [4.32 ± 0.69]	.780 ± .031 [19.81 ± 0.79]	.093 ± .015 [2.36 ± 0.38]	.288 ± .015 [7.32 ± 0.38]	----	.125 MAX [3.18 MAX]	.190 ± .015 [4.83 ± 0.38]
16	/33-0002♦	.250 ± .031 [6.35 ± 0.79]	.406 ± .031 [10.31 ± 0.79]	.156 ± .031 [3.96 ± 0.79]	.312 ± .031 [7.92 ± 0.79]	.145 ± .015 [3.68 ± 0.38]	.125 ± .015 [3.18 ± 0.38]	.190 ± .015 [4.83 ± 0.38]
17	/62-0001	.231 ± .046 [5.87 ± 1.17]	1.231 ± .077 [31.27 ± 1.96]	.109 ± .031 [2.77 ± 0.79]	1.109 ± .062 [28.17 ± 1.57]	.110 ± .015 [2.79 ± 0.38]	----	.143 ± .010 [3.63 ± 0.25]
18	/62-0002♦	.250 ± .031 [6.35 ± 0.79]	.406 ± .031 [10.31 ± 0.79]	.156 ± .031 [3.96 ± 0.79]	.312 ± .031 [7.92 ± 0.79]	.142 ± .007 [3.61 ± 0.18]	.122 ± .017 [3.10 ± 0.43]	.195 ± .010 [4.95 ± 0.25]
19	/51-0001	.250 ± .031 [6.35 ± 0.79]	.406 ± .031 [10.31 ± 0.79]	.156 ± .031 [3.96 ± 0.79]	.312 ± .031 [7.92 ± 0.79]	.142 ± .007 [3.61 ± 0.18]	.122 ± .017 [3.10 ± 0.43]	.195 ± .010 [4.95 ± 0.25]

Notes:
*  **Straight Lead**

TUSONIX Part Number	MIL-PRF-15733 Number	Style	Notes	Circuit	Working Voltage (dc)		Capacitance (pF)	Capacitance Tolerance	Current (A)	Minimum No-Load Insertion Loss (dB) at 25°C per MIL-Std-220					
					85°C	125°C				1MHz	10MHz	100MHz	1GHz	10GHz	
Pi Configuration															
4100-003	--	1	--	Pi	125	50	3000	GMV	15	--	7	50	65	60	
4101-505	/62-0003	13	--	Pi	--	70	1500	GMV	10	--	--	50	65	65	
4151-000	--	3	--	Pi	100	70	12,000	GMV	10	--	25	70	65	65	
4151-500	/62-0004	14	--	Pi	--	70	12,000	GMV	10	--	22	70	--	65	
4151-001	--	5	--	Pi	100	70	22,000	GMV	10	--	35	70	70	70	
4151-501	/51-0002	15	--	Pi	--	70	22,000	GMV	10	--	25	70	70	70	
4151-003	--	12	--	Pi	100	70	60,000	GMV	10	--	60	75	75	75	
4100-000	--	7	--	Pi	250	125	1500	GMV	10	--	6	45	60	60	
4101-000	--	20	--	Pi	250	125	1750	GMV	10	--	5	35	50	50	
4101-002	--	2	--	Pi	250	125	1750	GMV	10	--	5	50	60	60	
4101-003	--	4	--	Pi	250	125	1750	GMV	10	--	5	50	60	60	
4101-004	--	6	--	Pi	250	125	1750	GMV	10	--	5	50	60	60	
4101-502	/33-0001	16	--	Pi	--	125	1750	GMV	10	--	--	50	60	60	
4101-503	/33-0002	16	*	Pi	--	125	1750	GMV	10	--	--	50	60	60	
4101-500	/66-0001	8	--	Pi	--	125	1750	GMV	10	--	5	35	50	50	
4100-056	--	9	--	Pi	250ac	200dc	1000	±20%	10	--	3	20	55	--	
4100-002	--	1	--	Pi	350	200	1500	GMV	15	--	5	25	60	60	
4101-001	--	17	--	Pi	350	200	1500	GMV	10	--	3	45	70	70	
4101-501	/62-0001	17	--	Pi	--	200	1500	GMV	10	--	3	45	70	70	
4100-500	/62-0002	18	*	Pi	--	200	1500	GMV	10	--	5	45	70	--	
4100-057	--	9	--	Pi	250ac	200dc	1500	GMV	10	--	5	45	70	--	
4102-000	--	10	--	Pi	350	200	3000	GMV	10	--	8	55	65	65	
4100-053	--	9	--	Pi	250ac	200dc	5000	GMV	10	--	18	60	70	--	
4101-504	/51-0001	19	--	Pi	200	--	5500	GMV	10	--	15	55	70	70	
4106-000	--	11	--	Pi	500dc	500dc	350ac	3000	GMV	25	--	50	50	50	
4106-001	--	11	--	Pi	1000	500	4500	GMV	25	--	8	50	70	70	

Drawings not to scale.