



## Single In-Line Solid Socket Strips

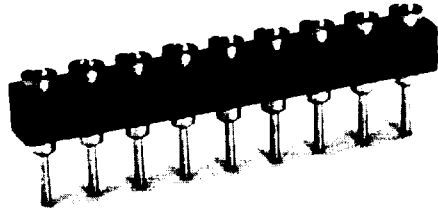

**Socket Strip  
-01 Terminal Shown**

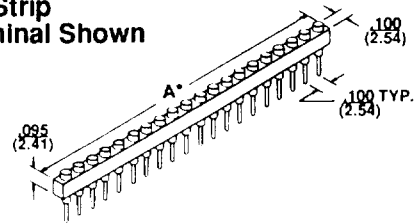

A = Pitch .100" (2.54mm) x number of terminals.

### Features:

- Molded in lengths 3-20, 30 & 32. For other lengths consult factory.
- Board to board stackable.
- .100" (2.54 mm) pin to pin spacing.
- Multiple finger contacts for reliability.
- Tapered entry for ease of insertion.
- Closed bottom sleeve for 100% anti-wicking of solder.

### Terminals and Contacts:

Terminal: Brass per QQ-B-626  
 Contact: Beryllium Copper per QQ-C-533

### Plating:

Terminal: Gold/Nickel or Tin-Lead/Nickel  
 Contact: Gold/Nickel or Tin-Lead/Nickel


### Body Material:

Glass Filled Thermoplastic  
 Polyester (P.B.T.), U.L. Rated 94V-O,  
 -60°C to 140°C (-76°F to 284°F)


Also available in high temperature glass filled thermoplastic. Consult factory for more information.



### Terminal Information

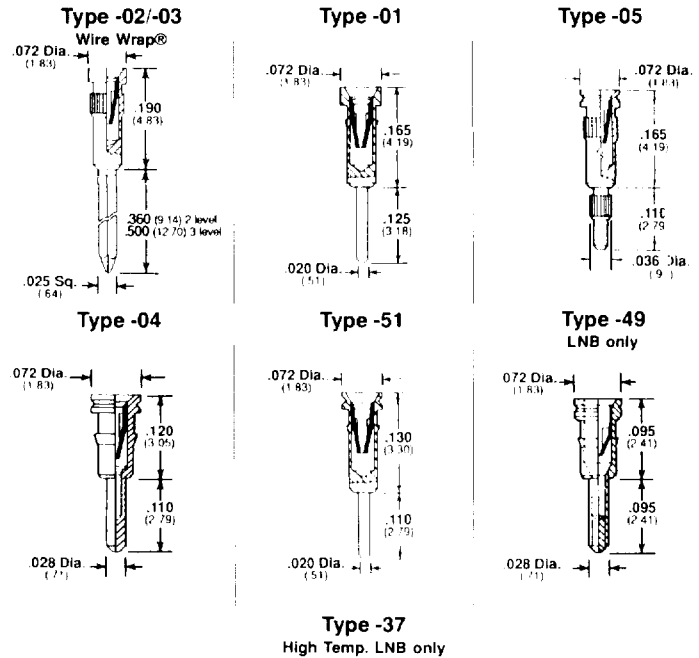

### How To Order

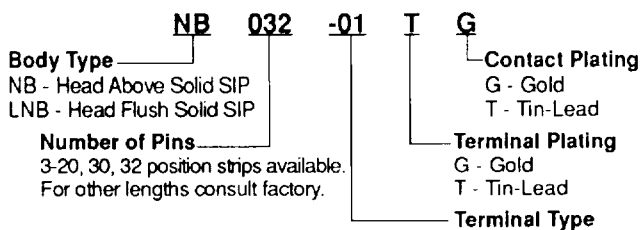

Additional terminal types available.  
 See terminal section for detailed terminal information.

Wire Wrap® is a registered trademark of Gardner Denver Co.