



2 • ROW


Cable to Cable

.025"


NM, NM

9 thru 85 Contacts



NM-222-025-261-THAC
(METAL)

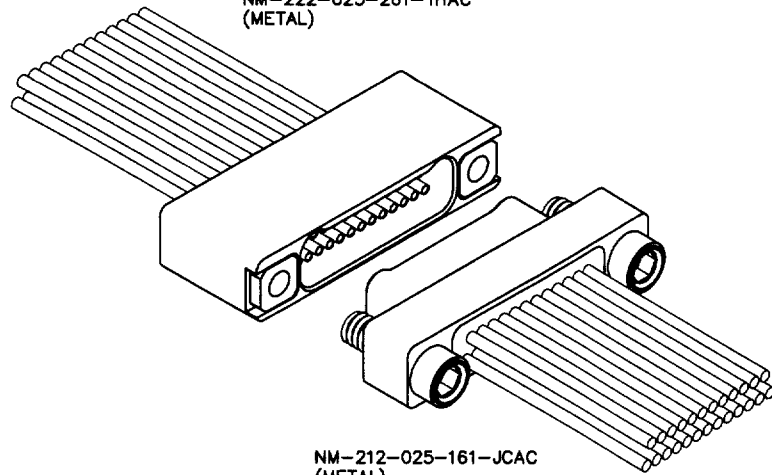


NM-212-025-161-JCAC
(METAL)

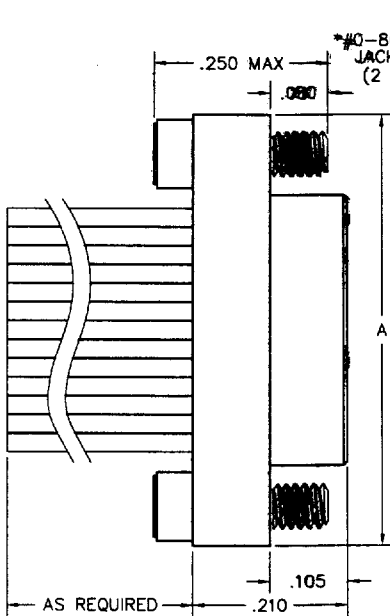

PLUG

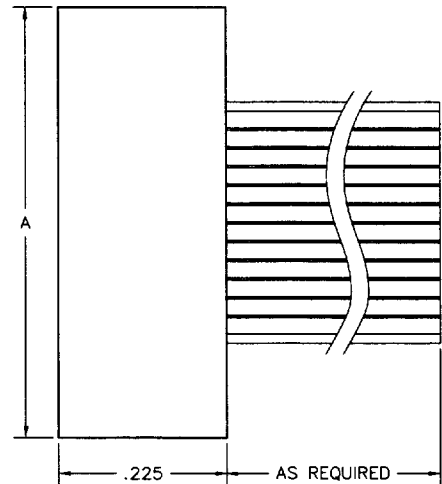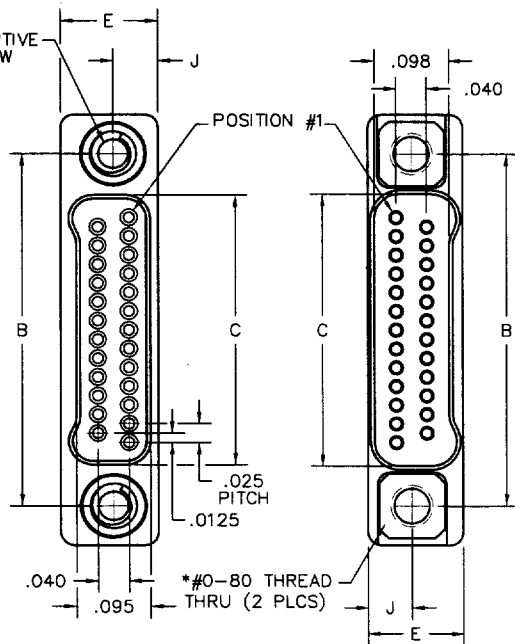


RECEPTACLE



PIN CONTACT
3 TINE SPRING MEMBER, CRIMP

DIMENSIONS							
SIZE	A	B	C		E	J	*HARDWARE
			PLUG	RCPT			
9	.375	.270	.160	.163	.125	.0575	#0-80 THREAD
15	.450	.345	.235	.238			
21	.525	.420	.310	.313			
25	.575	.470	.360	.363			
31	.650	.545	.435	.438			
37	.725	.620	.510	.513			
51	.900	.795	.685	.688			
65	1.075	.970	.860	.863			
69	1.125	1.020	.910	.913	.150	.0700	#2-56 THREAD
85	1.377	1.246	1.110	1.113			



SOCKET CONTACT
MACHINED TUBE, CRIMP

PLUG: NM-212-025-161-JCAC
 RECEPTACLE: NM-222-025-261-THAC
 XX-XXX-XXX-XXX-XXXX

PLUG
RECEPTACLE

SERIES

NM .025" Metal I/O Connector

NM .025" Metal I/O Connector

BODY

2 2-Row

2 2-Row

BODY STYLE:

1 Plug, straight

BODY STYLE:

2 Receptacle, straight

BODY MATERIAL:

 2 Liquid Crystal Polymer w/ electroless nickel shell
 3 Liquid Crystal Polymer w/ electrodeposited cadmium shell

BODY MATERIAL:

 2 Liquid Crystal Polymer w/ electroless nickel shell
 3 Liquid Crystal Polymer w/ electrodeposited cadmium shell

SIZE

XXX Number of contacts (009, 015, 021, 025, 031, 037, 051, 065, 069, or 085)

XXX Number of contacts (009, 015, 021, 025, 031, 037, 051, 065, 069, or 085)

CONTACTS

TYPE CONTACTS/TERMINATIONS:

16 Pin, straight, crimped wire

TYPE CONTACTS/TERMINATIONS:

26 Socket, straight, crimped wire

PLATING OPTIONS:

1 50 u" Au contacts

PLATING OPTIONS:

1 50 u" Au contacts

HARDWARE

STYLE OF HARDWARE:

 00 None
 JC Turning jackscrews, captivated #0-80*
 TH Threaded hole, #0-80 UNF*

STYLE OF HARDWARE:

 00 None
 JC Turning jackscrews, captivated #0-80*
 TH Threaded hole, #0-80 UNF*

WIRING OPTIONS:

XX See wiring codes, Page N-51

WIRING OPTIONS:

XX See wiring codes, Page N-51

* = #2-56 thread on 85 position connectors