


3~15 POS.

2 POS.



35.0	38.8	40.0	15	1-	-5
32.5	36.3	37.5	14	1-	-4
30.0	33.8	35.0	13	1-	-3
27.5	31.3	32.5	12	1-	-2
25.0	28.8	30.0	11	1-	-1
22.5	26.3	27.5	10	1-	0
20.0	23.8	25.0	9	0-	-9
17.5	21.3	22.5	8	0-	-8
15.0	18.8	20.0	7	0-	-7
12.5	16.3	17.5	6	0-	-6
10.0	13.8	15.0	5	0-	-5
7.5	11.3	12.5	4	0-	-4
5.0	8.8	10.0	3	0-	-3
2.5	6.3	7.5	2	0-	0-11241-2
C	B	A	POS.	PART NUMBER	

1. MATERIAL : HOUSING - NYLON 66 (UL94V-0)
POST - TIN LEAD PLATED BRASS.
2. PRODUCT SPEC : 108-57012
3. MATING COUNTER PART NUMBER : P/N 177534

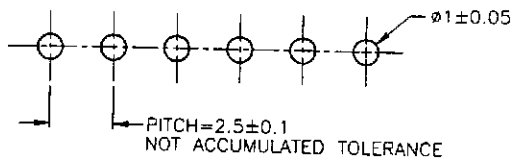

RECOMMENDED PC BOARD LAYOUT
(PC BOARD THK=1.0~1.6)

© 1998 BY AMP MANUFACTURING TAIWAN LTD. ALL RIGHTS RESERVED. PRODUCTS ARE COVERED BY PATENTS AND/OR PATENTS PENDING		AMP AMP MANUFACTURING TAIWAN LTD.	
(DATE RANGE)	(INSULATION IN.)	(JOB/PROJ.)	
(MATERIAL)	(FINISH)	POST HEADER ASSEMBLY, SQUARE PIN ,RIGHT ANGLE TYPE	
SEE NOTE 1.	SEE NOTE 1.	2.5 mm PITCH METRIC INTERCONNECT SYSTEM	
GENERAL TOLERANCE		SIZE	UPC (IND.)
BELOW 10 ±0.2		A3	DW
10 ~ 30 ±0.25		C-11241	
30 ~ 100 ±0.3		SHEET	
ANGEL ±0.3°		1 OF 1	
DATE	BY	CHK	DATE
0	FIRST OFFICIAL RELEASED	DR	REV
LTR	REVISION RECORD	OR	DATE

(CUSTOMER DRAWING)

DIMENSIONS IN mm. DO NOT SCALE PRINT