


DO NOT SCALE
DIMENSIONS IN mm

METRIC

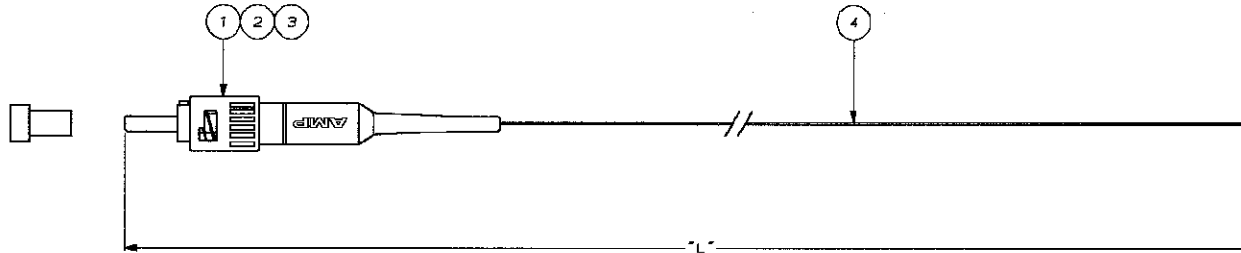

NOTES.

1. ATTENUATION $\leq 0,3$ dB, MEASURED AT 1300 nm ACC. IEC 874-1
CLAUSE 4.4.7. METHOD 7 EQUILIBRIUM MODE CONDITION
2. ACTUAL ATTENUATION SUPPLIED ON TEST RESULT SHEET PER INDIVIDUALLY PACKED ASSEMBLY
3. CABLE INFO:
 - FIBRE CORE: 50 μ m
 - COATING MATERIAL: ACRYLATE
 - COATING COLOUR: GREEN
 - OUTER DIAMETER: 250 μ m

PART NUMBER	"L" (METER)
0-0349258-1	0,5 -0/+0,1
0-0349258-2	1,0 -0/+0,2
0-0349258-3	1,5 -0/+0,2
0-0349258-4	2,0 -0/+0,2
0-0349258-5	2,5 -0/+0,2
0-0349258-6	3,0 -0/+0,2
0-0349258-7	3,5 -0/+0,2
0-0349258-8	4,0 -0/+0,2
0-0349258-9	4,5 -0/+0,2
1-0349258-0	5,0 -0/+0,2

L	DESCRIPTION	ITEM
-	FO COATED FIBRE 50/125/250, GREEN	4
1	ST BUFFER BOOT, BLACK	3
1	ST CERAMIC, OVERMOLDED	2
1	FERRULE DUST CAP, BLACK	1

QTY	PART NUMBER	DESCRIPTION	ITEM
-	-	CUSTOMER DRAWING	FOR REFERENCE ONLY
-	-	© COPYRIGHT 19- BY AMP-HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING. THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION	
-	-	AMP-HOLLAND B.V. 's-Hertogenbosch, The Netherlands.	
-	-	AMP	
-	-	NAME	
A	EH-0491-98	FOCA ST CERAMIC PIGTAIL	50/125/250 BARE FIBRE

DR.	CHK.	APP.	DATE
DR.:	CHK.:	APP.:	DATE:
03 APR 98			

REV. LTR.	SHEET
A	1 of 1