
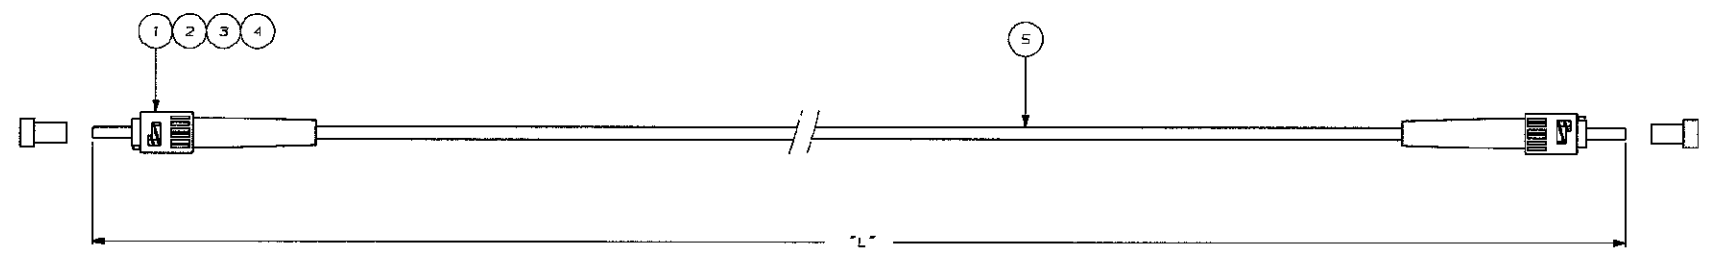


DO NOT SCALE  
DIMENSIONS IN mm

METRIC



NOTES.

1. ATTENUATION  $\leq 0,3$  dB, MEASURED AT 1300 nm ACC. IEC 874-1  
CLAUSE 4.4.7. METHOD 7 EQUILIBRIUM MODE CONDITION
2. ACTUAL ATTENUATION SUPPLIED ON TEST RESULT SHEET PER INDIVIDUALLY PACKED ASSEMBLY
3. CABLE INFO:
  - FIBRE CORE: 50  $\mu$ m
  - JACKET MATERIAL: LOW SMOKE ZERO HALOGEN
  - JACKET COLOUR: ORANGE
  - OUTER DIAMETER: 2,5 mm

PART NUMBER	"L" ( METER )
0-0349560-1	1,0 -0/+0,2
0-0349560-2	2,0 -0/+0,2
0-0349560-3	3,0 -0/+0,2
0-0349560-4	4,0 -0/+0,2
0-0349560-5	5,0 -0/+0,2
0-0349560-6	6,0 -0/+0,2
0-0349560-7	7,0 -0/+0,2
0-0349560-8	8,0 -0/+0,2
0-0349560-9	9,0 -0/+0,2
1-0349560-0	10,0 -0/+0,2

QTY	PART NUMBER	DESCRIPTION	ITEM
-	-	FO CABLE 50/125 DES SIMPLEX 2,5mm	5
-	-	ST BOOT, BLACK	4
-	-	ST CRIMP EYELET	3
-	-	ST CERAMIC, OVMOLDED	2
-	-	FERRULE DUST CAP, BLACK	1

CUSTOMER DRAWING		FOR REFERENCE ONLY WILL NOT BE UPDATED	
© COPYRIGHT 19- BY AMP-HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING. THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION TO _____			
<b>AMP</b>		AMP-HOLLAND B.V. 's-Hertogenbosch, The Netherlands.	
B EH-0491-98		FOCA ST CERAMIC SIMPLEX 50/125 SIMPLEX 2,5mm	
LTR.	REVISION REASON	DR.	CHK.
DR.: M.N.J.M.B.S.	CHK.: M.N.J.M.B.S.	DR.: M.N.J.M.B.S.	CHK.: M.N.J.M.B.S.
DATE: 03 APR 88	DATE: 03 APR 88	DATE: 03 APR 88	DATE: 03 APR 88
Dwg. No. C-349560		REV. LTR.	SHEET
		B	1 of 1