


DO NOT SCALE
DIMENSIONS IN mm

METRIC

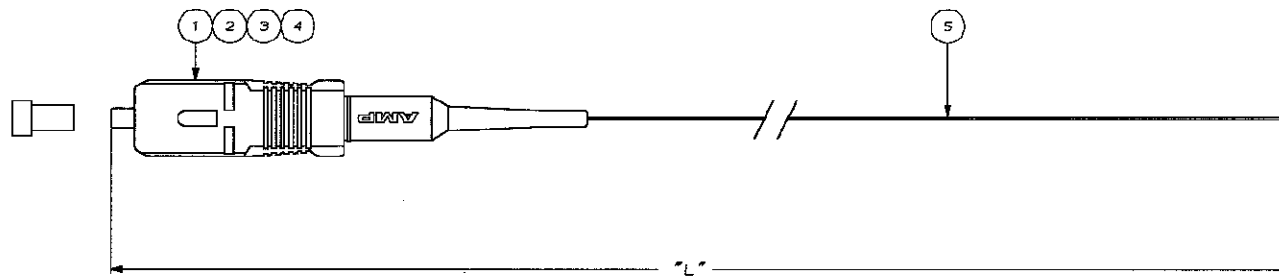

NOTES:

- ATTENUATION $\leq 0,3$ dB, MEASURED AT 1300 nm ACC. IEC 874-1
CLAUSE 4.4.7. METHOD 7 EQUILIBRIUM MODE CONDITION
- ACTUAL ATTENUATION SUPPLIED ON TEST RESULT SHEET PER
INDIVIDUALLY PACKED ASSEMBLY
- CABLE INFO:
 - FIBRE CORE: 50 μ m
 - BUFFER MATERIAL: LOW SMOKE ZERO HALOGEN
 - BUFFER COLOUR: GREEN
 - OUTER DIAMETER: 900 μ m

PART NUMBER	"L" (METER)
0-0349568-1	0,5 -0/+0,1
0-0349568-2	1,0 -0/+0,2
0-0349568-3	1,5 -0/+0,2
0-0349568-4	2,0 -0/+0,2
0-0349568-5	2,5 -0/+0,2
0-0349568-6	3,0 -0/+0,2
0-0349568-7	3,5 -0/+0,2
0-0349568-8	4,0 -0/+0,2
0-0349568-9	4,5 -0/+0,2
1-0349568-0	5,0 -0/+0,2

QTY	PART NUMBER	DESCRIPTION	ITEM
1	-	FO BUFFERED FIBRE DES 50/125/900, GREEN	5
1	-	SC BUFFER BOOT, BLACK	4
1	-	SC CERAMIC, OVERMOLDED	3
1	-	SC HOUSING, BEIGE	2
1	-	FERRULE DUST CAP, BLACK	1

SEE TABLE	QTY	DESCRIPTION	FOR REFERENCE ONLY WILL NOT BE UPDATED
-	-	CUSTOMER DRAWING	-
-	-	© COPYRIGHT 19- BY AMP-HOLLAND B.V.	-
-	-	ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.	-
-	-	THIS DRAWING IS UNPUBLISHED	-
-	-	RELEASED FOR PUBLICATION	-
-	-	AMP-HOLLAND B.V.	-
-	-	Herengracht 10, 3713 CA Dordrecht, The Netherlands.	-
B	EH-0491-98	NAME	-
LTR.	REVISION RECORD	DR. CHK. DATE	-
DR. MANJUS	CHK. N. J. B. S.	APP. K. J. B. S.	DWG. No.
DATE: 03 APR 98	DATE: 03 APR 98	DATE: 03 APR 98	C-349568
			REV. LTR. SHEET
			B 1 of 1 A2