


DO NOT SCALE
DIMENSIONS IN mm

METRIC

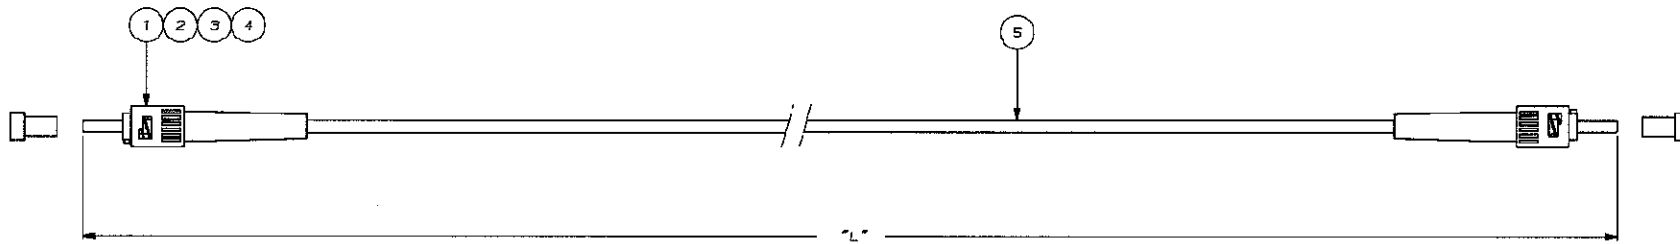

NOTES.

1. ATTENUATION $\leq 0,3$ dB, MEASURED AT 1300 nm ACC. IEC 874-1
CLAUSE 4.4.7. METHOD 7 EQUILIBRIUM MODE CONDITION
2. ACTUAL ATTENUATION SUPPLIED ON TEST RESULT SHEET PER INDIVIDUALLY PACKED ASSEMBLY
3. CABLE INFO:
 - FIBRE CORE: 62,5 μ m
 - JACKET MATERIAL: LOW SMOKE ZERO HALOGEN
 - JACKET COLOUR: ORANGE
 - OUTER DIAMETER: 2,5 mm

PART NUMBER	"L" (METER)
0-0349573-1	1,0 -0/+0,2
0-0349573-2	2,0 -0/+0,2
0-0349573-3	3,0 -0/+0,2
0-0349573-4	4,0 -0/+0,2
0-0349573-5	5,0 -0/+0,2
0-0349573-6	5,0 -0/+0,2
0-0349573-7	7,0 -0/+0,2
0-0349573-8	8,0 -0/+0,2
0-0349573-9	9,0 -0/+0,2
1-0349573-0	10,0 -0/+0,2

1	-	FO CABLE 62,5/125 DES SIMPLEX 2,5mm	5
2	-	ST BOOT, BLACK	4
2	-	ST CRIMP EYELET	3
2	-	ST CERAMIC, OVERMOLDED	2
2	-	FERRULE DUST CAP, BLACK	1
PART NUMBER		DESCRIPTION	ITEM
QTY	-	-	-
SEE TABLE	B	EH-0491-98	NY NY 03 APR 98
DR.	M. MARIS	CHK.	M. MARIS
DATE:	03 APR 98	DATE:	03 APR 98
REV. LTR.		DS	DATE
B		DS	DATE
C-349573		REV. LTR.	SHEET
B		1	of 1
A2			