


DO NOT SCALE  
DIMENSIONS IN mm

METRIC

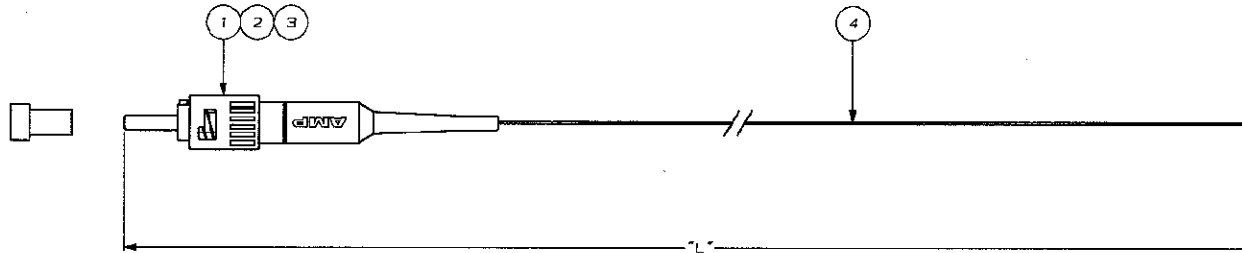

**NOTES:**

1. ATTENUATION  $\leq 0.3$  dB, MEASURED AT 1300 nm ACC. IEC 874-1  
CLAUSE 4.4.7. METHOD 7 EQUILIBRIUM MODE CONDITION
2. ACTUAL ATTENUATION SUPPLIED ON TEST RESULT SHEET PER INDIVIDUALLY PACKED ASSEMBLY
3. CABLE INFO:
  - FIBRE CORE: 62,5  $\mu$ m
  - BUFFER MATERIAL: LOW SMOKE ZERO HALOGEN
  - BUFFER COLOUR: BLUE
  - OUTER DIAMETER: 900  $\mu$ m

PART NUMBER	"L" ( METER )
0-0349582-1	0,5 -0/+0,1
0-0349582-2	1,0 -0/+0,2
0-0349582-3	1,5 -0/+0,2
0-0349582-4	2,0 -0/+0,2
0-0349582-5	2,5 -0/+0,2
0-0349582-6	3,0 -0/+0,2
0-0349582-7	3,5 -0/+0,2
0-0349582-8	4,0 -0/+0,2
0-0349582-9	4,5 -0/+0,2
1-0349582-0	5,0 -0/+0,2

QTY	PART NUMBER	DESCRIPTION	ITEM
1	--	FO BUFFERED FIBRE DES 62,5/125/900, BLUE	4
1	--	ST BUFFER BOOT, BLACK	3
1	--	ST CERAMIC, OVERMOLDED	2
1	--	FERRULE DUST CAP, BLACK	1

SEE TABLE	REV. LTR.	REVISION RECORD	DR. CHR.	DATE	NAME	DATE	DRG. No.	REV. LTR.	SHEET
B	EH-0491-98	NN	NN	03 APR 98			C-349582	B	1 of 1

**CUSTOMER DRAWING** FOR REFERENCE ONLY  
WILL NOT BE UPDATED  
© COPYRIGHT 19-- BY AMP-HOLLAND B.V.  
ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.  
THIS DRAWING IS UNPUBLISHED  
RELEASED FOR PUBLICATION  
-19-  
**AMP** | AMP-HOLLAND B.V.  
Herengracht,  
The Netherlands.