


DO NOT SCALE
DIMENSIONS IN mm

METRIC

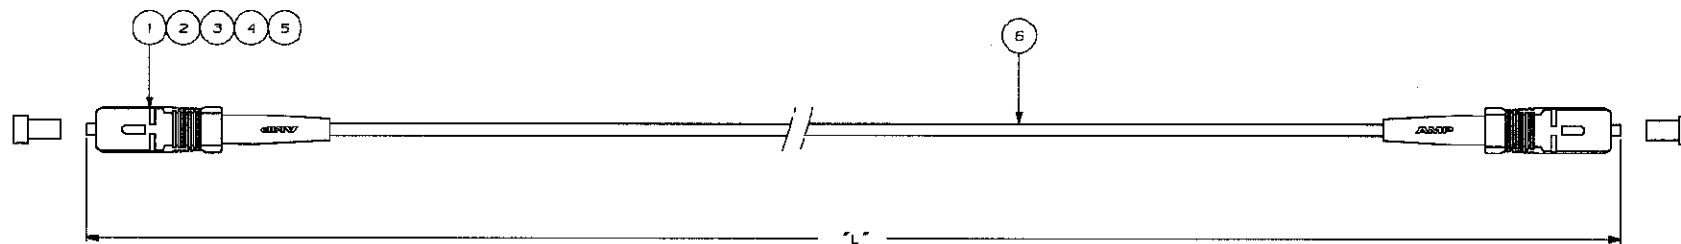

NOTES:

- ATTENUATION $\leq 0,3$ dB, MEASURED AT 1300 nm ACC. IEC 874-1
CLAUSE 4.4.7. METHOD 7 EQUILIBRIUM MODE CONDITION
- ACTUAL ATTENUATION SUPPLIED ON TEST RESULT SHEET PER INDIVIDUALLY PACKED ASSEMBLY
- CABLE INFO:
 - FIBRE CORE: 62,5 μ m
 - JACKET MATERIAL: LOW SMOKE ZERO HALOGEN
 - JACKET COLOUR: ORANGE
 - OUTER DIAMETER: 2,5 mm

PART NUMBER	"L" (METER)
0-0349577-1	1,0 -0/+0,2
0-0349577-2	2,0 -0/+0,2
0-0349577-3	3,0 -0/+0,2
0-0349577-4	4,0 -0/+0,2
0-0349577-5	5,0 -0/+0,2
0-0349577-6	6,0 -0/+0,2
0-0349577-7	7,0 -0/+0,2
0-0349577-8	8,0 -0/+0,2
0-0349577-9	9,0 -0/+0,2
1-0349577-0	10,0 -0/+0,2

1	-	FO CABLE 62,5/125 DES SIMPLEX 2,5mm	6
2	-	SC BOOT, BLACK	5
2	-	SC CRIMP EYELET	4
2	-	SC CERAMIC, OVERMOLDED	3
2	-	SC HOUSING, SIMPLEX	2
2	-	FERRULE DUST CAP, BLACK	1
PART NUMBER		DESCRIPTION	ITEM
-		CUSTOMER DRAWING	FOR REFERENCE ONLY WILL NOT BE UPDATED
-		© COPYRIGHT 10 - BY AMP-HOLLAND B.V.	
-		ALL INTERNATIONAL RIGHTS RESERVED, AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.	
-		THIS DRAWING IS UNCLASSIFIED	
-		RELEASED FOR PUBLICATION	
-		AMP	AMP-HOLLAND B.V. s-Herengobosch, The Netherlands.
B		EH-0491-98	NV NV 03 APR 98
LTR.		REVISION RECORD	DR. CRK. DATE
DR.		N.N.J.A.U.S	CHK. N.N.J.A.U.S
DATE. 03 APR 98		DATE. 2-98	DATE. 2-98
-		DWG. No.	REV. LTR. SHEET
-		C-349577	B 1 of 1 A2