


DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

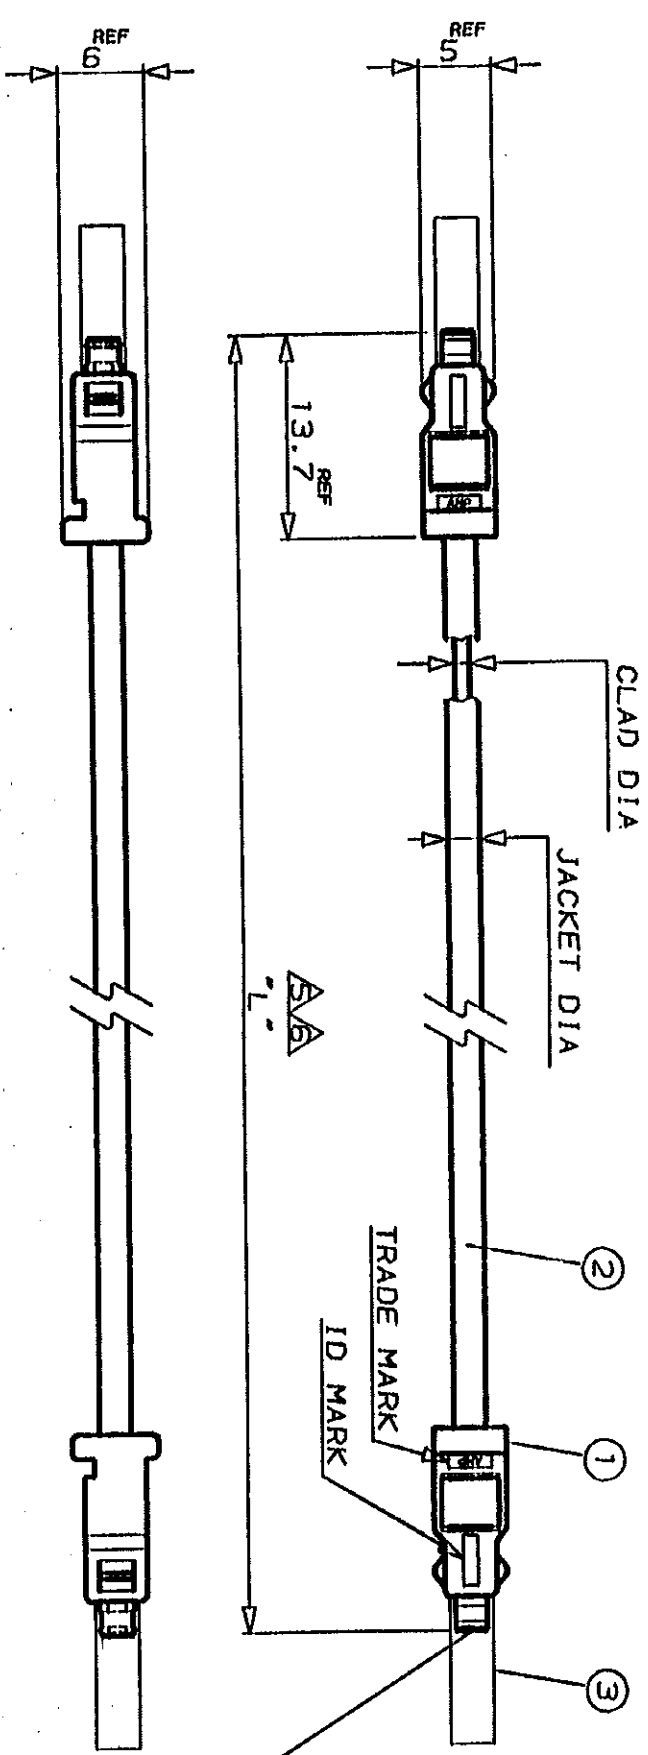

NOTE: 1 OPTICAL POWER ATTENUATION IS 1.0DB MAX
COMPARE WITH MASTER CABLE ASS'Y

2 CABLE RETENTION FORCE FOR PLUG (ケーブル保持力)
FIBER CABLE 0.50X1.50 : 1.5KG MIN
0.750X1.80 : 4.0KG MIN
0.750X2.20 : 4.0KG MIN
1.00X2.20 : 5.0KG MIN

3 FIBER CABLE ENDS TREATED BY HOT-PLATE FINISHING
(ケーブル末端はホットプレート処理)


4 STORAGE CONDITION (保存条件)
MINIMUM BENDING RADIUS: 100mm (最小曲げ半径)
STORAGE TEMPERATURE: -40-70°C (保存周囲温度)
△ [STABLE] INDICATES THE RELATION BETWEEN P/N AND LENGTH "L"
(ΔにP/Nと長さ"L"の関係を示す)
△ TOLERANCE AFTER CABLE ASSEMBLY.
(ケーブルアッセンブリ公差)

L=1000-1900mm : ±10mm
L=2000-4900mm : ±20mm
L=5000-9900mm : ±30mm

TABLE 1) △

(DIMENSION, mm)

8-9	18900	5-9	18900	4-9	19000	2-9	19000
8-8	18800	5-8	18800	4-8	18800	2-8	18800
8-7	18700	5-7	18700	4-7	18700	2-7	18700
8-6	18600	5-6	18600	4-6	18600	2-6	18600
8-5	18500	5-5	18500	4-5	18500	2-5	18500
8-4	18400	5-4	18400	4-4	18400	2-4	18400
8-3	18300	5-3	18300	4-3	18300	2-3	18300
8-2	18200	5-2	18200	4-2	18200	2-2	18200
8-1	18100	5-1	18100	4-1	18100	2-1	18100
8-0	18000	5-0	18000	4-0	18000	2-0	18000
7-9	17900	5-9	17900	3-9	17900	1-9	17900
7-8	17800	5-8	17800	3-8	17800	1-8	17800
7-7	17700	5-7	17700	3-7	17700	1-7	17700
7-6	17600	5-6	17600	3-6	17600	1-6	17600
7-5	17500	5-5	17500	3-5	17500	1-5	17500
7-4	17400	5-4	17400	3-4	17400	1-4	17400
7-3	17300	5-3	17300	3-3	17300	1-3	17300
7-2	17200	5-2	17200	3-2	17200	1-2	17200
7-1	17100	5-1	17100	3-1	17100	1-1	17100
7-0	17000	5-0	17000	3-0	17000	1-0	17000

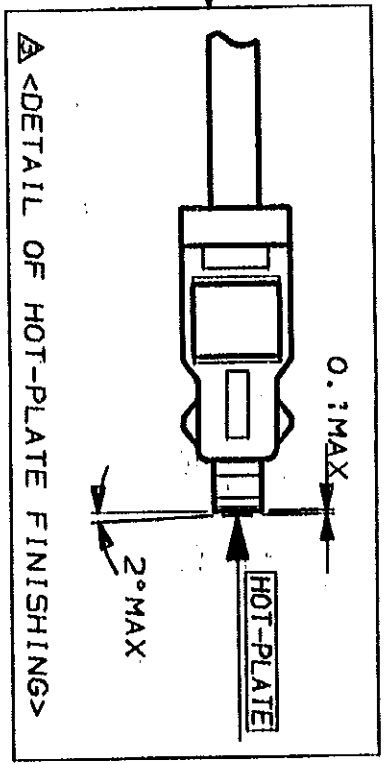

ITEM	DESCRIPTION	Qty	UL STYLE NO.	CLAD DIA	JACKET DIA	ID MARK	PART NUMBER
3	PROTECTION TUBE	2	5301	1.0	2.2	100-22	*-173399-*
2	FIBER CABLE UL TYPE (CW-1)	2					
1	Mini-DNP PLUG ASS'Y	2	NA=0.5 (挿口数)				
3	PROTECTION TUBE	2	ATTENUATION =0.25dB/m (伝送損失)	0.75	2.2	75-22	*-173397-*
2	FIBER CABLE UL TYPE (CW-1)	2					
1	Mini-DNP PLUG ASS'Y	2	OPET TEMP. =-40-70°C (使用温度)	0.75	1.8	75-18	*-173395-*
3	PROTECTION TUBE	2					
2	FIBER CABLE UL TYPE (CW-1)	2		0.5	1.5	50-15	*-173393-*
1	Mini-DNP PLUG ASS'Y	2					

© 1989 BY AMP (JAPAN) LTD.
ALL RIGHTS RESERVED.
AMP PRODUCTS COVERED BY PATENTS
AND OR PATENTS PENDING

AMP AMP (JAPAN) LTD.
Tokyo, Japan

WIRE RANGE	INSULATION DIA	NAME
AMP CLASS - J		Mini-DNP SIMPLEX FIBER CABLE ASS'Y
MATERIAL	FINISH	0.5x1.50 SUPER GRADE UL TYPE (1000-9900mm)
		GENERAL TOLERANCE
		0-10 : ±0.2
		10-30 : ±0.25
		30-100 : ±0.3
		ANGLES : ±3°
DR. H. SHOJI	DE. H. SHOJI	SCALE 2-1
CHK. Z. SHIBA	APP. Z. SHIBA	REV. 0
DR. H. SHOJI	DE. H. SHOJI	SHEET 1 OF 1
CHK. Z. SHIBA	APP. Z. SHIBA	

CUSTOMER DRAWING

- [Home](#)
- [Part Number Search](#)
- [Text Search](#)
- [Alternate Part Search](#)
- [Multiple Part Comparison](#)
- [Alphabetical Search](#)
- [Brand Search](#)
- [Industry Product Search](#)
- [Product Type Search](#)
- [Product Family Search](#)
- [Competitor Cross Reference](#)
- [Document Number Search](#)
- [Lead Free Solutions](#)
- [Help/Glossary](#)

Current Brand View

AMP

[View All Tyco Electronics Brands](#)

Click to activate links to all other products

Fiber Optic Products

Plastic Fiber Components

AMP

1-173393-1 -- 4 of 5 products

Active

[Active](#)

(Tyco Electronics P/N: 1-173393-1)

Previous	Next	Sales Information	AMP ACES	Step Search Screen
			Related Documents	General Information
			Pricing	Product Availability

Please use the customer drawing for all design activity.

■ **Customer Drawing: 173393, Rev. O**

Document Title: MINI DNP SIMPLEX FIBER CABLE ASSY
0.5X 1.5 SUPER GRADE UL TYPE (1000 9900MM)

[165818.pdf](#) [165818.pdf](#) (78K)

The photographs and/or line drawings below are representative images of a product for viewing purposes only.

[Product Usage](#)

Searchable Features:

Brand:	AMP
Product Type:	Cable Assembly
Connector Type:	Mini-DNP
No. of Positions:	Single
Gender:	Plug
Cable Length (mm [in]):	1099.82 [43.300]
Fiber Size (Micron):	0.5 mm

Jacket Outer Diameter (mm [in]):

1.50 [.059]

[Copyright](#) and [Privacy Statement](#)

Visit [Tyco International, Ltd.](#)

[Products](#) | [Brands](#) | [Industries](#) | [Customer Service](#) | [About](#) | [Home](#)