




SSMB Cable Connectors


Right Angle Cable Jacks

Crimp type for flexible cable

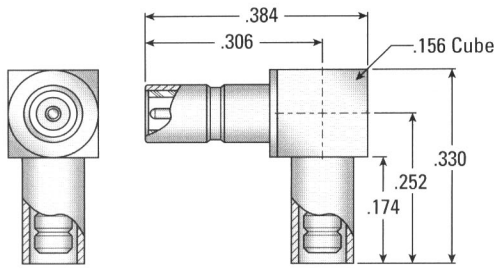

AEP P/N
7441-1521-0XX*


Solder type for semi-rigid cable

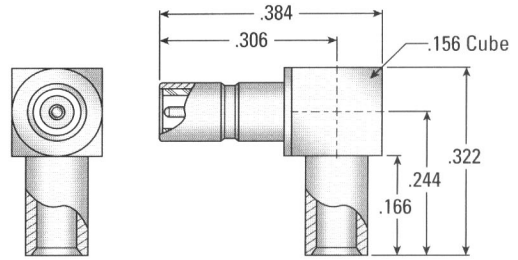

AEP P/N
7441-1561-0XX*

Straight Bulkhead Mounted Cable Jacks (.093" max panel thickness)


Crimp type for flexible cable

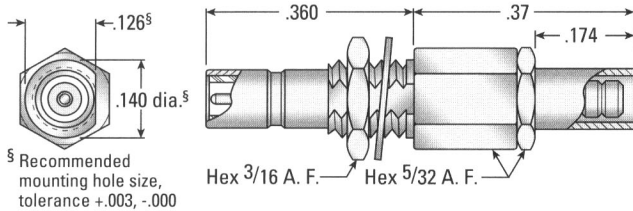

§ Recommended mounting hole size, tolerance +.003, -.000

AEP P/N
7203-1571-0XX*

Solder type for semi-rigid cable

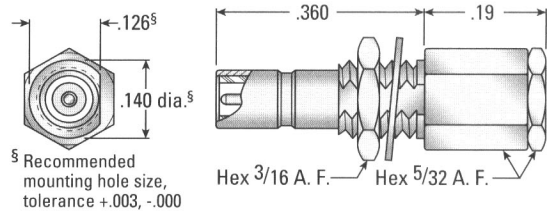


§ Recommended mounting hole size, tolerance +.003, -.000

AEP P/N
7203-1541-0XX*

Right Angle Bulkhead Mounted Cable Jacks (.125" max panel thickness)


Crimp type for flexible cable

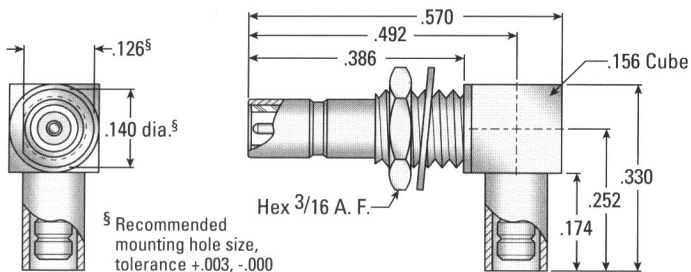

§ Recommended mounting hole size, tolerance +.003, -.000

AEP P/N
7406-1521-0XX*

Solder type for semi-rigid cable

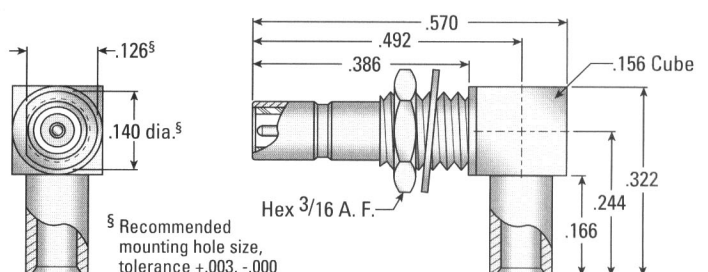

§ Recommended mounting hole size, tolerance +.003, -.000

AEP P/N
7406-1561-0XX*

These connectors can be supplied with other mating end lengths to accommodate a wide range of panel thicknesses—contact factory for availability.

*Substitute the appropriate cable group number for "XX" when ordering:

GROUP	CABLE TYPES	GROUP	CABLE TYPES	GROUP	CABLE TYPES
02	RG178, RG196, M17/93, M17/169	05	RG178DS, RG196DS	19	RG174DS, RG316DS, M17/151, M17/152, Times RD-316
03	RG174, RG179, RG316, M17/113, M17/119, M17/172, M17/189	10	.085" semi-rigid, RG405, M17/133	21	.056" semi-rigid
		11	.047" semi-rigid, M17/151		

