

# NCP1611

## Enhanced, High-Efficiency Power Factor Controller

The NCP1611 is designed to drive PFC boost stages based on an innovative **C**urrent **C**ontrolled **F**requency **F**old-back (**CCFF**) method. In this mode, the circuit classically operates in **C**ritical conduction **M**ode (**CrM**) when the inductor current exceeds a programmable value. When the current is below this preset level, the NCP1611 linearly decays the frequency down to about 20 kHz when the current is null. **CCFF** maximizes the efficiency at both nominal and light load. In particular, the stand-by losses are reduced to a minimum.

Like in **FCCrM** controllers, internal circuitry allows near-unity power factor even when the switching frequency is reduced. Housed in a SO-8 package, the circuit also incorporates the features necessary for robust and compact PFC stages, with few external components.

### Features

- Near-Unity Power Factor
- Critical Conduction Mode (CrM)
- Current Controlled Frequency Fold-back (CCFF): Low Frequency Operation is Forced at Low Current Levels
- On-time Modulation to Maintain a Proper Current Shaping in CCFF Mode
- Skip Mode Near the Line Zero Crossing
- Fast Line / Load Transient Compensation (Dynamic Response Enhancer)
- Valley Turn on
- High Drive Capability: -500 mA / +800 mA
- $V_{CC}$  Range: from 9.5 V to 35 V
- Low Start-up Consumption
- A Version: Low  $V_{CC}$  Start-up Level (10.5 V), B Version: High  $V_{CC}$  Start-up level (17.0 V)
- Line Range Detection
- Configurable for Low Harmonic Content across Wide Line/Load Range
- EN61000-3-2 Class C Compliant across Wide Load Range for Dimmable Light Ballasts
- This is a Pb-Free Device

### Safety Features

- Non-latching, Over-Voltage Protection
- Brown-Out Detection
- Soft-Start for Smooth Start-up Operation (A version)
- Over Current Limitation
- Disable Protection if the Feedback Pin is Not Connected
- Thermal Shutdown

- Low Duty-Cycle Operation if the Bypass Diode is Shorted
- Open Ground Pin Fault Monitoring
- Saturated Inductor Protection
- Detailed Safety Testing Analysis (Refer to Application Note AND9064/D)


### Typical Applications

- PC, TV, Adapters Power Supplies
- LED Drivers and Light Ballasts (including dimmable versions)
- All Off-Line Applications Requiring Power Factor Correction



ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)

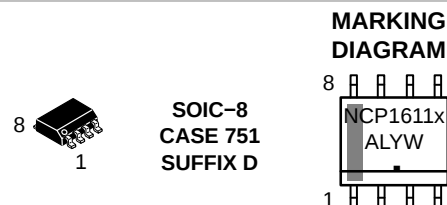

NCP1611x = Specific Device Code

x = A or B

A = Assembly Location


L = Wafer Lot

Y = Year

W = Work Week

▪ = Pb-Free Package

### PIN CONNECTIONS

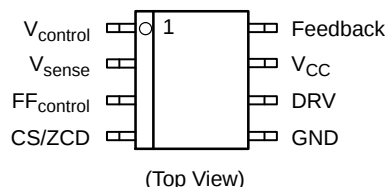

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 28 of this data sheet.

# NCP1611

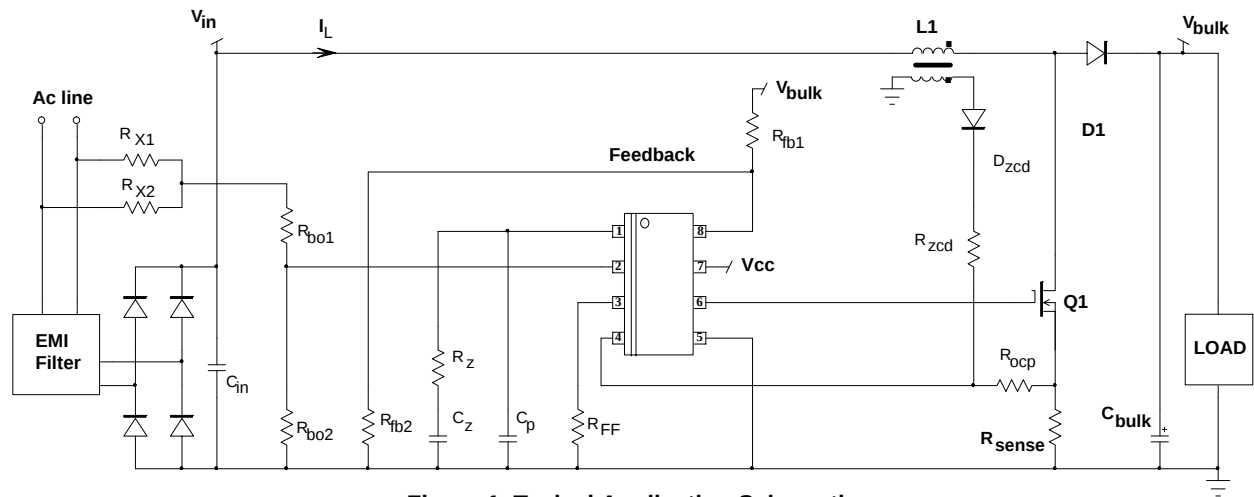


Figure 1. Typical Application Schematic


# NCP1611

**MAXIMUM RATINGS TABLE**

| Symbol                   | Pin | Rating                                                                                                                                      | Value                             | Unit                     |
|--------------------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|--------------------------|
| $V_{CC}$                 | 7   | Power Supply Input                                                                                                                          | -0.3, +35                         | V                        |
| $V_{CONTROL}$            | 1   | $V_{CONTROL}$ pin (Note 1)                                                                                                                  | -0.3, $V_{CONTROLMAX}$ (*)        | V                        |
| $V_{sense}$              | 2   | $V_{sense}$ pin (Note 5)                                                                                                                    | -0.3, +10                         | V                        |
| FFcontrol                | 3   | FFcontrol pin                                                                                                                               | -0.3, +10                         | V                        |
| CS/ZCD                   | 4   | Input Voltage<br>Current Injected to pin 4 (Note 4)                                                                                         | -0.3, +35<br>+5                   | V<br>mA                  |
| DRV                      | 6   | Driver Voltage (Note 1)<br>Driver Current                                                                                                   | -0.3, $V_{DRV}$ (*)<br>-500, +800 | V<br>mA                  |
| FB                       | 8   | Feedback pin                                                                                                                                | -0.3, +10                         | V                        |
| $P_D$<br>$R_{\theta JA}$ |     | Power Dissipation and Thermal Characteristics<br>Maximum Power Dissipation @ $T_A = 70^\circ\text{C}$<br>Thermal Resistance Junction to Air | 550<br>145                        | mW<br>$^\circ\text{C/W}$ |
| $T_J$                    |     | Operating Junction Temperature Range                                                                                                        | -40 to +125                       | $^\circ\text{C}$         |
| $T_{Jmax}$               |     | Maximum Junction Temperature                                                                                                                | 150                               | $^\circ\text{C}$         |
| $T_{Smax}$               |     | Storage Temperature Range                                                                                                                   | -65 to 150                        | $^\circ\text{C}$         |
| $T_{Lmax}$               |     | Lead Temperature (Soldering, 10s)                                                                                                           | 300                               | $^\circ\text{C}$         |
| ESD <sub>HBM</sub>       |     | ESD Capability, HBM model (Note 2)                                                                                                          | > 2000                            | V                        |
| ESD <sub>MM</sub>        |     | ESD Capability, Machine Model (Note 2)                                                                                                      | > 200                             | V                        |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. " $V_{CONTROLMAX}$ " is the pin1 clamp voltage and " $V_{DRV}$ " is the DRV clamp voltage ( $V_{DRVhigh}$ ). If  $V_{CC}$  is below  $V_{DRVhigh}$ , " $V_{DRV}$ " is  $V_{CC}$ .
2. This device(s) contains ESD protection and exceeds the following tests:  
Human Body Model 2000 V per JEDEC Standard JESD22-A114E  
Machine Model Method 200 V per JEDEC Standard JESD22-A115-A
3. This device contains latch-up protection and exceeds 100 mA per JEDEC Standard JESD78.
4. Maximum CS/ZCD current that can be injected into pin4

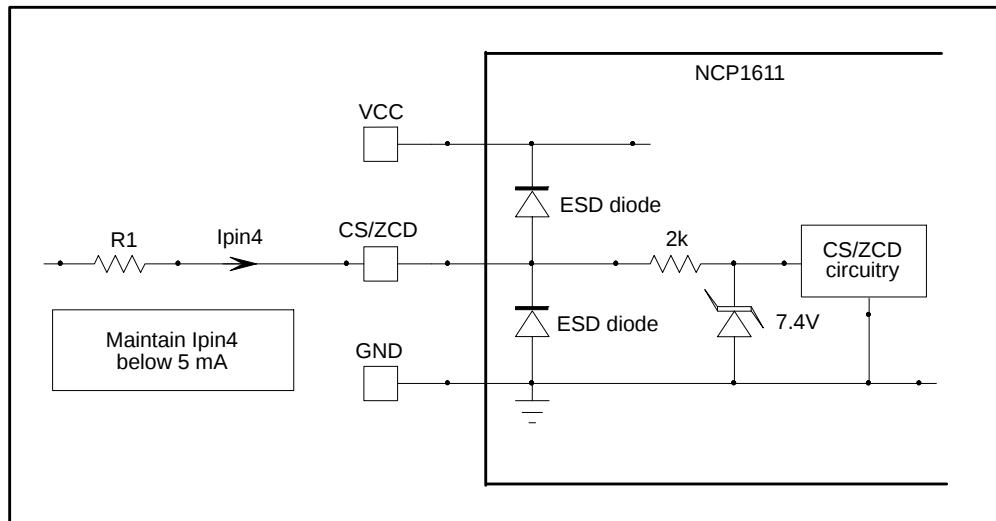

5. Recommended maximum  $V_{sense}$  voltage for optimal operation is 4.5 V.

# NCP1611

## TYPICAL ELECTRICAL CHARACTERISTICS (Conditions: $V_{CC} = 15\text{ V}$ , $T_J$ from $-40^\circ\text{C}$ to $+125^\circ\text{C}$ , unless otherwise specified)

| Symbol | Rating | Min | Typ | Max | Unit |
|--------|--------|-----|-----|-----|------|
|--------|--------|-----|-----|-----|------|

### START-UP AND SUPPLY CIRCUIT

|                 |                                                                       |               |                |                |               |
|-----------------|-----------------------------------------------------------------------|---------------|----------------|----------------|---------------|
| $V_{CC(on)}$    | Start-Up Threshold, $V_{CC}$ increasing:<br>A version<br>B version    | 9.75<br>15.80 | 10.50<br>17.00 | 11.25<br>18.20 | V             |
| $V_{CC(off)}$   | Minimum Operating Voltage, $V_{CC}$ falling                           | 8.50          | 9.00           | 9.50           | V             |
| $V_{CC(HYST)}$  | Hysteresis ( $V_{CC(on)} - V_{CC(off)}$ )<br>A version<br>B version   | 0.75<br>6.00  | 1.50<br>8.00   | –<br>–         | V             |
| $I_{CC(start)}$ | Start-Up Current, $V_{CC} = 9.4\text{ V}$                             | –             | 20             | 50             | $\mu\text{A}$ |
| $I_{CC(op)1}$   | Operating Consumption, no switching ( $V_{sense}$ pin being grounded) | –             | 0.5            | 1.0            | mA            |
| $I_{CC(op)2}$   | Operating Consumption, 50 kHz switching, no load on DRV pin           | –             | 2.0            | 3.0            | mA            |

### CURRENT CONTROLLED FREQUENCY FOLD-BACK

|                 |                                                                             |      |      |      |               |
|-----------------|-----------------------------------------------------------------------------|------|------|------|---------------|
| $T_{DT1}$       | Dead-Time, $V_{FFcontrol} = 2.60\text{ V}$ (Note 6)                         | –    | –    | 0    | $\mu\text{s}$ |
| $T_{DT2}$       | Dead-Time, $V_{FFcontrol} = 1.75\text{ V}$                                  | 14   | 18   | 22   | $\mu\text{s}$ |
| $T_{DT3}$       | Dead-Time, $V_{FFcontrol} = 1.00\text{ V}$                                  | 32   | 38   | 44   | $\mu\text{s}$ |
| $I_{DT1}$       | FFcontrol pin current, $V_{sense} = 1.4\text{ V}$ and $V_{control}$ maximum | 180  | 200  | 220  | $\mu\text{A}$ |
| $I_{DT2}$       | FFcontrol pin current, $V_{sense} = 2.8\text{ V}$ and $V_{control}$ maximum | 110  | 135  | 160  | $\mu\text{A}$ |
| $V_{SKIP-H}$    | FFcontrol pin Skip Level, $V_{FFcontrol}$ rising                            | –    | 0.75 | 0.85 | V             |
| $V_{SKIP-L}$    | FFcontrol pin Skip Level, $V_{FFcontrol}$ falling                           | 0.55 | 0.65 | –    | V             |
| $V_{SKIP-HYST}$ | FFcontrol pin Skip Hysteresis                                               | 50   | –    | –    | mV            |

### GATE DRIVE

|               |                                                                                             |     |     |    |          |
|---------------|---------------------------------------------------------------------------------------------|-----|-----|----|----------|
| $T_R$         | Output voltage rise-time @ $C_L = 1\text{ nF}$ , 10–90% of output signal                    | –   | 30  | –  | ns       |
| $T_F$         | Output voltage fall-time @ $C_L = 1\text{ nF}$ , 10–90% of output signal                    | –   | 20  | –  | ns       |
| $R_{OH}$      | Source resistance                                                                           | –   | 10  | –  | $\Omega$ |
| $R_{OL}$      | Sink resistance                                                                             | –   | 7.0 | –  | $\Omega$ |
| $I_{SOURCE}$  | Peak source current, $V_{DRV} = 0\text{ V}$ (guaranteed by design)                          | –   | 500 | –  | mA       |
| $I_{SINK}$    | Peak sink current, $V_{DRV} = 12\text{ V}$ (guaranteed by design)                           | –   | 800 | –  | mA       |
| $V_{DRVlow}$  | DRV pin level at $V_{CC}$ close to $V_{CC(off)}$ with a 10 k $\Omega$ resistor to GND       | 8.0 | –   | –  | V        |
| $V_{DRVhigh}$ | DRV pin level at $V_{CC} = 35\text{ V}$ ( $R_L = 33\text{ k}\Omega$ , $C_L = 1\text{ nF}$ ) | 10  | 12  | 14 | V        |

### REGULATION BLOCK

|                                                         |                                                                                                            |              |              |              |               |
|---------------------------------------------------------|------------------------------------------------------------------------------------------------------------|--------------|--------------|--------------|---------------|
| $V_{REF}$                                               | Feedback Voltage Reference:<br>from $0^\circ\text{C}$ to $125^\circ\text{C}$<br>Over the temperature range | 2.44<br>2.42 | 2.50<br>2.50 | 2.54<br>2.54 | V             |
| $I_{EA}$                                                | Error Amplifier Current Capability                                                                         | –            | $\pm 20$     | –            | $\mu\text{A}$ |
| $G_{EA}$                                                | Error Amplifier Gain                                                                                       | 110          | 220          | 290          | $\mu\text{S}$ |
| $V_{CONTROL}$<br>$-V_{CONTROLMAX}$<br>$-V_{CONTROLMIN}$ | $V_{control}$ Pin Voltage<br>– @ $V_{FB} = 2\text{ V}$<br>– @ $V_{FB} = 3\text{ V}$                        | –<br>–       | 4.5<br>0.5   | –<br>–       | V             |
| $V_{OUTL} / V_{REF}$                                    | Ratio ( $V_{OUT}$ Low Detect Threshold / $V_{REF}$ ) (guaranteed by design)                                | 95.0         | 95.5         | 96.0         | %             |
| $H_{OUTL} / V_{REF}$                                    | Ratio ( $V_{OUT}$ Low Detect Hysteresis / $V_{REF}$ ) (guaranteed by design)                               | –            | –            | 0.5          | %             |
| $I_{BOOST}$                                             | $V_{control}$ Pin Source Current when ( $V_{OUT}$ Low Detect) is activated                                 | 180          | 220          | 250          | $\mu\text{A}$ |

### CURRENT SENSE AND ZERO CURRENT DETECTION BLOCKS

|              |                                 |     |     |     |    |
|--------------|---------------------------------|-----|-----|-----|----|
| $V_{CS(th)}$ | Current Sense Voltage Reference | 450 | 500 | 550 | mV |
|--------------|---------------------------------|-----|-----|-----|----|

6. There is actually a minimum dead-time that is the delay between the core reset detection and the DRV turning on ( $T_{ZD}$  parameter of the “Current Sense and Zero Current Detection Blocks” section).

# NCP1611

**TYPICAL ELECTRICAL CHARACTERISTICS** (Conditions:  $V_{CC} = 15\text{ V}$ ,  $T_J$  from  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$ , unless otherwise specified)

| Symbol | Rating | Min | Typ | Max | Unit |
|--------|--------|-----|-----|-----|------|
|--------|--------|-----|-----|-----|------|

## CURRENT SENSE AND ZERO CURRENT DETECTION BLOCKS

|                 |                                                                                                                          |     |      |      |               |
|-----------------|--------------------------------------------------------------------------------------------------------------------------|-----|------|------|---------------|
| $T_{LEB, OCP}$  | Over-Current Protection Leading Edge Blanking Time (guaranteed by design)                                                | 100 | 200  | 350  | ns            |
| $T_{LEB, OVS}$  | “Overstress” Leading Edge Blanking Time (guaranteed by design)                                                           | 50  | 100  | 170  | ns            |
| $T_{OCP}$       | Over-Current Protection Delay from $V_{CS/ZCD} > V_{CS(th)}$ to DRV low ( $dV_{CS/ZCD} / dt = 10\text{ V}/\mu\text{s}$ ) | –   | 40   | 200  | ns            |
| $V_{ZCD(th)H}$  | Zero Current Detection, $V_{CS/ZCD}$ rising                                                                              | 675 | 750  | 825  | mV            |
| $V_{ZCD(th)L}$  | Zero Current Detection, $V_{CS/ZCD}$ falling                                                                             | 200 | 250  | 300  | mV            |
| $V_{ZCD(hyst)}$ | Hysteresis of the Zero Current Detection Comparator                                                                      | 375 | 500  | –    | mV            |
| $R_{ZCD/CS}$    | $V_{ZCD(th)H}$ over $V_{CS(th)}$ Ratio                                                                                   | 1.4 | 1.5  | 1.6  | –             |
| $V_{CL(pos)}$   | CS/ZCD Positive Clamp @ $I_{CS/ZCD} = 5\text{ mA}$                                                                       | –   | 15.6 | –    | V             |
| $I_{ZCD(bias)}$ | CS/ZCD Pin Bias Current, $V_{CS/ZCD} = 0.75\text{ V}$                                                                    | 0.5 | –    | 2.0  | $\mu\text{A}$ |
| $I_{ZCD(bias)}$ | CS/ZCD Pin Bias Current, $V_{CS/ZCD} = 0.25\text{ V}$                                                                    | 0.5 | –    | 2.0  | $\mu\text{A}$ |
| $T_{ZCD}$       | ( $V_{CS/ZCD} < V_{ZCD(th)L}$ ) to (DRV high)                                                                            | –   | 60   | 200  | ns            |
| $T_{SYNC}$      | Minimum ZCD Pulse Width                                                                                                  | –   | 110  | 200  | ns            |
| $T_{WDG}$       | Watch Dog Timer                                                                                                          | 80  | 200  | 320  | $\mu\text{s}$ |
| $T_{WDG(OS)}$   | Watch Dog Timer in “OverStress” Situation                                                                                | 400 | 800  | 1200 | $\mu\text{s}$ |
| $T_{TMO}$       | Time-Out Timer                                                                                                           | 20  | 30   | 50   | $\mu\text{s}$ |
| $I_{ZCD(gnd)}$  | Source Current for CS/ZCD pin impedance Testing                                                                          | –   | 250  | –    | $\mu\text{A}$ |

## STATIC OVP

|           |                                                            |   |   |   |   |
|-----------|------------------------------------------------------------|---|---|---|---|
| $D_{MIN}$ | Duty Cycle, $V_{FB} = 3\text{ V}$ , $V_{control}$ Pin Open | – | – | 0 | % |
|-----------|------------------------------------------------------------|---|---|---|---|

## ON-TIME CONTROL

|                   |                                                                                          |      |      |      |               |
|-------------------|------------------------------------------------------------------------------------------|------|------|------|---------------|
| $T_{ON(LL)}$      | Maximum On Time, $V_{sense} = 1.4\text{ V}$ and $V_{control}$ maximum (CrM)              | 22   | 25   | 29   | $\mu\text{s}$ |
| $T_{ON(LL)2}$     | On Time, $V_{sense} = 1.4\text{ V}$ and $V_{control} = 2.5\text{ V}$ (CrM)               | 10.5 | 12.5 | 14.0 | $\mu\text{s}$ |
| $T_{ON(HL)}$      | Maximum On Time, $V_{sense} = 2.8\text{ V}$ and $V_{control}$ maximum (CrM)              | 7.3  | 8.5  | 9.6  | $\mu\text{s}$ |
| $T_{ON(LL)(MIN)}$ | Minimum On Time, $V_{sense} = 1.4\text{ V}$ (not tested, guaranteed by characterization) | –    | –    | 200  | ns            |
| $T_{ON(HL)(MIN)}$ | Minimum On Time, $V_{sense} = 2.8\text{ V}$ (not tested, guaranteed by characterization) | –    | –    | 100  | ns            |

## FEED-BACK OVER AND UNDER-VOLTAGE PROTECTIONS (OVP AND UVP)

|                     |                                                                                                             |     |     |     |    |
|---------------------|-------------------------------------------------------------------------------------------------------------|-----|-----|-----|----|
| $R_{softOVP}$       | Ratio (Soft OVP Threshold, $V_{FB}$ rising) over $V_{REF}$ ( $V_{softOVP}/V_{REF}$ ) (guaranteed by design) | 104 | 105 | 106 | %  |
| $R_{softOVP(HYST)}$ | Ratio (Soft OVP Hysteresis) over $V_{REF}$ (guaranteed by design)                                           | 1.5 | 2.0 | 2.5 | %  |
| $R_{fastOVP2}$      | Ratio (Fast OVP Threshold, $V_{FB}$ rising) over $V_{REF}$ ( $V_{fastOVP}/V_{REF}$ ) (guaranteed by design) | 106 | 107 | 108 | %  |
| $R_{UVP}$           | Ratio (UVP Threshold, $V_{FB}$ rising) over $V_{REF}$ ( $V_{UVP}/V_{REF}$ ) (guaranteed by design)          | 8   | 12  | 16  | %  |
| $R_{UVP(HYST)}$     | Ratio (UVP Hysteresis) over $V_{REF}$ (guaranteed by design)                                                | –   | –   | 1   | %  |
| $(I_B)_{FB}$        | FB Pin Bias Current @ $V_{FB} = V_{OVP}$ and $V_{FB} = V_{UVP}$                                             | 50  | 200 | 450 | nA |

## BROWN-OUT PROTECTION AND FEED-FORWARD

|                   |                                                       |      |      |      |               |
|-------------------|-------------------------------------------------------|------|------|------|---------------|
| $V_{BOH}$         | Brown-Out Threshold, $V_{sense}$ rising               | 0.96 | 1.00 | 1.04 | V             |
| $V_{BOL}$         | Brown-Out Threshold, $V_{sense}$ falling              | 0.86 | 0.90 | 0.94 | V             |
| $V_{BO(HYST)}$    | Brown-Out Comparator Hysteresis                       | 60   | 100  | –    | mV            |
| $T_{BO(blank)}$   | Brown-Out Blanking Time                               | 35   | 50   | 65   | ms            |
| $I_{CONTROL(BO)}$ | $V_{control}$ Pin Sink Current, $V_{sense} < V_{BOL}$ | 40   | 50   | 60   | $\mu\text{A}$ |

6. There is actually a minimum dead-time that is the delay between the core reset detection and the DRV turning on ( $T_{ZD}$  parameter of the “Current Sense and Zero Current Detection Blocks” section).

# NCP1611

## TYPICAL ELECTRICAL CHARACTERISTICS (Conditions: $V_{CC} = 15\text{ V}$ , $T_J$ from $-40^\circ\text{C}$ to $+125^\circ\text{C}$ , unless otherwise specified)

| Symbol | Rating | Min | Typ | Max | Unit |
|--------|--------|-----|-----|-----|------|
|--------|--------|-----|-----|-----|------|

### BROWN-OUT PROTECTION AND FEED-FORWARD

|                 |                                                                    |      |     |     |    |
|-----------------|--------------------------------------------------------------------|------|-----|-----|----|
| $V_{HL}$        | Comparator Threshold for Line Range Detection, $V_{sense}$ rising  | 2.1  | 2.2 | 2.3 | V  |
| $V_{LL}$        | Comparator Threshold for Line Range Detection, $V_{sense}$ falling | 1.6  | 1.7 | 1.8 | V  |
| $V_{HL(hyst)}$  | Comparator Hysteresis for Line Range Detection                     | 400  | 500 | 600 | mV |
| $T_{HL(blank)}$ | Blanking Time for Line Range Detection                             | 15   | 25  | 35  | ms |
| $I_{BO(bias)}$  | Brown-Out Pin Bias Current, $V_{sense} = V_{BOH}$                  | -250 | -   | 250 | nA |

### THERMAL SHUTDOWN

|             |                             |   |     |   |                  |
|-------------|-----------------------------|---|-----|---|------------------|
| $T_{LIMIT}$ | Thermal Shutdown Threshold  | - | 150 | - | $^\circ\text{C}$ |
| $H_{TEMP}$  | Thermal Shutdown Hysteresis | - | 50  | - | $^\circ\text{C}$ |


6. There is actually a minimum dead-time that is the delay between the core reset detection and the DRV turning on ( $T_{ZD}$  parameter of the "Current Sense and Zero Current Detection Blocks" section).

# NCP1611

## DETAILED PIN DESCRIPTION

| Pin Number | Name                  | Function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1          | V <sub>CONTROL</sub>  | The error amplifier output is available on this pin. The network connected between this pin and ground adjusts the regulation loop bandwidth that is typically set below 20 Hz to achieve high Power Factor ratios.<br>Pin1 is grounded when the circuit is off so that when it starts operation, the power increases slowly to provide a soft-start function.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 2          | V <sub>SENSE</sub>    | A portion of the instantaneous input voltage is to be applied to pin 2 in order to detect brown-out conditions. If V <sub>pin2</sub> is lower than 0.9 V for more than 50 ms, the circuit stops pulsing until the pin voltage rises again and exceeds 1.0 V.<br>This pin also detects the line range. By default, the circuit operates the "low-line gain" mode. If V <sub>pin2</sub> exceeds 2.2 V, the circuit detects a high-line condition and reduces the loop gain by 3. Conversely, if the pin voltage remains lower than 1.7 V for more than 25 ms, the low-line gain is set.<br>Connecting the pin 2 to ground disables the part once the 50 ms blanking time has elapsed.                                                                                                                                                                                                                                                                 |
| 3          | FF <sub>CONTROL</sub> | This pin sources a current representative to the line current. Connect a resistor between pin3 and ground to generate a voltage representative of the line current. When this voltage exceeds the internal 2.5 V reference (V <sub>REF</sub> ), the circuit operates in critical conduction mode. If the pin voltage is below 2.5 V, a dead-time is generated that approximately equates $[66 \mu s \times (1 - (V_{pin3}/V_{REF}))]$ . By this means, the circuit forces a longer dead-time when the current is small and a shorter one as the current increases.<br>The circuit skips cycles whenever V <sub>pin3</sub> is below 0.65 V to prevent the PFC stage from operating near the line zero crossing where the power transfer is particularly inefficient. This does result in a slightly increased distortion of the current. If superior power factor is required, offset pin 3 by more than 0.75 V offset to inhibit the skip function. |
| 4          | CS / ZCD              | This pin monitors the MOSFET current to limit its maximum current.<br>This pin is also connected to an internal comparator for Zero Current Detection (ZCD). This comparator is designed to monitor a signal from an auxiliary winding and to detect the core reset when this voltage drops to zero. The auxiliary winding voltage is to be applied through a diode to avoid altering the current sense information for the on-time (see application schematic).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 5          | Ground                | Connect this pin to the PFC stage ground.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 6          | Drive                 | The high-current capability of the totem pole gate drive (–0.5/+0.8 A) makes it suitable to effectively drive high gate charge power MOSFETs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 7          | V <sub>CC</sub>       | This pin is the positive supply of the IC. The circuit starts to operate when V <sub>CC</sub> exceeds 10.5 V (A version, 17.0 V for the B version) and turns off when V <sub>CC</sub> goes below 9.0 V (typical values). After start-up, the operating range is 9.5 V up to 35 V. The A version is preferred in applications where the circuit is fed by an external power source (from an auxiliary power supply or from a downstream converter). Its maximum start-up level (11.25 V) is set low enough so that the circuit can be powered from a 12 V rail. The B version is optimized for applications where the PFC stage is self-powered.                                                                                                                                                                                                                                                                                                     |
| 8          | Feedback              | This pin receives a portion of the PFC output voltage for the regulation and the Dynamic Response Enhancer (DRE) that drastically speeds-up the loop response when the output voltage drops below 95.5% of the desired output level.<br>V <sub>pin8</sub> is also the input signal for the (non-latching) Over-Voltage (OVP) and Under-Voltage (UVP) comparators. The UVP comparator prevents operation as long as V <sub>pin8</sub> is lower than 12% of the reference voltage (V <sub>REF</sub> ). A soft OVP comparator gradually reduces the duty-ratio when V <sub>pin8</sub> exceeds 105% of V <sub>REF</sub> . If despite of this, the output voltage still increases, the driver is immediately disabled if the output voltage exceeds 107% of the desired level (fast OVP).<br>A 250 nA sink current is built-in to trigger the UVP protection and disable the part if the feedback pin is accidentally open.                              |

# NCP1611

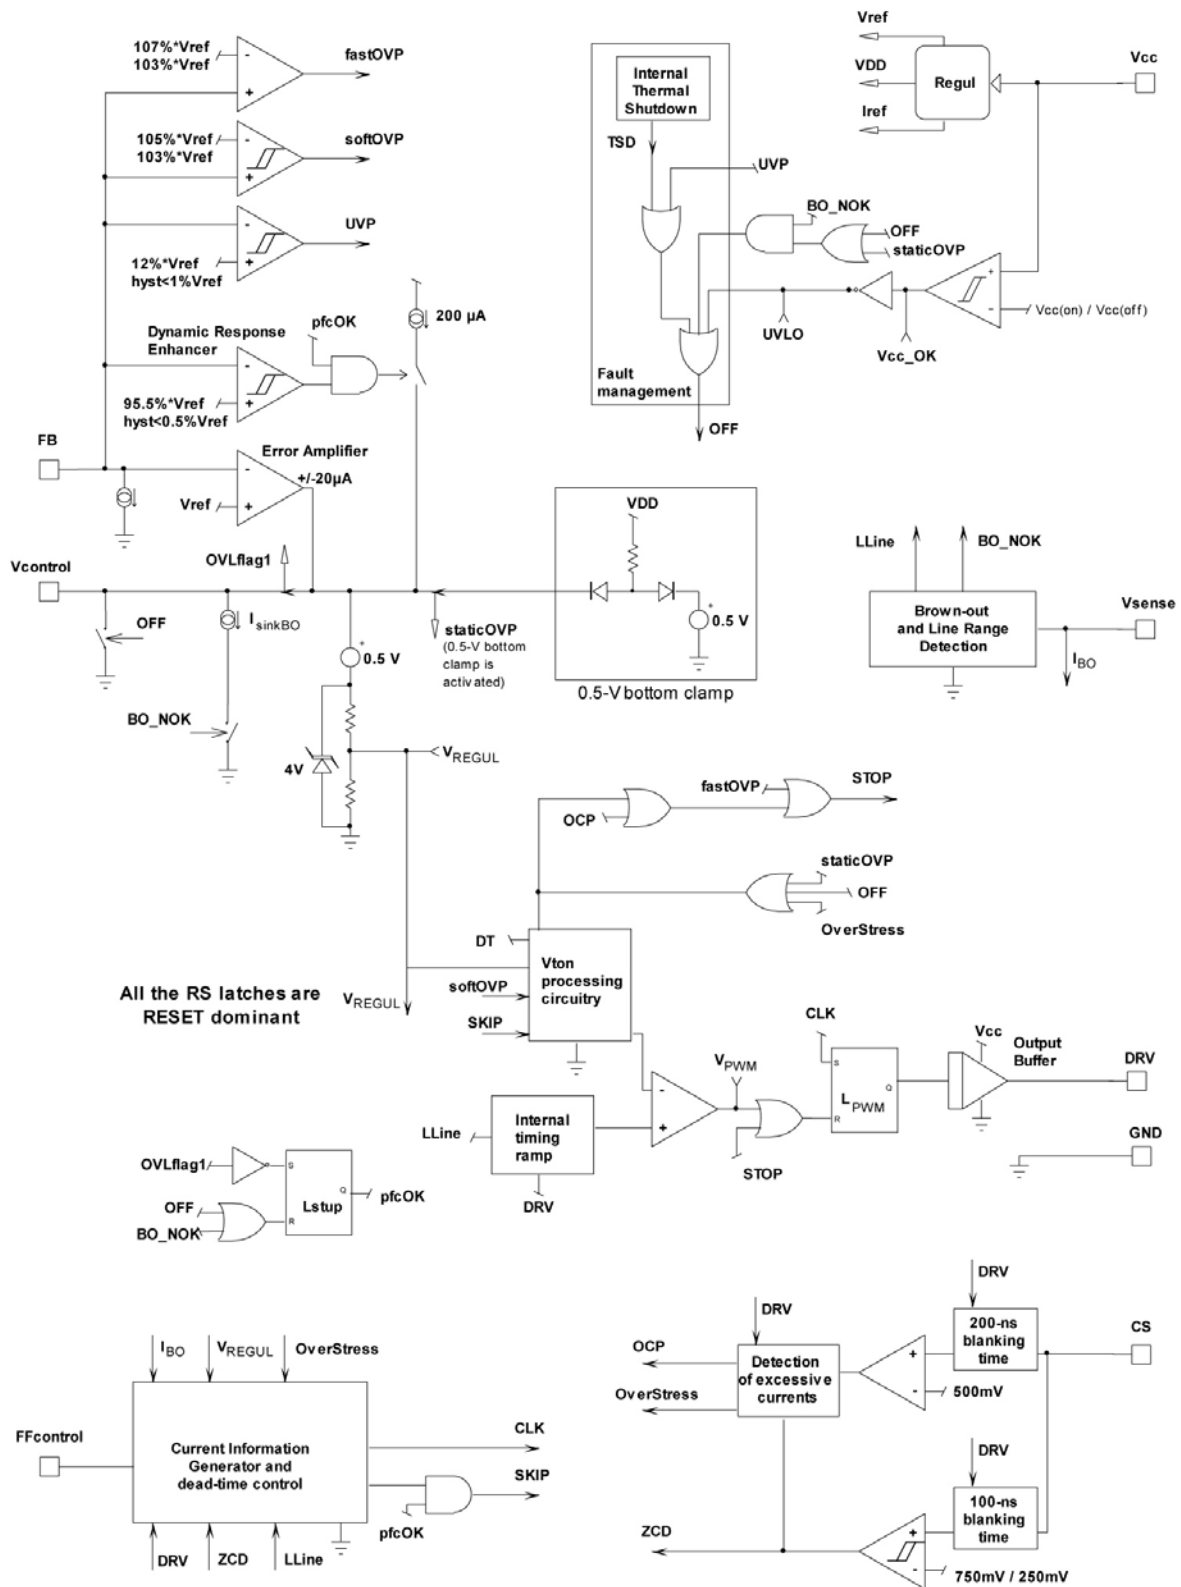

TYPICAL CHARACTERISTICS

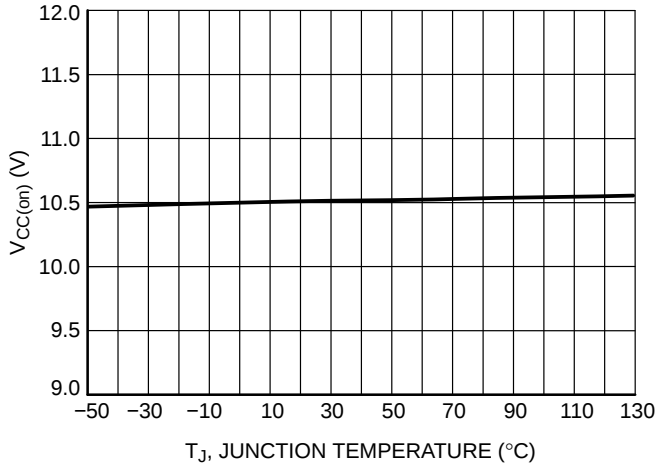


Figure 3. Start-Up Threshold,  $V_{CC}$  Increasing ( $V_{CC(on)}$ ) vs. Temperature (A Version)

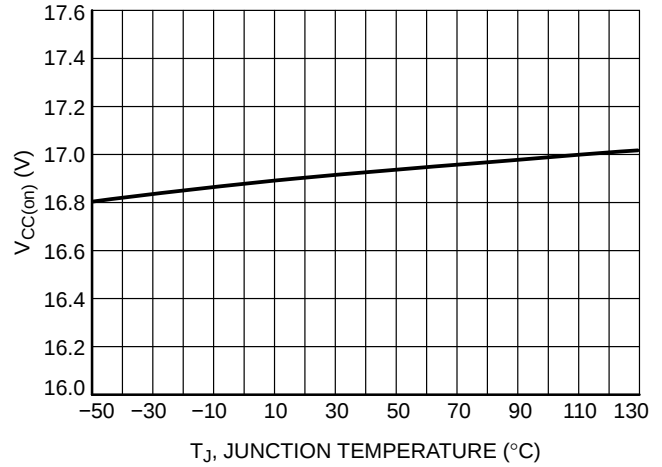


Figure 4. Start-Up Threshold,  $V_{CC}$  Increasing ( $V_{CC(on)}$ ) vs. Temperature (B Version)

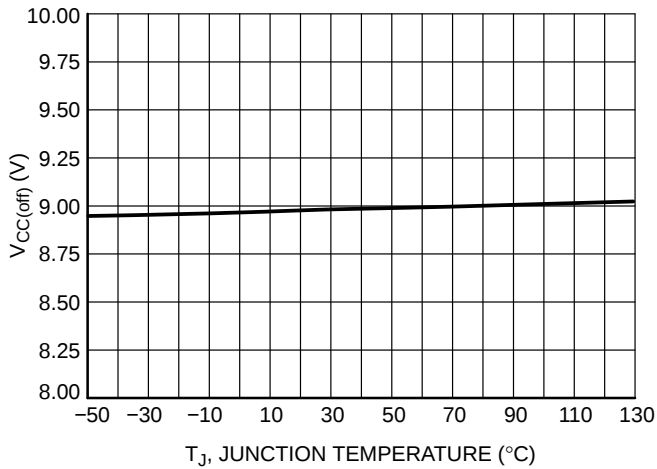


Figure 5.  $V_{CC}$  Minimum Operating Voltage,  $V_{CC}$  Falling ( $V_{CC(off)}$ ) vs. Temperature

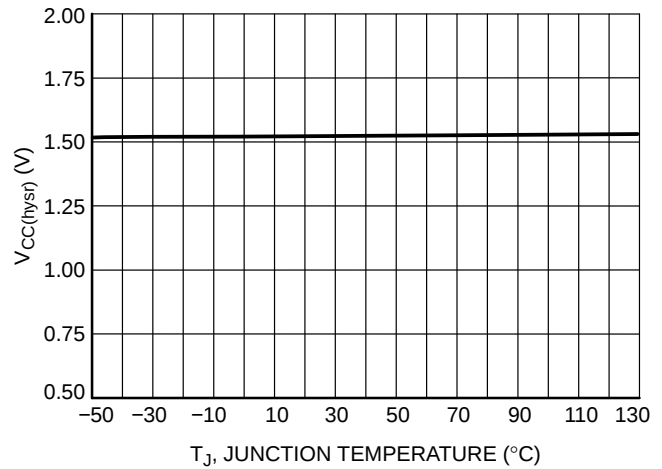


Figure 6. Hysteresis ( $V_{CC(on)} - V_{CC(off)}$ ) vs. Temperature (A Version)

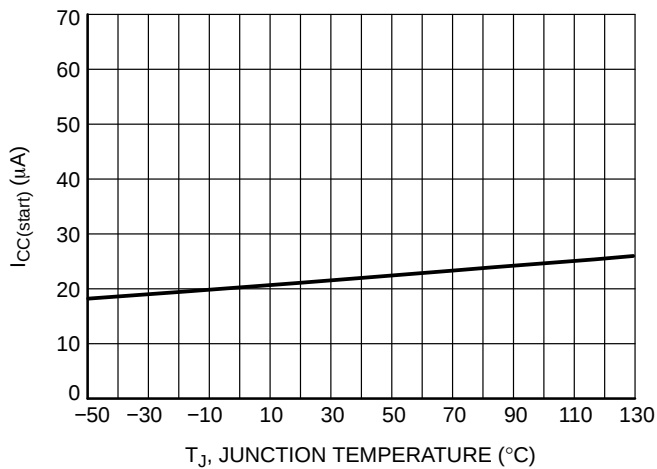


Figure 7. Start-Up Current @  $V_{CC} = 9.4$  V vs. Temperature



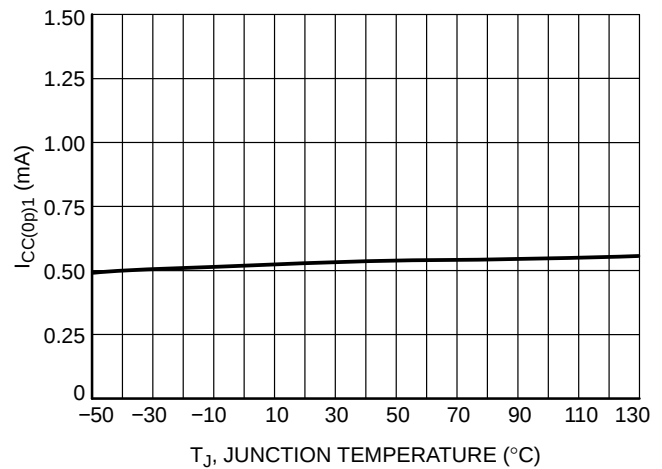


Figure 8. Operating Current, No Switching ( $V_{SENSE}$  Grounded) vs. Temperature


## TYPICAL CHARACTERISTICS

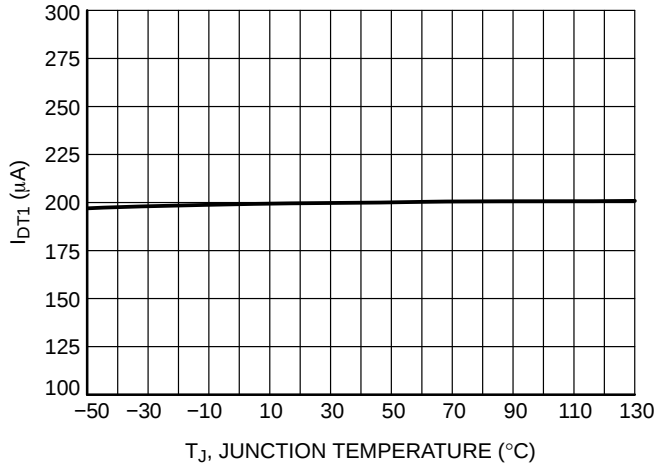


**Figure 9. FFcontrol Pin Current,  $V_{SENSE} = 1.4$  V and  $V_{CONTROL}$  Maximum vs. Temperature**

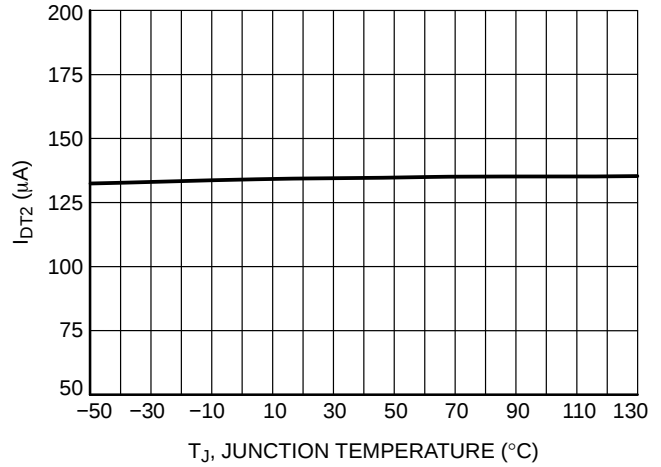


**Figure 10. FFcontrol Pin Current,  $V_{SENSE} = 2.8$  V and  $V_{CONTROL}$  Maximum vs. Temperature**

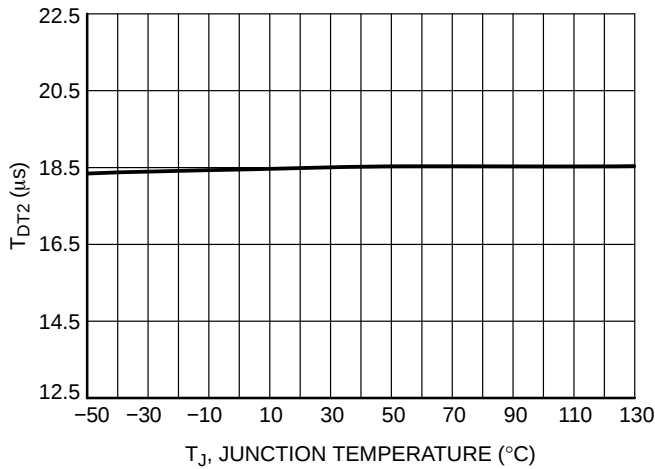


**Figure 11. Dead-Time,  $V_{FFcontrol} = 1.75$  V vs. Temperature**

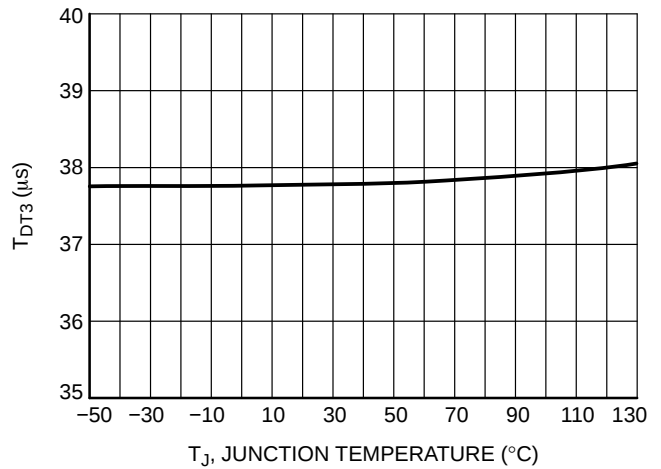

**Figure 12. Dead-Time,  $V_{FFcontrol} = 1.00$  V vs. Temperature**

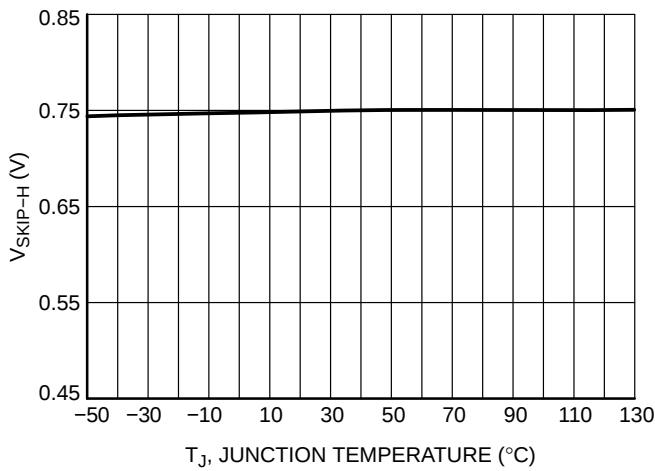

**Figure 13. FFcontrol Pin Skip Level ( $V_{FFcontrol}$  Rising) vs. Temperature**

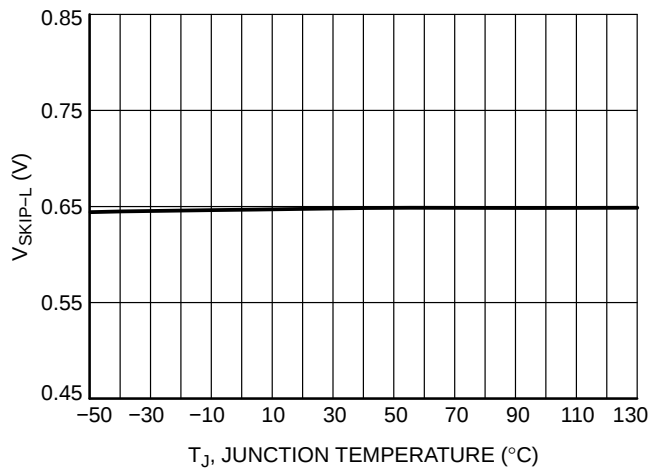

**Figure 14. FFcontrol Pin Skip Level ( $V_{FFcontrol}$  Falling) vs. Temperature**

TYPICAL CHARACTERISTICS

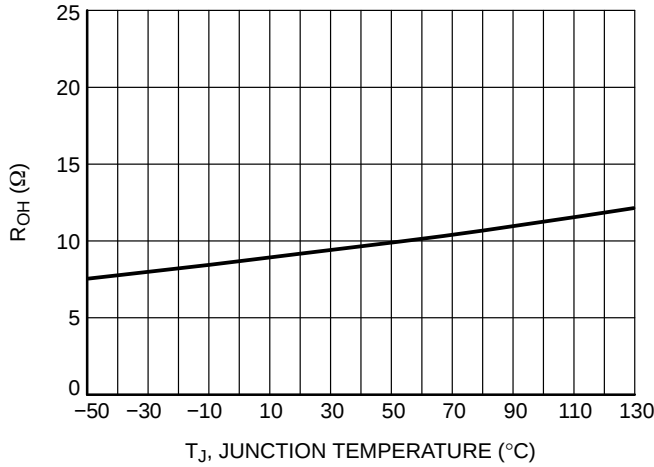


Figure 15. DRV Source Resistance vs. Temperature

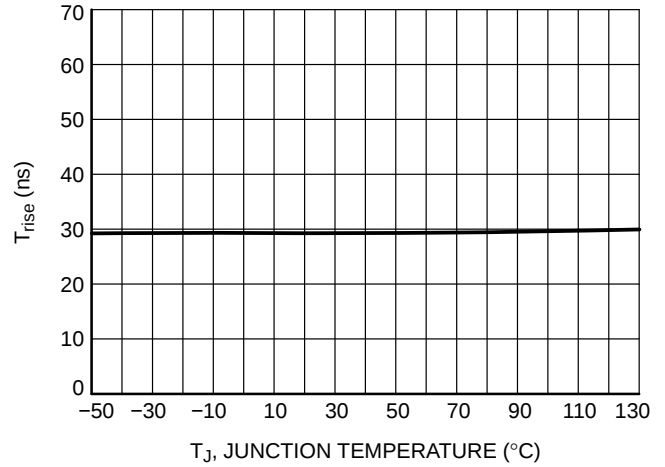


Figure 16. DRV Voltage Rise-Time ( $C_L = 1$  nF, 10–90% of Output Signal) vs. Temperature

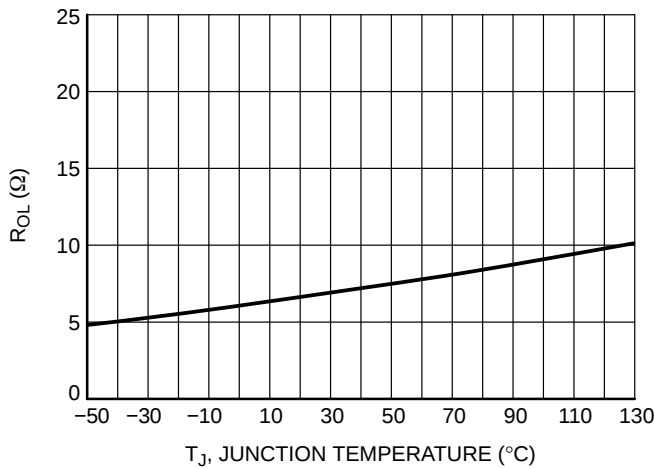


Figure 17. DRV Sink Resistance vs. Temperature

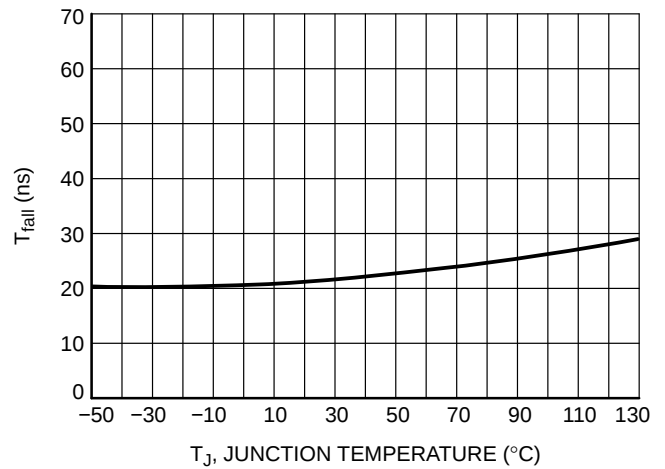


Figure 18. DRV Voltage Fall-Time ( $C_L = 1$  nF, 10–90% of Output Signal) vs. Temperature

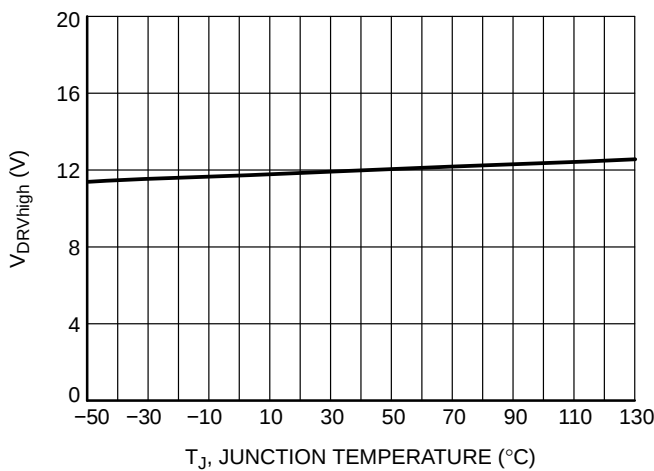


Figure 19. DRV Pin Level @  $V_{CC} = 35$  V ( $R_L = 33$  kΩ,  $C_L = 1$  nF) vs. Temperature

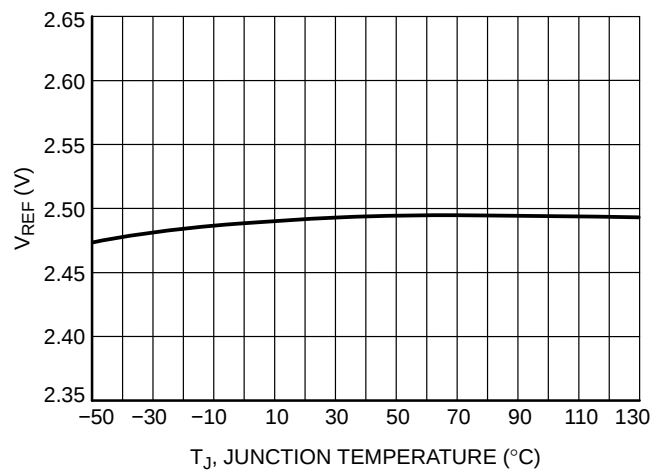


Figure 20. Feedback Reference Voltage vs. Temperature

TYPICAL CHARACTERISTICS

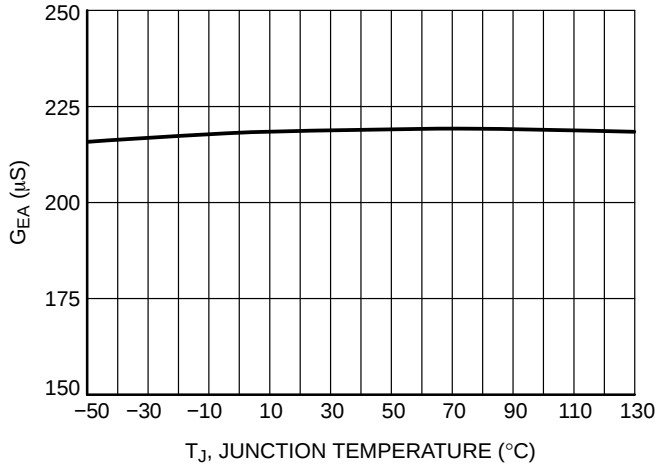


Figure 21. Error Amplifier Transconductance Gain vs. Temperature

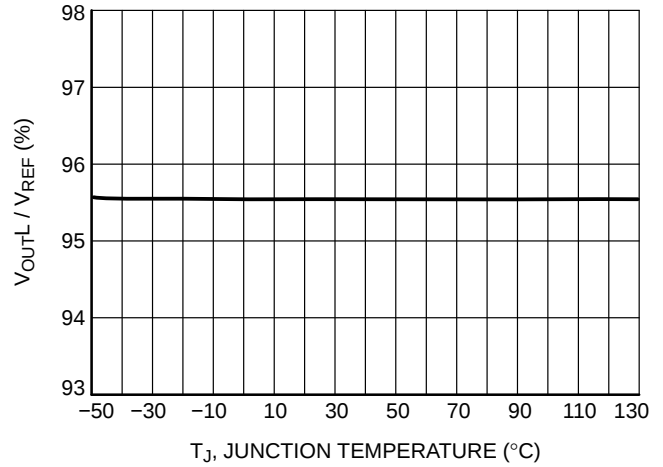


Figure 22. Ratio (V<sub>OUT</sub> Low Detect Threshold / V<sub>REF</sub>) vs. Temperature

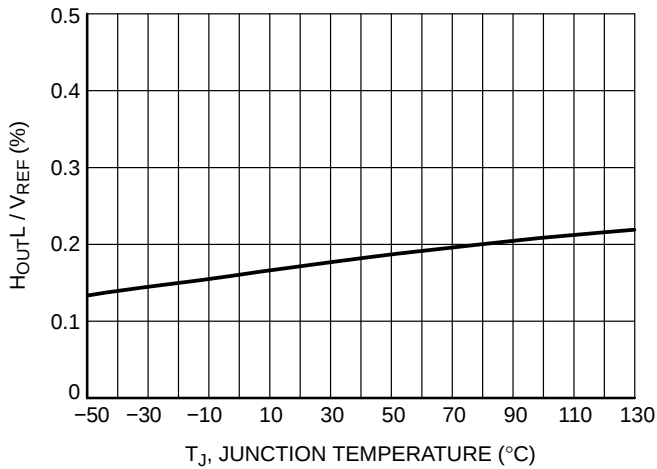


Figure 23. Ratio (V<sub>OUT</sub> Low Detect Hysteresis / V<sub>REF</sub>) vs. Temperature

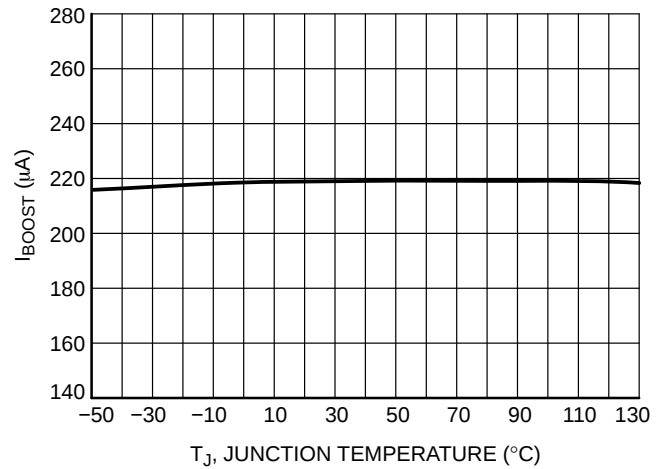


Figure 24. V<sub>CONTROL</sub> Source Current when (V<sub>OUT</sub> Low Detect) is Activated for Dynamic Response Enhancer (DRE) vs. Temperature

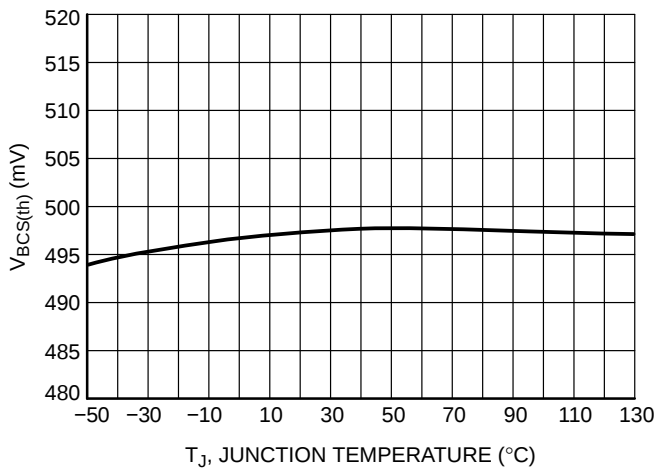


Figure 25. Current Sense Voltage Threshold vs. Temperature

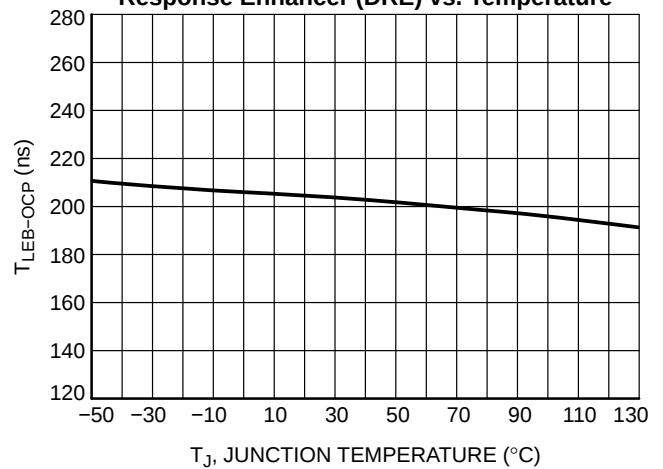


Figure 26. Over-Current Protection Leading Edge Blanking vs. Temperature

TYPICAL CHARACTERISTICS

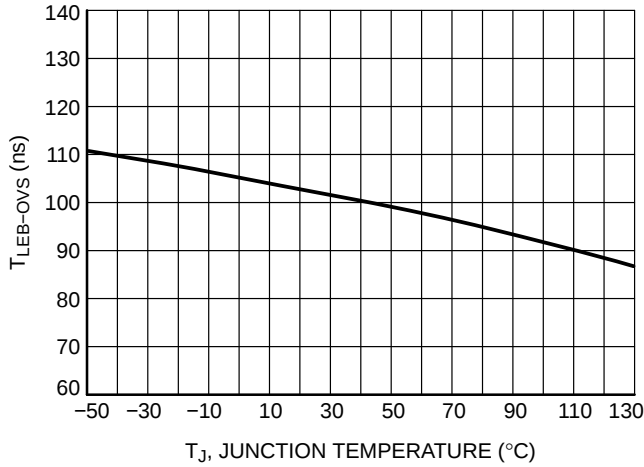


Figure 27. "Overstress" Protection Leading Edge Blanking vs. Temperature

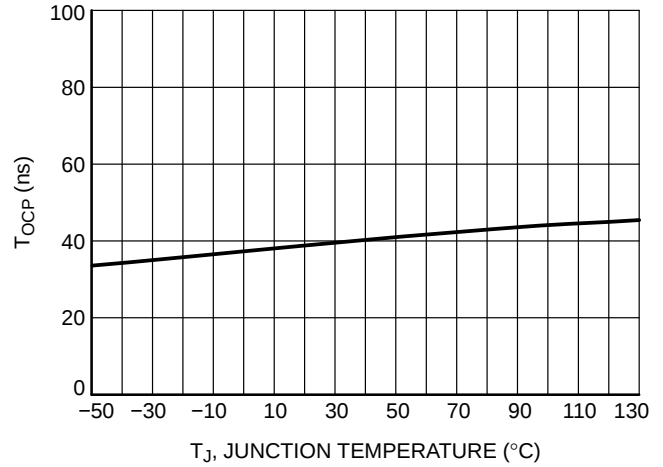


Figure 28. Over-Current Protection Delay from  $V_{CS/ZCD} > V_{CS(th)}$  to DRV Low ( $dV_{CS/ZCD} / dt = 10 \text{ V}/\mu\text{s}$ ) vs. Temperature

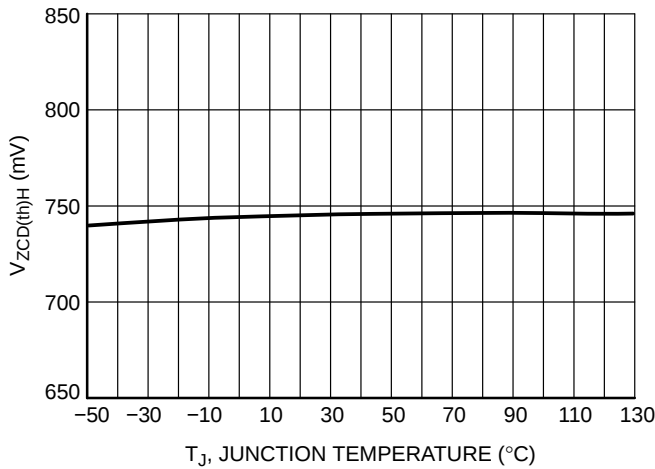


Figure 29. Zero Current Detection,  $V_{CS/ZCD}$  Rising vs. Temperature

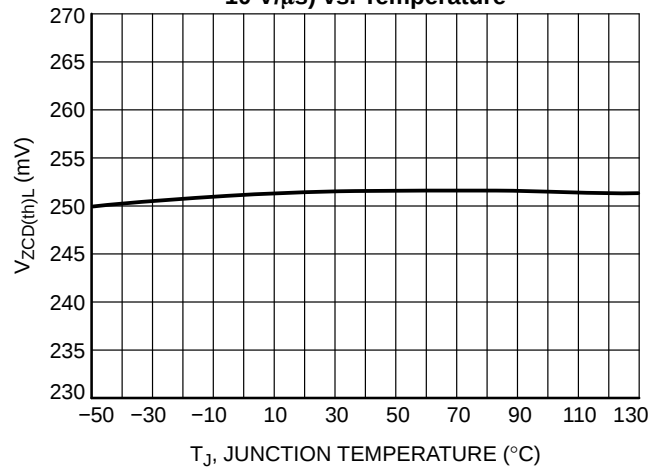


Figure 30. Zero Current Detection,  $V_{CS/ZCD}$  Falling vs. Temperature

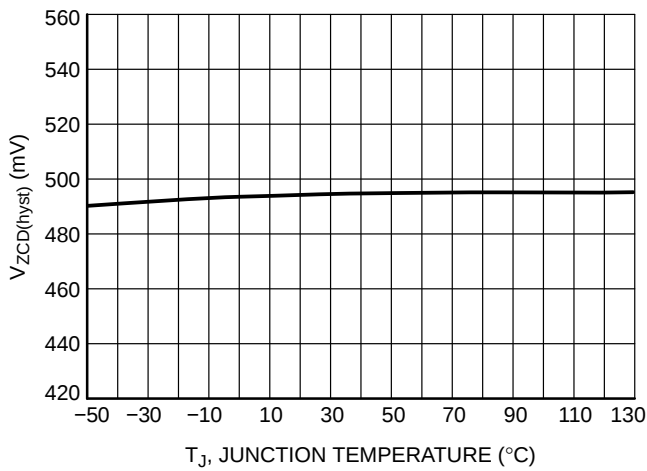


Figure 31. Hysteresis of the Zero Current Detection Comparator vs. Temperature

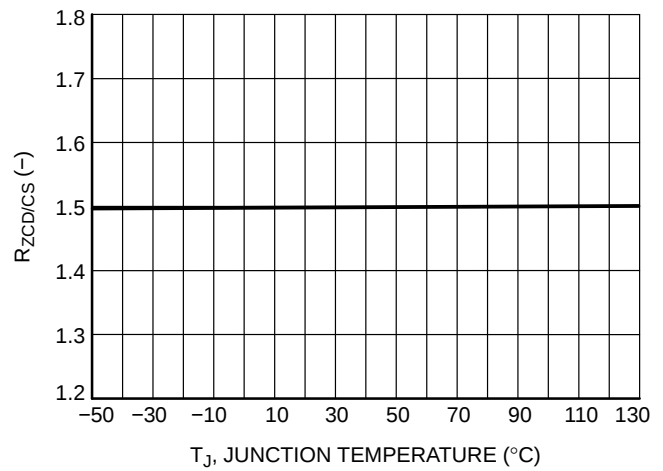


Figure 32.  $V_{ZCD(th)}$  over  $V_{CS(th)}$  Ratio vs. Temperature

TYPICAL CHARACTERISTICS

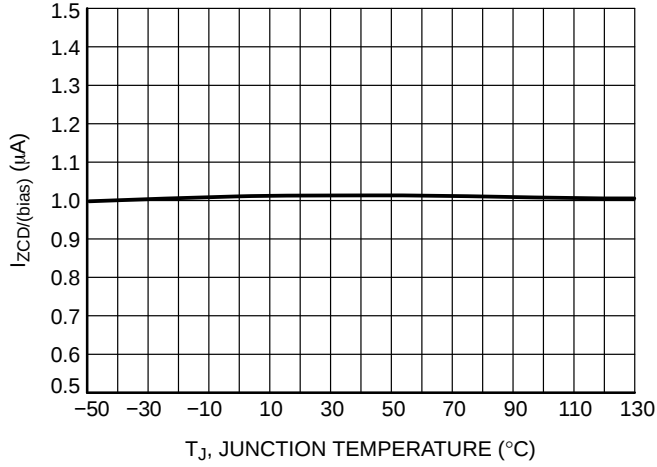


Figure 33. CS/ZCD Pin Bias Current @  $V_{CS/ZCD} = 0.75$  V vs. Temperature

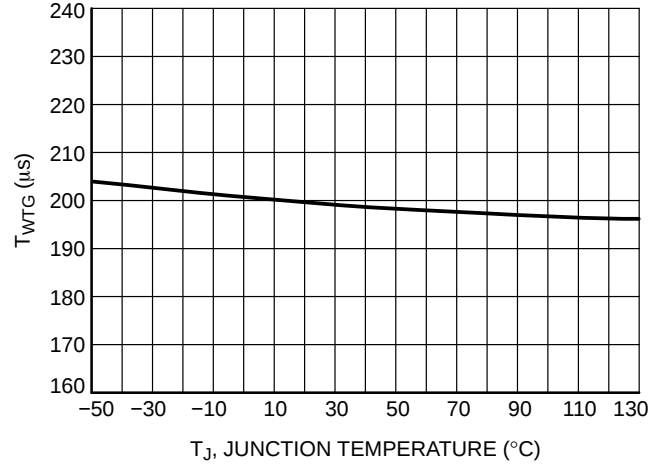


Figure 34. Watchdog Timer vs. Temperature

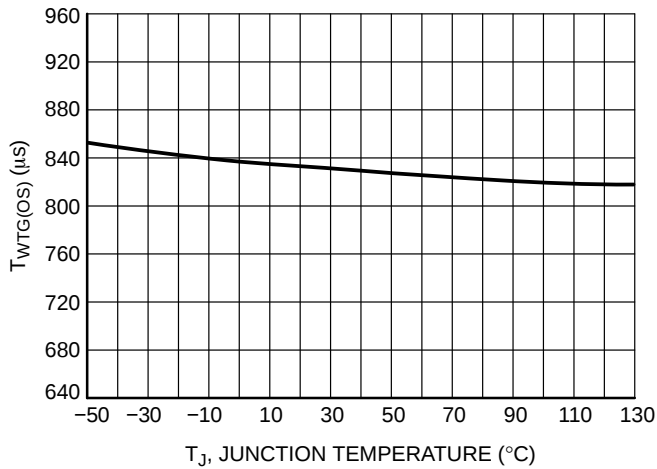


Figure 35. Watchdog Timer in "Overstress" Situation vs. Temperature

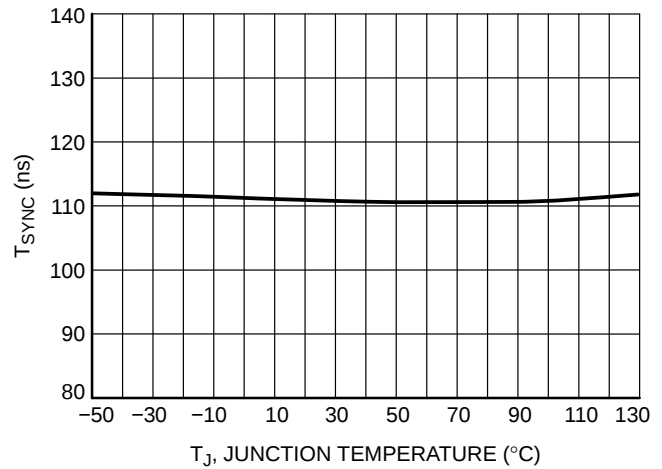


Figure 36. Minimum ZCD Pulse Width for ZCD Detection vs. Temperature

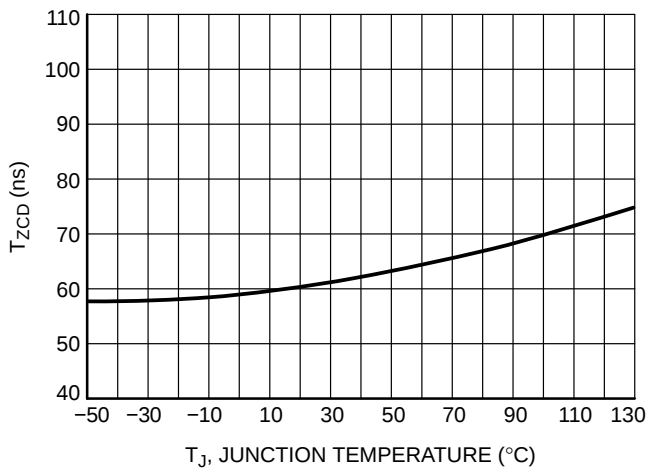


Figure 37.  $((V_{CS/ZCD} < V_{ZCD(th)})$  to DRV High) Delay vs. Temperature

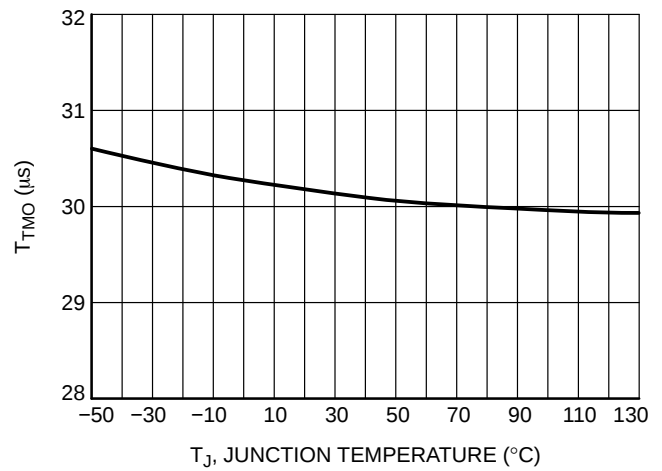


Figure 38. Timeout Timer vs. Temperature

TYPICAL CHARACTERISTICS

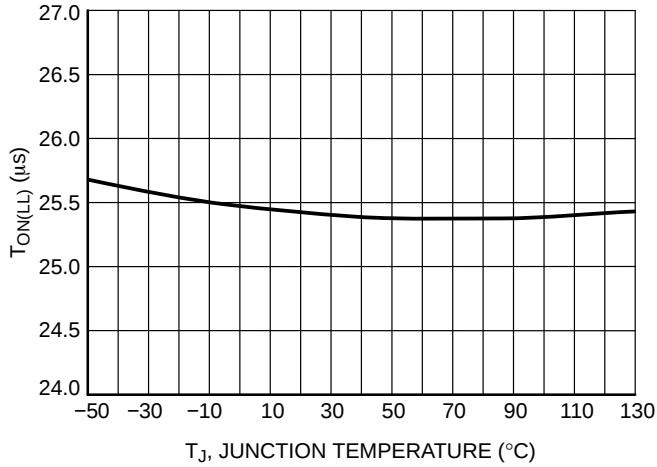


Figure 39. Maximum On Time @  $V_{SENSE} = 1.4\text{ V}$  vs. Temperature

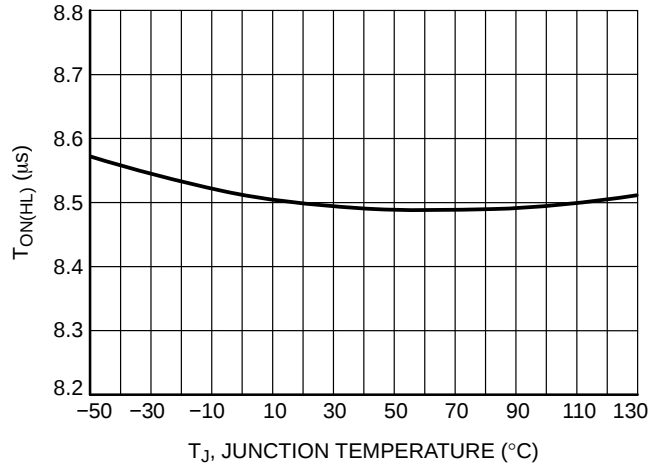


Figure 40. Maximum On Time @  $V_{SENSE} = 2.8\text{ V}$  vs. Temperature

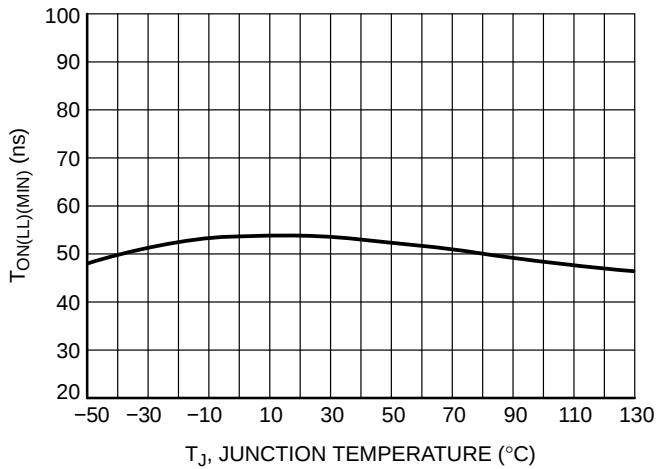


Figure 41. Minimum On Time @  $V_{SENSE} = 1.4\text{ V}$  vs. Temperature

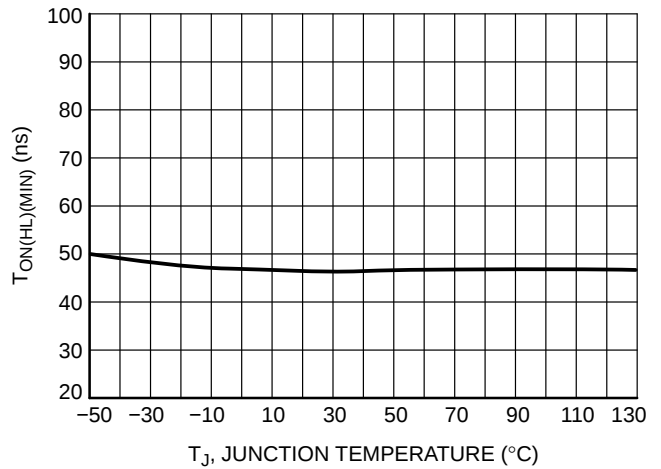


Figure 42. Minimum On Time @  $V_{SENSE} = 2.8\text{ V}$  vs. Temperature

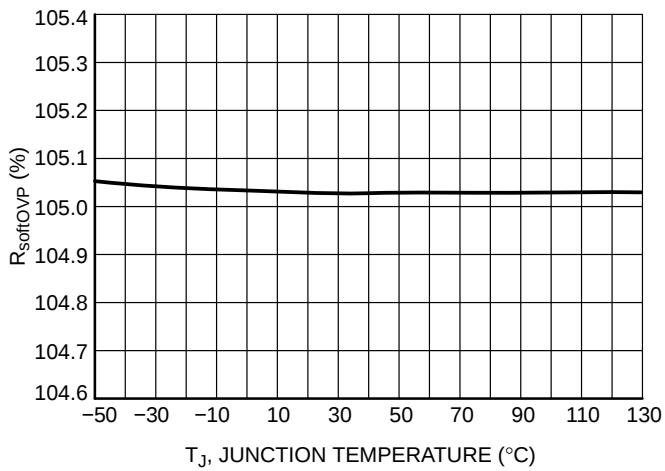


Figure 43. Ratio (Soft OVP Threshold,  $V_{FB}$  Rising) over  $V_{REF}$  vs. Temperature

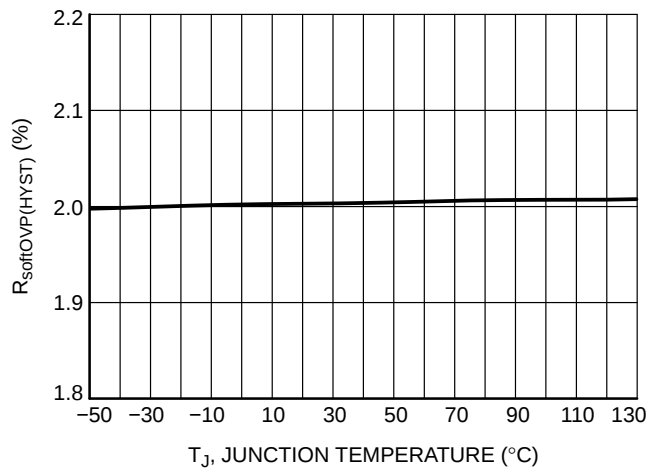


Figure 44. Ratio (Soft OVP Hysteresis) over  $V_{REF}$  vs. Temperature

## TYPICAL CHARACTERISTICS

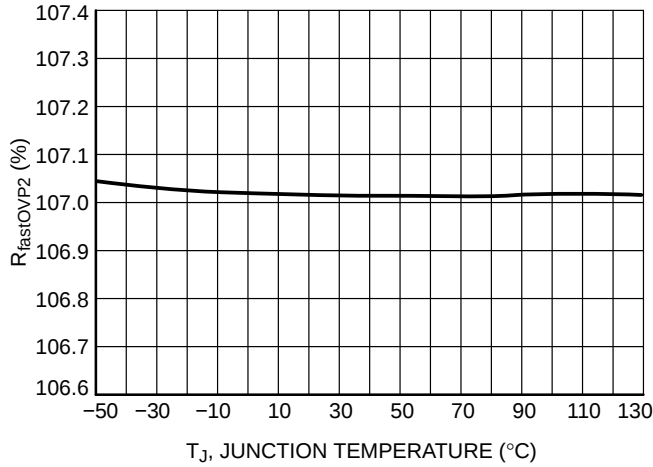


Figure 45. Ratio (Fast OVP Threshold,  $V_{FB}$  Rising) over  $V_{REF}$  vs. Temperature

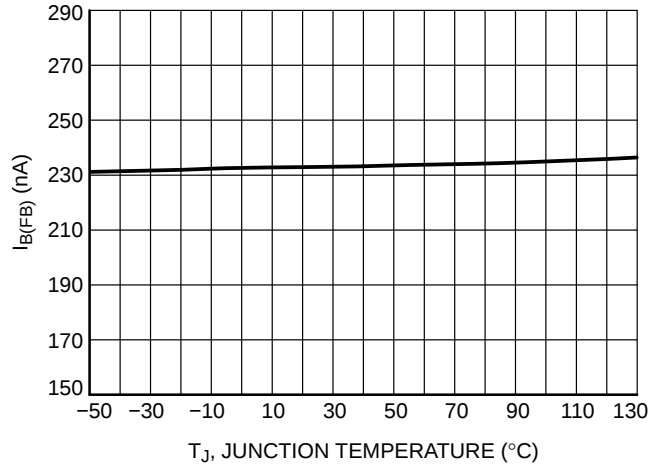


Figure 46. Feedback Pin Bias Current @  $V_{FB} = V_{OVP}$  vs. Temperature

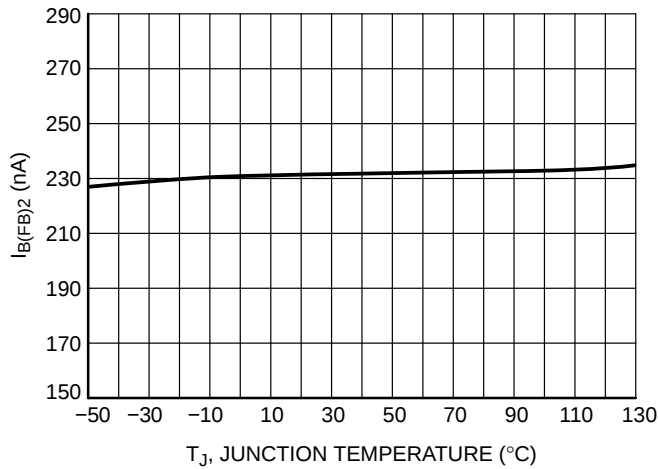


Figure 47. Feedback Pin Bias Current @  $V_{FB} = V_{UVP}$  vs. Temperature

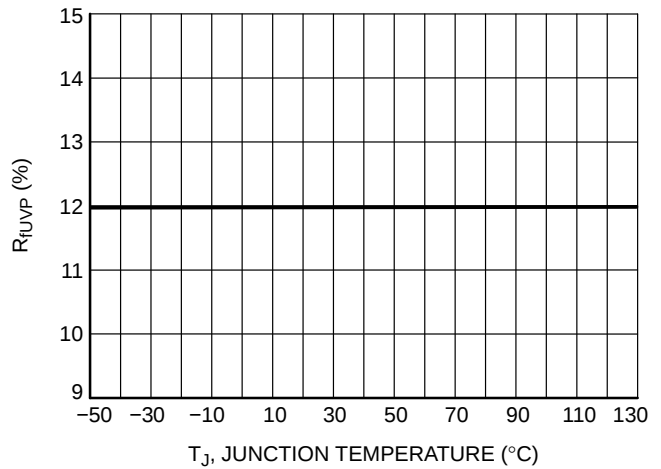


Figure 48. Ratio (UVP Threshold,  $V_{FB}$  Rising) over  $V_{REF}$  vs. Temperature

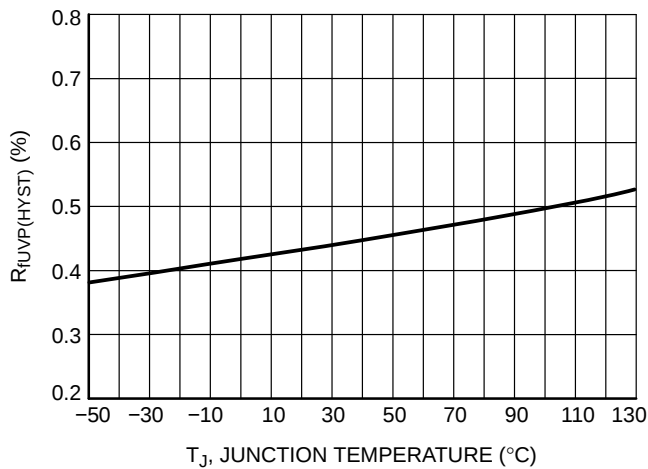


Figure 49. Ratio (UVP Hysteresis) over  $V_{REF}$  vs. Temperature



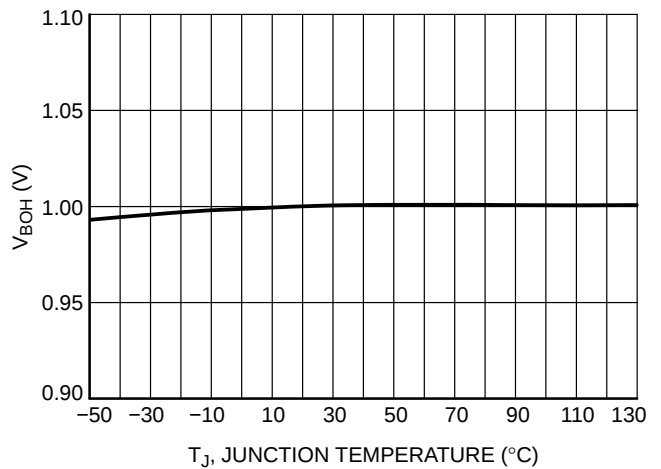


Figure 50. Brown-Out Threshold,  $V_{SENSE}$  Rising vs. Temperature


## TYPICAL CHARACTERISTICS

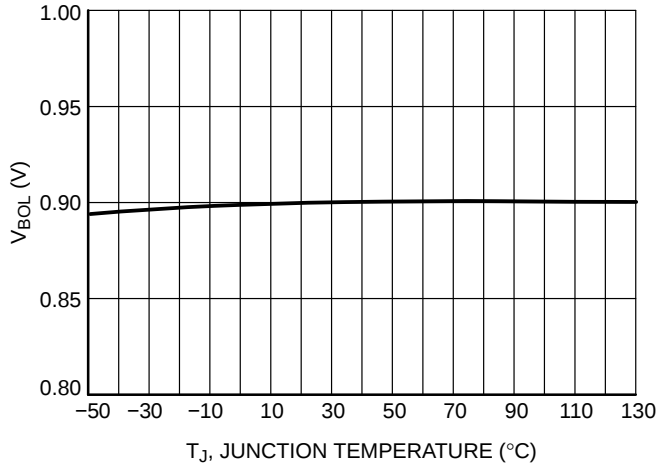


**Figure 51. Brown-Out Threshold,  $V_{SENSE}$  Falling vs. Temperature**

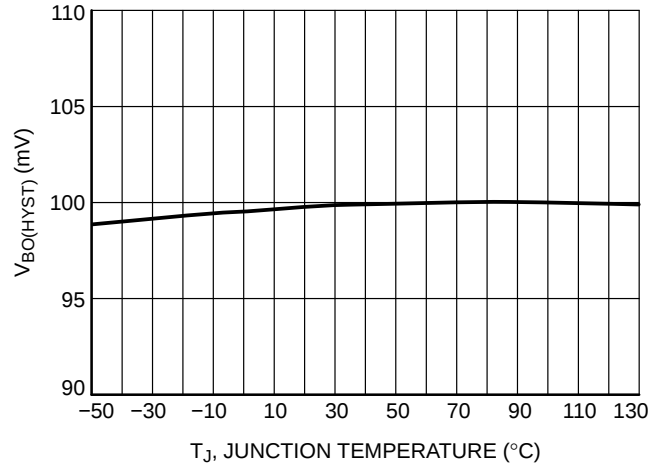


**Figure 52. Brown-Out Comparator Hysteresis vs. Temperature**

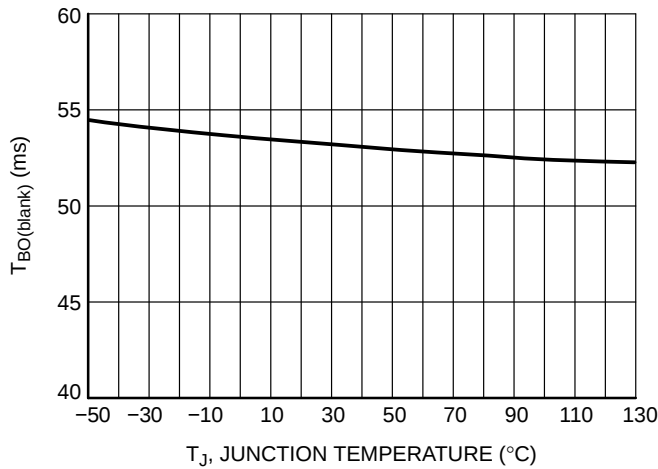


**Figure 53. Brown-Out Blanking Time vs. Temperature**

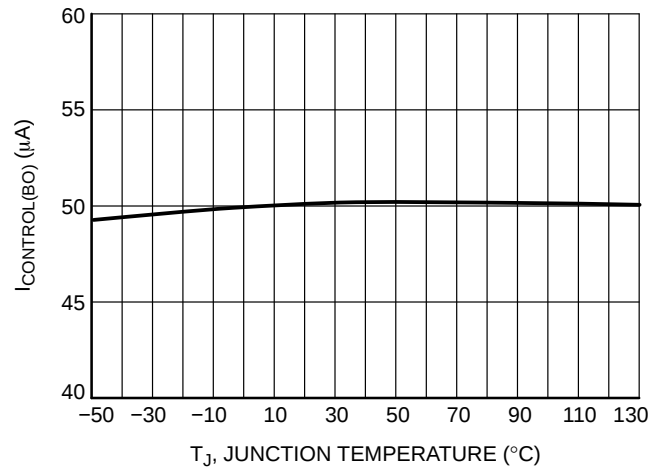

**Figure 54.  $V_{CONTROL}$  Pin Sink Current when a Brown-Out Situation is Detected vs. Temperature**

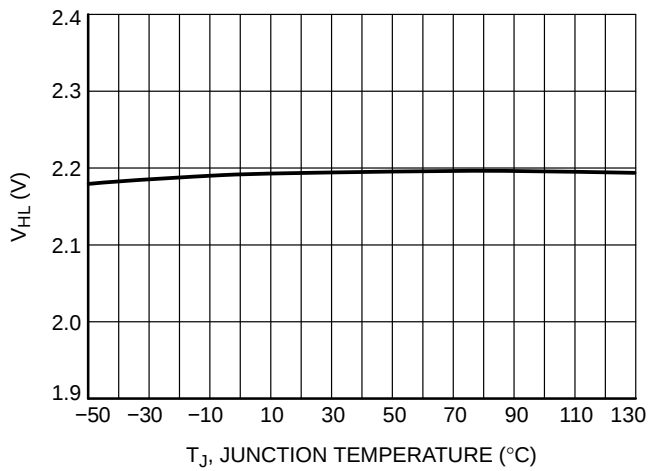

**Figure 55. Comparator Threshold for Line Range Detection,  $V_{SENSE}$  Rising vs. Temperature**

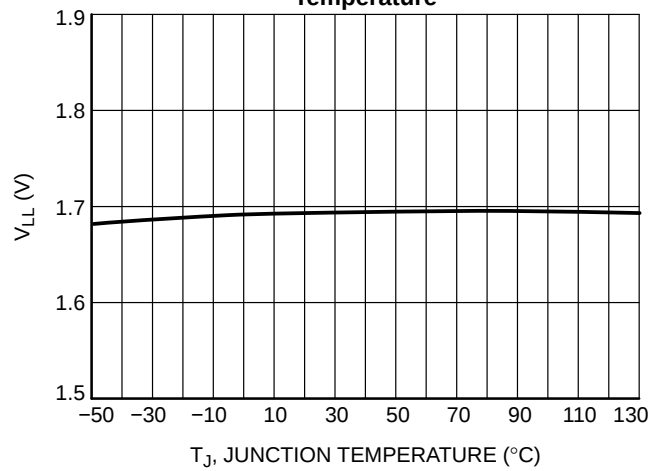

**Figure 56. Comparator Threshold for Line Range Detection,  $V_{SENSE}$  Falling vs. Temperature**

## TYPICAL CHARACTERISTICS

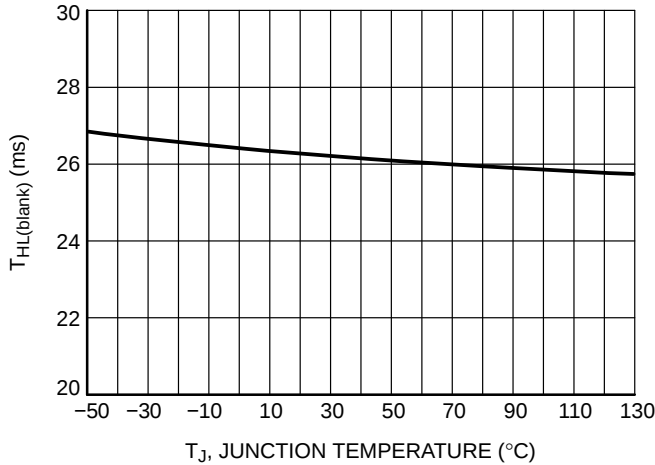


Figure 57. Blanking Time for Line Range Detection vs. Temperature

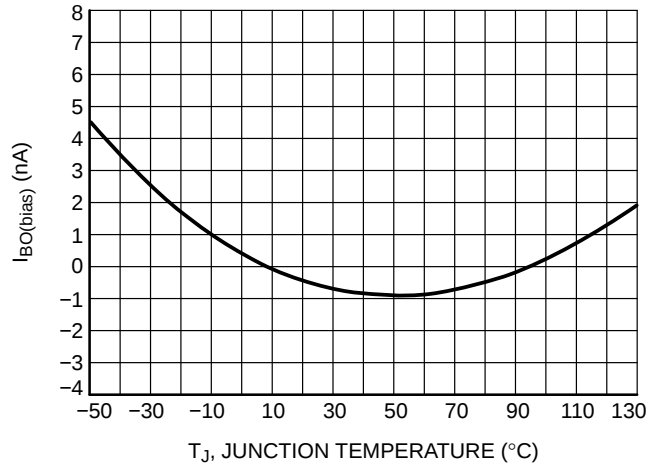


Figure 58. Brown-Out Pin Bias Current, (V<sub>SENSE</sub> = V<sub>BOH</sub>) vs. Temperature

## DETAILED OPERATING DESCRIPTION

### Introduction

The NCP1611 is designed to optimize the efficiency of your PFC stage throughout the load range. In addition, it incorporates protection features for rugged operation. More generally, the NCP1611 is ideal in systems where cost-effectiveness, reliability, low stand-by power and high efficiency are key requirements:

- **Current Controlled Frequency Fold-back:** the NCP1611 is designed to drive PFC boost stages in so-called Current Controlled Frequency Fold-back (CCFF). In this mode, the circuit classically operates in Critical conduction Mode (CrM) when the inductor current exceeds a programmable value. When the current is below this preset level, the NCP1611 linearly reduces the frequency down to about 20 kHz when the current is zero. CCFF maximizes the efficiency at both nominal and light load. In particular, stand-by losses are reduced to a minimum. Similarly to FCCrM controllers, an internal circuitry allows near-unity power factor even when the switching frequency is reduced.
- **Skip Mode:** to further optimize the efficiency, the circuit skips cycles near the line zero crossing when the current is very low. This is to avoid circuit operation when the power transfer is particularly inefficient at the cost of current distortion. When superior power factor is required, this function can be inhibited by offsetting the “FFcontrol” pin by 0.75 V.
- **Low Start-up Current and large V<sub>CC</sub> range (B version):** The start-up consumption of the circuit is minimized to allow the use of high-impedance start-up resistors to pre-charge the V<sub>CC</sub> capacitor. Also, the minimum value of the UVLO hysteresis is 6 V to avoid the need for large V<sub>CC</sub> capacitors and help shorten the start-up time

without the need for too dissipative start-up elements. The A version is preferred in applications where the circuit is fed by an external power source (from an auxiliary power supply or from a downstream converter). Its maximum start-up level (11.25 V) is set low enough so that the circuit can be powered from a 12-V rail. After start-up, the high V<sub>CC</sub> maximum rating allows a large operating range from 9.5 V up to 35 V.

- **Fast Line / Load Transient Compensation (Dynamic Response Enhancer):** since PFC stages exhibit low loop bandwidth, abrupt changes in the load or input voltage (e.g. at start-up) may cause excessive over or under-shoot. This circuit limits possible deviations from the regulation level as follows:
  - The NCP1611 linearly decays the power delivery to zero when the output voltage exceeds 105% of its desired level (soft OVP). If this soft OVP is too smooth and the output continues to rise, the circuit immediately interrupts the power delivery when the output voltage is 107% above its desired level.
  - The NCP1611 dramatically speeds-up the regulation loop when the output voltage goes below 95.5% of its regulation level. In A version, this function is enabled only after the PFC stage has started-up to allow normal soft-start operation to occur.
- **Safety Protections:** the NCP1611 permanently monitors the input and output voltages, the MOSFET current and the die temperature to protect the system from possible over-stress making the PFC stage extremely robust and reliable. In addition to the OVP protection, these methods of protection are provided:

- **Maximum Current Limit:** the circuit senses the MOSFET current and turns off the power switch if the set current limit is exceeded. In addition, the circuit enters a low duty-cycle operation mode when the current reaches 150% of the current limit as a result of the inductor saturation or a short of the bypass diode.
- **Under-Voltage Protection:** this circuit turns off when it detects that the output voltage is below 12% of the voltage reference (typically). This feature protects the PFC stage if the ac line is too low or if there is a failure in the feedback network (e.g., bad connection).
- **Brown-Out Detection:** the circuit detects low ac line conditions and stops operation thus protecting the PFC stage from excessive stress.
- **Thermal Shutdown:** an internal thermal circuitry disables the gate drive when the junction


temperature exceeds 150°C (typically). The circuit resumes operation once the temperature drops below approximately 100°C (50°C hysteresis).

- **Output Stage Totem Pole:** the NCP1611 incorporates a –0.5 A / +0.8 A gate driver to efficiently drive most TO220 or TO247 power MOSFETs.

## NCP1611 Operation Modes

As mentioned, the NCP1611 PFC controller implements a Current Controlled Frequency Fold-back (CCFF) where:

- The circuit operates in classical Critical conduction Mode (CrM) when the inductor current exceeds a programmable value.
- When the current is below this preset level, the NCP1611 linearly reduces the operating frequency down to about 20 kHz when the current is zero.

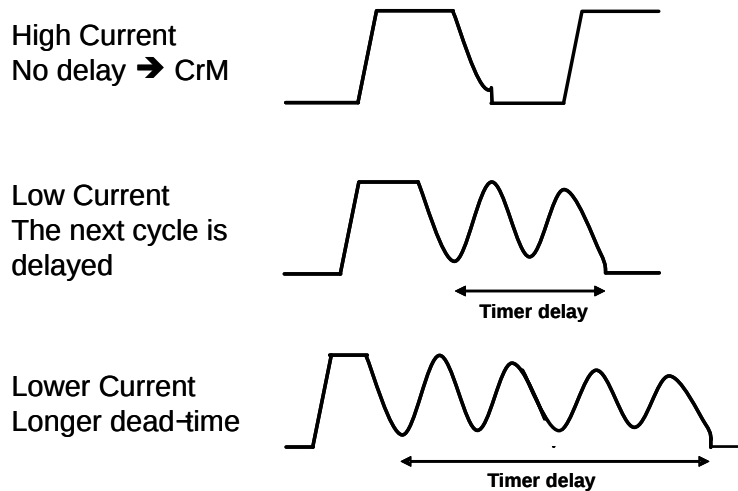


**Figure 59. CCFF Operation**

As illustrated in Figure 59, under high load conditions, the boost stage is operating in CrM but as the load is reduced, the controller enters controlled frequency discontinuous operation.

Figure 60 details the operation. A voltage representative of the input current ("current information") is generated. If this signal is higher than a 2.5 V internal reference (named "Dead-Time Ramp Threshold" in Figure 60), there is no dead-time and the circuit operates in CrM. If the current information is lower than the 2.5 V threshold, a dead-time is inserted that lasts for the time necessary for the internal

ramp to reach 2.5 V from the current information floor. Hence, the lower the current information is, the longer the dead-time. When the current information is 0.75 V, the dead-time is approximately 45 μs.

To further reduce the losses, the MOSFET turns on is stretched until its drain-source voltage is at its valley. As illustrated in Figure 60, the ramp is synchronized to the drain-source ringing. If the ramp exceeds the 2.5 V threshold while the drain-source voltage is below  $V_{in}$ , the ramp is extended until it oscillates above  $V_{in}$  so that the drive will turn on at the next valley.

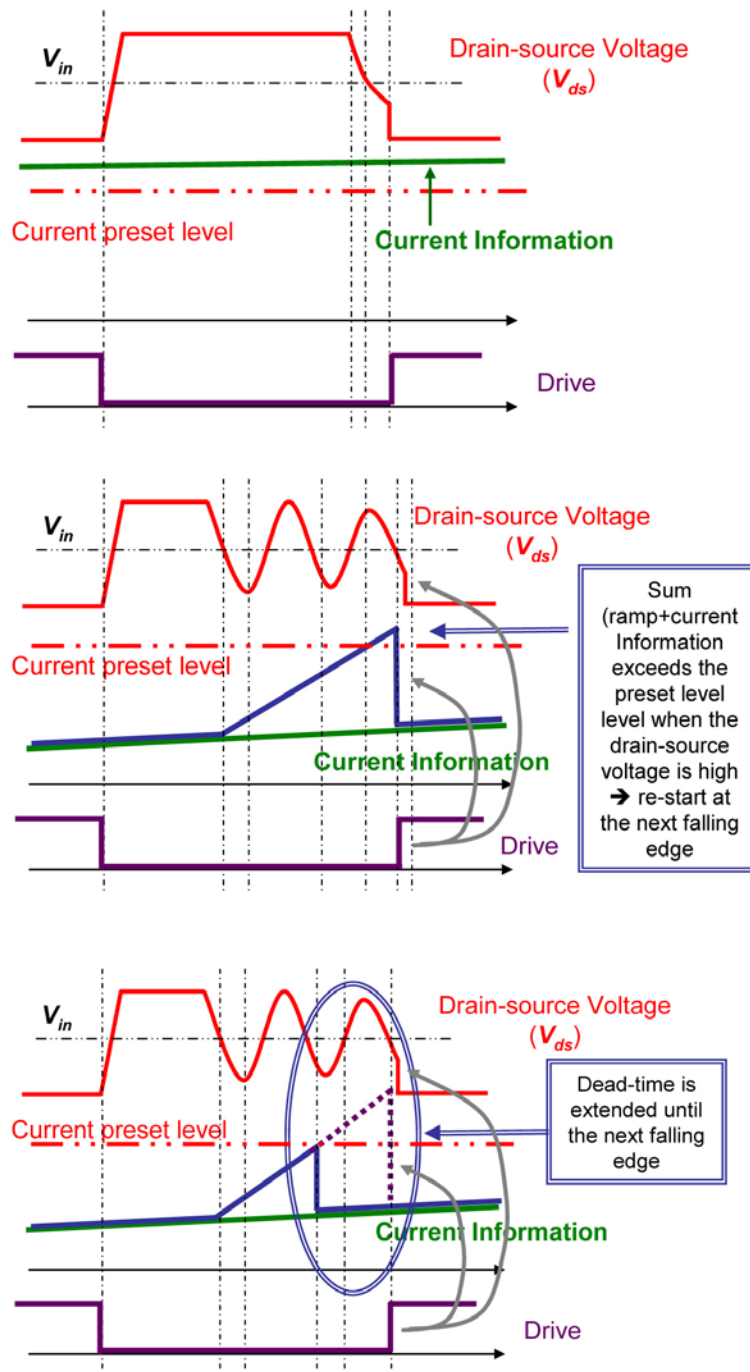

Top: CrM operation when the current information exceeds the preset level during the demagnetization phase

Middle: the circuit re-starts at the next valley if the sum (ramp + current information) exceeds the preset level during the dead-time, while the drain-source voltage is high

Bottom: the sum (ramp + current information) exceeds the preset level while during the dead-time, the drain-source voltage is low. The circuit skips the current valley and re-starts at the following one.

**Figure 60. Dead-Time Generation**

#### Current Information Generation

The “FFcontrol” pin sources a current that is representative of the input current. In practice,  $I_{pin3}$  is built by multiplying the internal control signal ( $V_{REGUL}$ , i.e., the internal signal that controls the on-time) by the sense voltage (pin 2) that is proportional to the input voltage. The

multiplier gain ( $K_m$  of Figure 61) is three times less in high-line conditions (that is when the “LLine” signal from the brown-out block is in low state) so that  $I_{pin3}$  provides a voltage representative of the input current across resistor  $R_{FF}$  placed between pin 3 and ground. Pin 3 voltage is the current information.

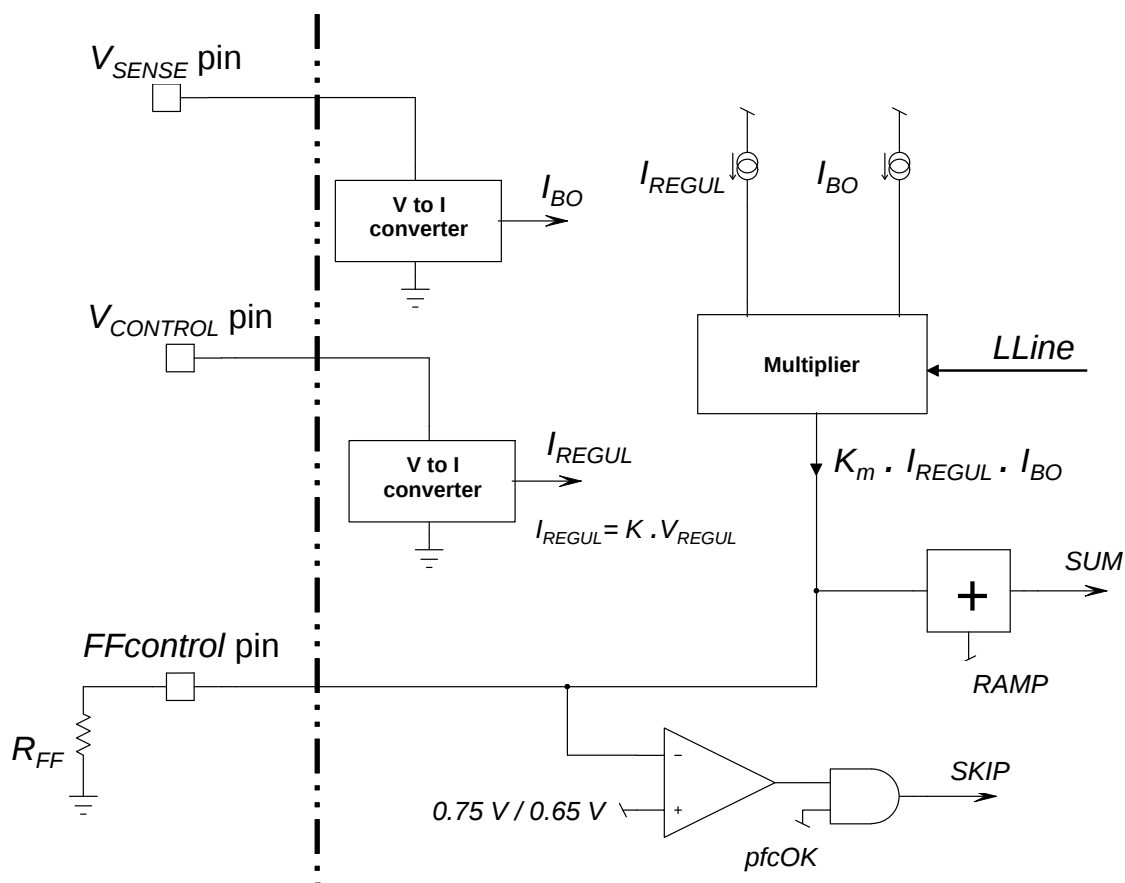


Figure 61. Generation of the Current Information

### Skip Mode

As illustrated in Figure 61, the circuit also skips cycles near the line zero crossing where the current is very low. A comparator monitors the pin 3 voltage (“FFcontrol” voltage) and inhibits the drive when  $V_{pin3}$  is lower than a 0.65 V internal reference. Switching resumes when  $V_{pin3}$  exceeds 0.75 V (0.1 V hysteresis). This inhibits circuit operation when the power transfer is particularly inefficient at the expense of slightly increased current distortion. When superior power factor is needed, this function can be inhibited offsetting the “FFcontrol” pin by 0.75 V. The skip

mode capability is disabled whenever the PFC stage is not in nominal operation (as dictated by the “pfcOK” signal – see block diagram and “pfcOK Internal Signal” Section).

The circuit does not abruptly interrupt the switching when  $V_{pin3}$  goes below 0.65 V. Instead, the signal  $V_{TON}$  that controls the on-time is gradually decreased by grounding the  $V_{REGUL}$  signal applied to the  $V_{TON}$  processing block (see Figure 9). Doing so, the on-time smoothly decays to zero in three to four switching periods typically. Figure 62 shows the practical implementation.

## NCP1611

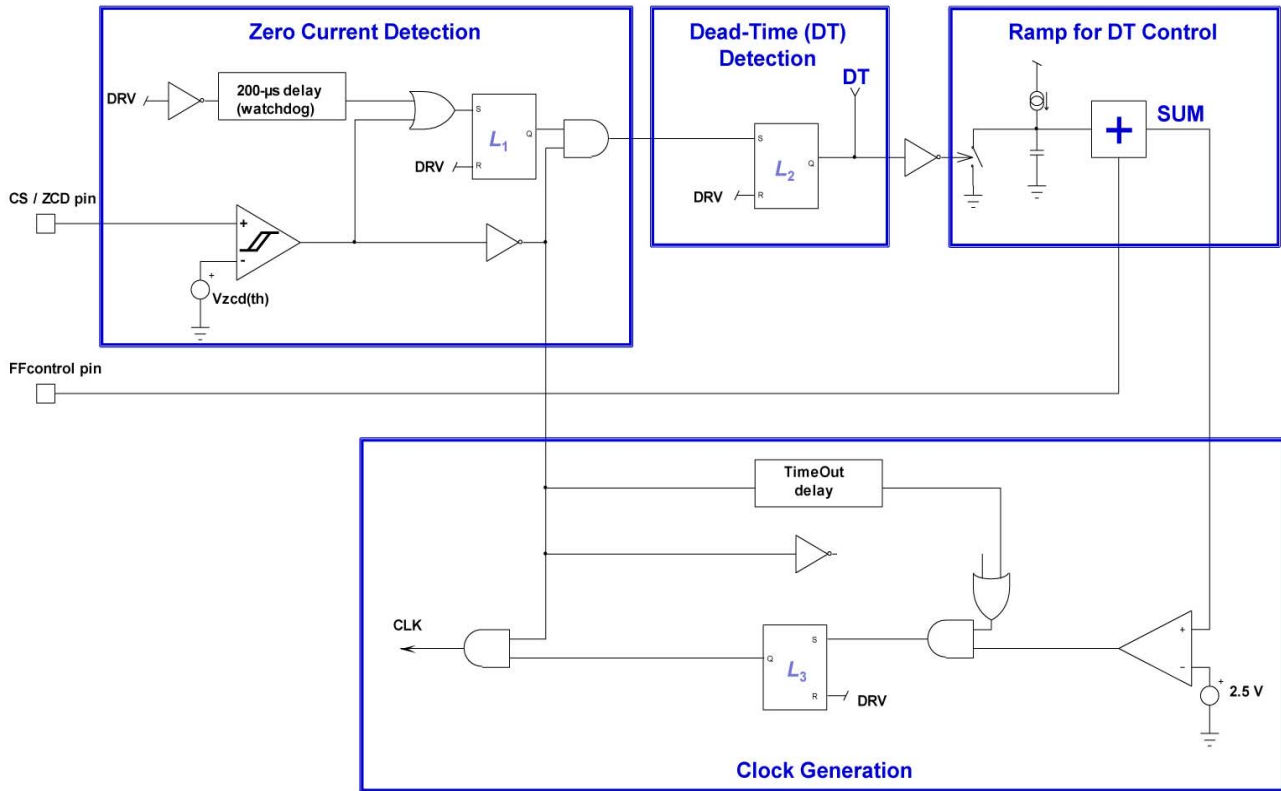


Figure 62. CCFF Practical Implementation

CCFF maximizes the efficiency at both nominal and light load. In particular, the stand-by losses are reduced to a minimum. Also, this method avoids that the system stalls between valleys. Instead, the circuit acts so that the PFC

stage transitions from the  $n$  valley to  $(n + 1)$  valley or vice versa from the  $n$  valley to  $(n - 1)$  cleanly as illustrated by Figure 63.

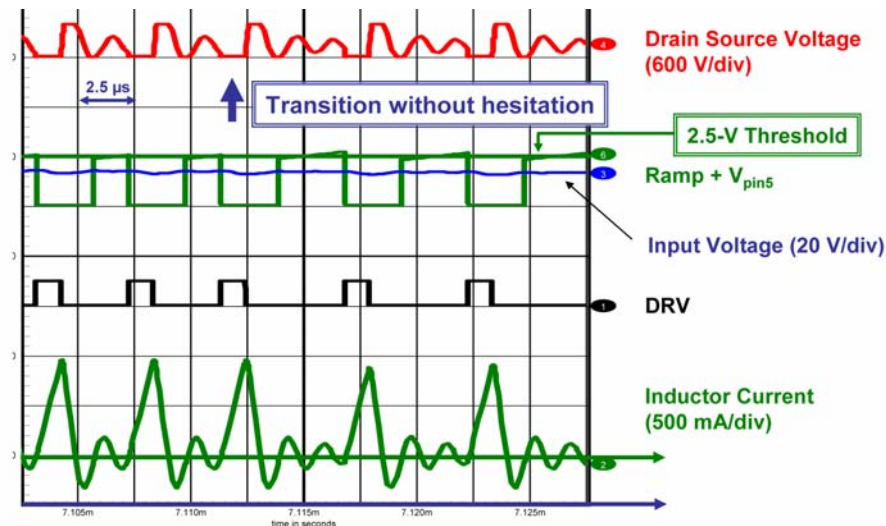


Figure 63. Clean Transition Without Hesitation Between Valleys

### NCP1611 On-time Modulation

Let's analyze the ac line current absorbed by the PFC boost stage. The initial inductor current at the beginning of each switching cycle is always zero. The coil current ramps

up when the MOSFET is *on*. The slope is  $(V_{IN}/L)$  where  $L$  is the coil inductance. At the end of the on-time ( $t_1$ ), the inductor starts to demagnetize. The inductor current ramps down until it reaches zero. The duration of this phase is ( $t_2$ ).

In some cases, the system enters then the dead-time ( $t_3$ ) that lasts until the next clock is generated.

One can show that the ac line current is given by:

$$I_{in} = V_{in} \left[ \frac{t_1(t_1 + t_2)}{2TL} \right] \quad (\text{eq. 1})$$

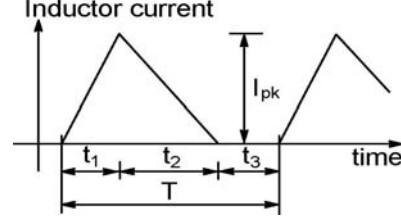
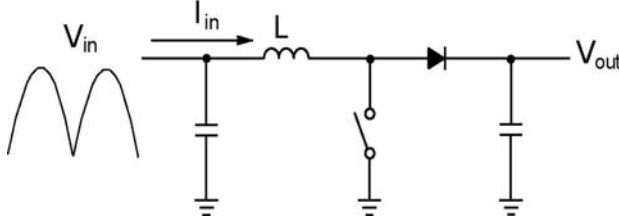


Figure 64. PFC Boost Converter (left) and Inductor Current in DCM (right)

The NCP1611 operates in voltage mode. As portrayed by Figure 8, the MOSFET on-time  $t_1$  is controlled by the signal  $V_{ton}$  generated by the regulation block and an internal ramp as follows:

$$t_1 = \frac{C_{ramp} \cdot V_{ton}}{I_{ch}} \quad (\text{eq. 2})$$

The charge current is constant at a given input voltage (as mentioned, it is 3 times higher at high line compared to its value at low line).  $C_{ramp}$  is an internal capacitor.

The output of the regulation block ( $V_{CONTROL}$ ) is linearly transformed into a signal ( $V_{REGUL}$ ) varying between 0 and 1 V. ( $V_{REGUL}$ ) is the voltage that is injected into the PWM section to modulate the MOSFET duty-cycle. The NCP1611 includes some circuitry that processes ( $V_{REGUL}$ ) to form the signal ( $V_{ton}$ ) that is used in the PWM section (see Figure 9). ( $V_{ton}$ ) is modulated in response to the dead-time sensed during the precedent current cycles, that is, for a proper shaping of the ac line current. This modulation leads to:

$$V_{ton} = \frac{T \cdot V_{REGUL}}{t_1 + t_2} \quad (\text{eq. 3})$$

or

$$V_{ton} \cdot \frac{t_1 + t_2}{T} = V_{REGUL}$$

Given the low regulation bandwidth of the PFC systems, ( $V_{CONTROL}$ ) and then ( $V_{REGUL}$ ) are slow varying signals. Hence, the ( $V_{ton} \cdot (t_1 + t_2) / T$ ) term is substantially constant. Provided that in addition, ( $t_1$ ) is proportional to ( $V_{ton}$ ), Equation 1 leads to: ( $I_{in} = k \cdot V_{in}$ ), where  $k$  is a constant. More exactly:

$$I_{in} = k \cdot V_{in}$$

$$\text{where : } k = \text{constant} = \left[ \frac{1}{2L} \cdot \frac{V_{REGUL}}{(V_{REGUL})_{max}} \cdot t_{on,max} \right]$$

Where  $t_{on,max}$  is the maximum on-time obtained when  $V_{REGUL}$  is at its ( $V_{REGUL})_{max}$  maximum level. The

Where  $T = (t_1 + t_2 + t_3)$  is the switching period and  $V_{in}$  is the ac line rectified voltage.

In light of this equation, we immediately note that  $I_{in}$  is proportional to  $V_{in}$  if  $[t_1(t_1 + t_2) / T]$  is a constant.

parametric table shows that  $t_{on,max}$  is equal to 25  $\mu s$  ( $T_{ON(LL)}$ ) at low line and to 8.3  $\mu s$  ( $T_{ON(HL)}$ ) at high line (when pin2 happens to exceed 2.2 V with a pace higher than 40 Hz – see BO 25 ms blanking time).

The input current is then proportional to the input voltage. Hence, the ac line current is properly shaped.

One can note that this analysis is also valid in the CrM case. This condition is just a particular case of this functioning where ( $t_3=0$ ), which leads to ( $t_1+t_2=T$ ) and ( $V_{TON}=V_{REGUL}$ ). That is why the NCP1611 automatically adapts to the conditions and transitions from DCM and CrM (and vice versa) without power factor degradation and without discontinuity in the power delivery.

Hence, we can re-write the above equation as follows:

$$I_{in} = \frac{V_{in} \cdot T_{ON(LL)}}{2 \cdot L} \cdot \frac{V_{REGUL}}{(V_{REGUL})_{max}}$$

at low line.

$$I_{in} = \frac{V_{in} \cdot T_{ON(HL)}}{2 \cdot L} \cdot \frac{V_{REGUL}}{(V_{REGUL})_{max}}$$

at high line.

From these equations, we can deduce the expression of the average input power:

$$P_{in,avg} = \frac{(V_{in,rms})^2 \cdot V_{REGUL} \cdot T_{ON(LL)}}{2 \cdot L \cdot (V_{REGUL})_{max}}$$

at low line

$$P_{in,avg} = \frac{(V_{in,rms})^2 \cdot V_{REGUL} \cdot T_{ON(HL)}}{2 \cdot L \cdot (V_{REGUL})_{max}}$$

at high line

Where ( $V_{REGUL})_{max}$  is the 1 V  $V_{REGUL}$  maximum value.


Hence, the maximum power that can be delivered by the PFC stage is:

$$(P_{in,avg})_{max} = \frac{(V_{in,rms})^2 \cdot T_{ON(LL)}}{2 \cdot L}$$


at low line

$$(P_{in,avg})_{max} = \frac{(V_{in,rms})^2 \cdot T_{ON(HL)}}{2 \cdot L}$$

at high line

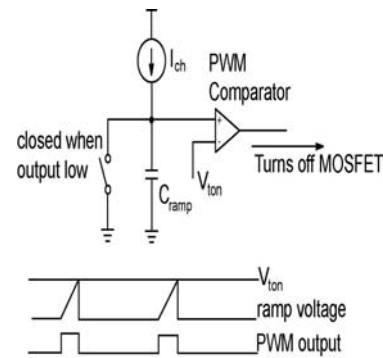

**Figure 65. PWM circuit and timing diagram.**

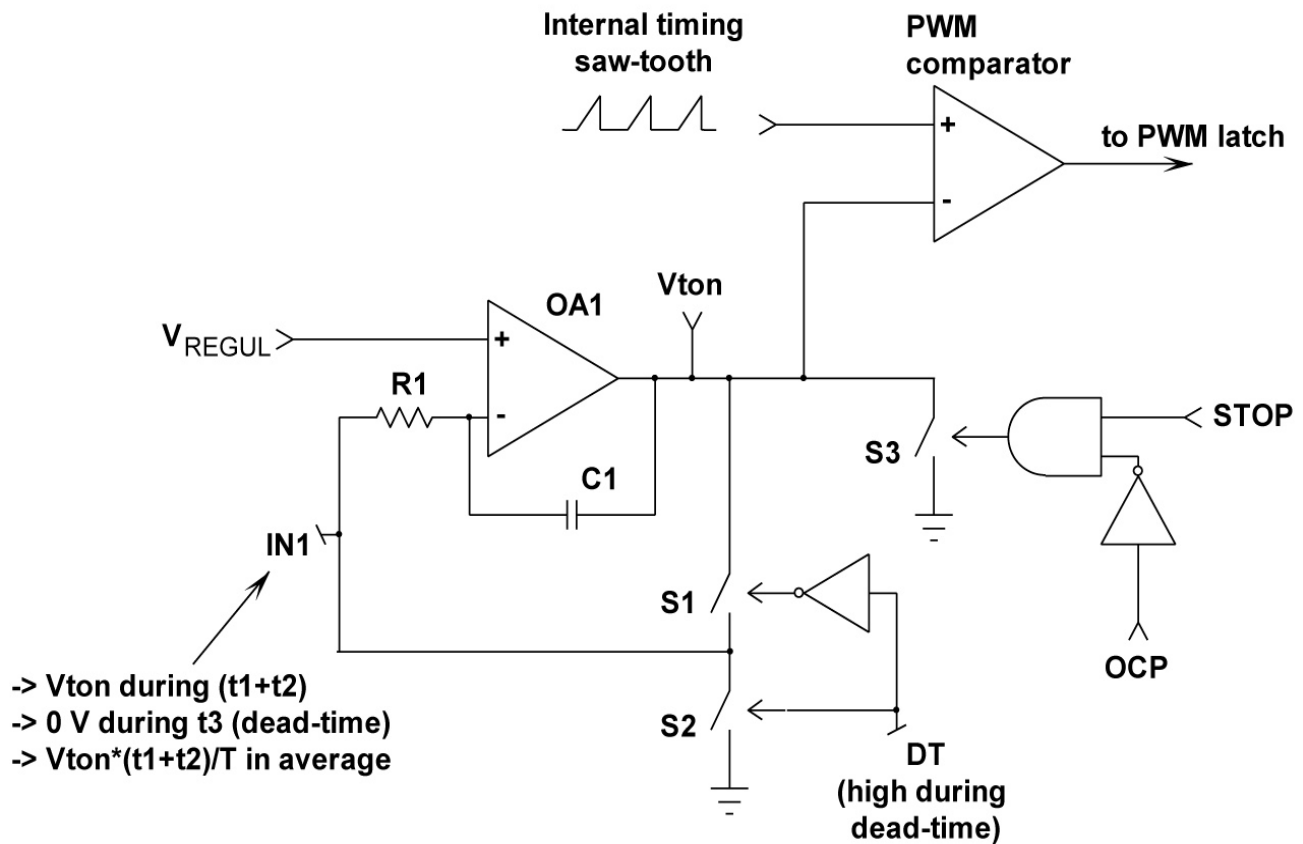

**Figure 66. V<sub>TON</sub> Processing Circuit.** The integrator OA1 amplifies the error between V<sub>REGUL</sub> and IN1 so that on average, (V<sub>TON</sub> \* (t<sub>1</sub>+t<sub>2</sub>)/T) equates V<sub>REGUL</sub>.

**Remark:**

The “ $V_{ton}$  processing circuit” is “informed” when a condition possibly leading to a long interruption of the drive activity (functions generating the STOP signal that disables the drive – see block diagram – except OCP, i.e., OVP, OverStress, SKIP, staticOVP and OFF). Otherwise, such situations would be viewed as a normal dead-time phase and  $V_{ton}$  would inappropriately over-dimension  $V_{ton}$  to compensate it. Instead, as illustrated in Figure 66, the  $V_{ton}$  signal is grounded leading to a short soft-start when the circuit recovers.

### Regulation Block and Output Voltage Control

A trans-conductance error amplifier (OTA) with access to the inverting input and output is provided. It features a typical trans-conductance gain of  $200\ \mu\text{S}$  and a maximum capability of  $\pm 20\ \mu\text{A}$ . The output voltage of the PFC stage is typically scaled down by a resistors divider and monitored by the inverting input (pin 8). Bias current is minimized (less than  $500\ \text{nA}$ ) to allow the use of a high impedance feed-back network. However, it is high enough so that the pin remains in low state if the pin is not connected.

The output of the error amplifier is brought to pin 1 for external loop compensation. Typically a type 2 network is applied between pin1 and ground, to set the regulation bandwidth below about 20 Hz and to provide a decent phase boost.

The swing of the error amplifier output is limited within an accurate range:

- It is forced above a voltage drop ( $V_F$ ) by some circuitry.

- It is clamped not to exceed  $4.0\text{ V} + \text{the same } V_F$  voltage drop.

Hence,  $V_{pin1}$  features a 4 V voltage swing.  $V_{pin1}$  is then offset down by ( $V_F$ ) and scaled down by a resistors divider before it connects to the “ $V_{TON}$  processing block” and the PWM section. Finally, the output of the regulation block is a signal (“ $V_{REGUL}$ ” of the block diagram) that varies between 0 and a top value corresponding to the maximum on-time.

The  $V_F$  value is 0.5 V typically.

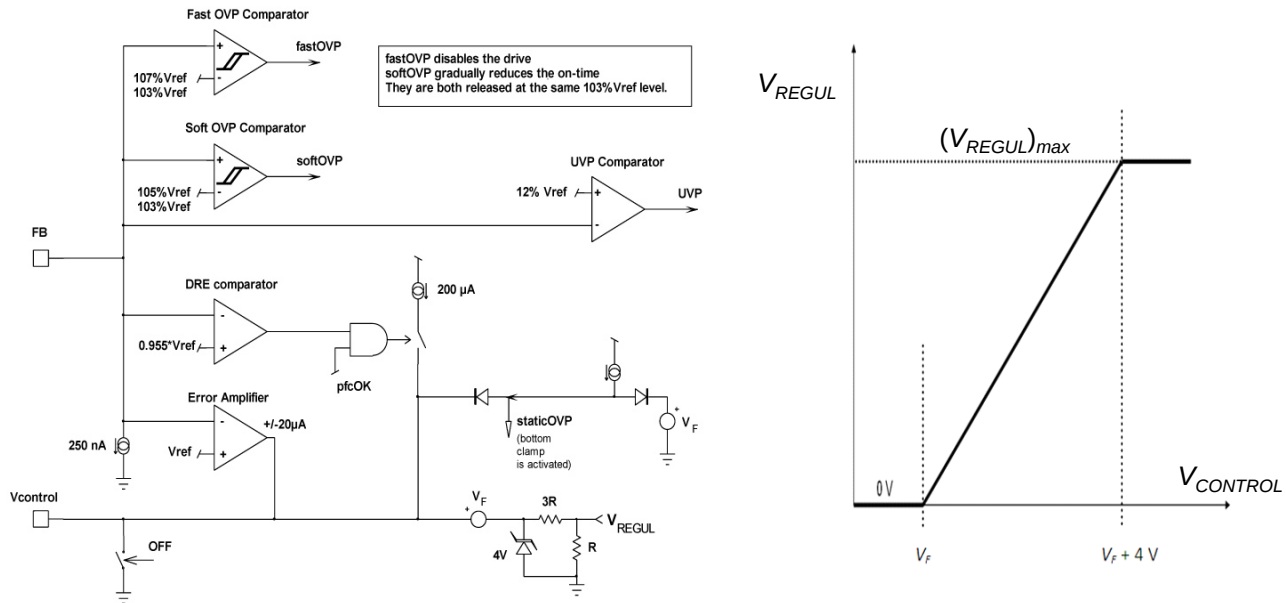


Figure 67. a) Regulation Block Figure (left), b) Correspondence Between  $V_{CONTROL}$  and  $V_{REGUL}$  (right)

Given the low bandwidth of the regulation loop, abrupt variations of the load, may result in excessive over or under-shoot. Over-shoot is limited by the Over-Voltage Protection connected to pin 8.

The NCP1611 embeds a “*dynamic response enhancer*” circuitry (DRE) that contains under-shoots. An internal comparator monitors the feed-back ( $V_{pin8}$ ) and when  $V_{pin8}$  is lower than 95.5% of its nominal value, it connects a 200  $\mu\text{A}$  current source to speed-up the charge of the compensation network. Effectively this appears as a 10x increase in the loop gain.

In A version, DRE is disabled during the start-up sequence until the PFC stage has stabilized (that is when the “pfcOK” signal of the block diagram, is high). The resulting slow and gradual charge of the pin1 voltage ( $V_{CONTROL}$ ) softens the soft start-up sequence. In B version, DRE is enabled during start-up to speed-up this phase and allow for the use of smaller  $V_{CC}$  capacitors.

The circuit also detects overshoot and immediately reduces the power delivery when the output voltage exceeds 105% of its desired level. The NCP1611 does not abruptly interrupt the switching. Instead, the signal  $V_{TON}$  that controls the on-time is gradually decreased by grounding

the  $V_{REGUL}$  signal applied to the  $V_{TON}$  processing block (see Figure 66). Doing so, the on-time smoothly decays to zero in four to five switching periods typically. If the output voltage still increases, a second comparator immediately disables the driver if the output voltage exceeds 107% of its desired level.

The error amplifier OTA and the OVP, UVP and DRE comparators share the same input information. Based on the typical value of their parameters and if ( $V_{out,nom}$ ) is the output voltage nominal value (e.g., 390 V), we can deduce:

- Output Regulation Level:  $V_{out,nom}$
- Output UVP Level:  $V_{out,uvp} = 12\% \times V_{out,nom}$
- Output DRE Level:  $V_{out,dre} = 95.5\% \times V_{out,nom}$
- Output Soft OVP Level:  $V_{out,sovp} = 105\% \times V_{out,nom}$
- Output Fast OVP level:  $V_{out,fovp} = 107\% \times V_{out,nom}$

#### Current Sense and Zero Current Detection

The NCP1611 is designed to monitor the current flowing through the power switch. A current sense resistor ( $R_{sense}$ ) is inserted between the MOSFET source and ground to generate a positive voltage proportional to the MOSFET current ( $V_{CS}$ ). The  $V_{CS}$  voltage is compared to a 500 mV internally reference. When  $V_{CS}$  exceeds this threshold, the

OCP signal turns high to reset the PWM latch and forces the driver low. A 200 ns blanking time prevents the OCP comparator from tripping because of the switching spikes that occur when the MOSFET turns on.

The CS pin is also designed to receive a signal from an auxiliary winding for Zero Current Detection. As illustrated in Figure 68, an internal ZCD comparator monitors the pin4 voltage and if this voltage exceeds 750 mV, a demagnetization phase is detected (signal ZCD is high). The auxiliary winding voltage is applied through a diode to prevent this signal from distorting the current sense information during the on-time. Thus, the OCP protection is not impacted by the ZCD sensing circuitry. This comparator incorporates a 500 mV hysteresis and is able to detect ZCD pulses longer than 200 ns. When pin4 voltage drops below the lower ZCD threshold, the driver can turn high within 200 ns.

It may happen that the MOSFET turns on while a huge current flows through the inductor. As an example such a situation can occur at start-up when large in-rush currents charge the bulk capacitor to the line peak voltage. Traditionally, a bypass diode is generally placed between the

input and output high-voltage rails to divert this inrush current. If this diode is accidentally shorted, the MOSFET will also see a high current when it turns on. In both cases, the current can be large enough to trigger the ZCD comparator. An AND gate detects that this event occurs while the drive signal is high. In this case, the “OverStress” signal goes high and disables the driver for an 800  $\mu$ s delay. This long delay leads to a very low duty-ratio operation in case of “OverStress” fault in order to limit the risk of overheating.

When no signal is received that triggers the ZCD comparator during the off-time, an internal 200- $\mu$ s watchdog timer initiates the next drive pulse. At the end of this delay, the circuit senses the CS/ZCD pin impedance to detect a possible grounding of this pin and prevent operation. The CS/ZCD external components must be selected to avoid false fault detection. 3.9 k $\Omega$  is the recommended minimum impedance to be applied to the CS/ZCD pin when considering the NCP1611 parameters tolerance over the -40°C to 125°C temperature range. **Practically,  $R_{CS}$  must be higher than 3.9 k $\Omega$  in the application of Figure 68.**

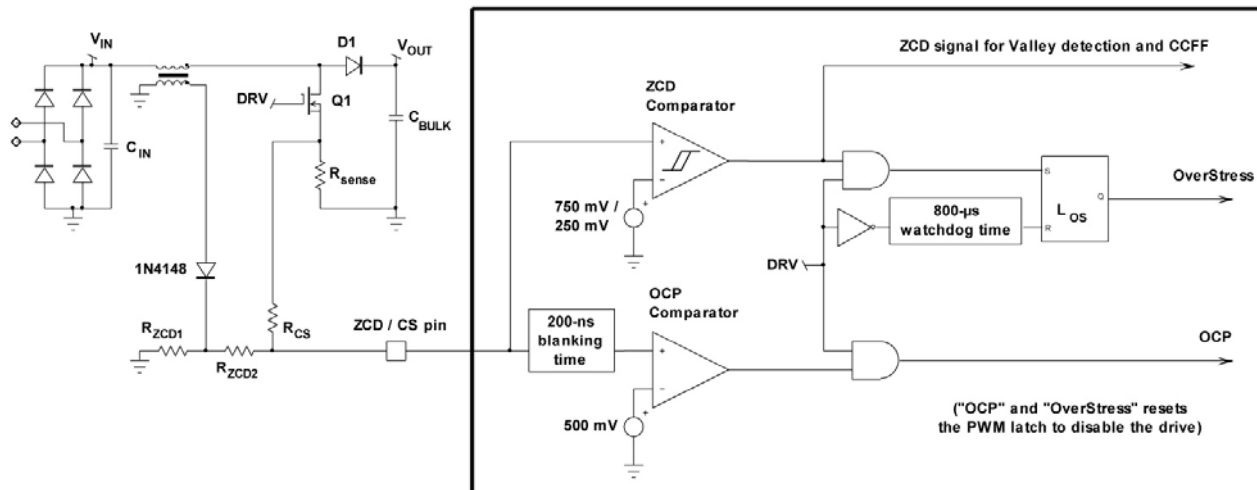


Figure 68. Current Sense and Zero Current Detection Blocks

### Brown-Out Detection

The  $V_{SENSE}$  pin (pin2) receives a portion of the instantaneous input voltage ( $V_{in}$ ). As  $V_{in}$  is a rectified sinusoid, the monitored signal varies between zero or a small voltage and a peak value.

For the brown-out block, we need to ensure that the line magnitude is high enough for operation. This is done as follows:

- The  $V_{SENSE}$  pin voltage is compared to a 1 V reference.
- If  $V_{pin2}$  exceeds 1 V, the input voltage is considered sufficient
- If  $V_{pin2}$  remains below 0.9 V for 50 ms, the circuit detects a brown-out situation (100 mV hysteresis).

By default, when the circuit starts operation, the circuit is in a fault state (“BO\_NOK” high) until  $V_{pin2}$  exceeds 1 V.

When “BO\_NOK” is high, the drive is not disabled. Instead, a 50  $\mu$ A current source is applied to pin 1 to gradually reduce  $V_{CONTROL}$ . As a result, the circuit only stops pulsing when the staticOVP function is activated (that is when  $V_{CONTROL}$  reaches the skip detection threshold). At that moment, the circuit turns off (see Figure 2). This method limits any risk of false triggering. The input of the PFC stage has some impedance that leads to some sag of the input voltage when the input current is large. If the PFC stage suddenly stops while a high current is drawn from the mains, the abrupt decay of the current may make the input voltage rise and the circuit detect a correct line level. Instead, the

gradual decrease of  $V_{\text{CONTROL}}$  avoids a line current discontinuity and limits the risk of false triggering.

Pin2 is also used to sense the line for feed-forward. A similar method is used:

- The  $V_{\text{SENSE}}$  pin voltage is compared to a 2.2 V reference.
- If  $V_{\text{pin2}}$  exceeds 2.2 V, the circuit detects a high-line condition and the loop gain is divided by three (the internal PWM ramp slope is three times steeper)

- Once this occurs, if  $V_{\text{pin2}}$  remains below 1.7 V for 25 ms, the circuit detects a low-line situation (500 mV hysteresis).

At startup, the circuit is in low-line state (“LLine” high) until  $V_{\text{pin2}}$  exceeds 2.2 V.

The line range detection circuit allows more optimal loop gain control for universal (wide input mains) applications.

As portrayed in Figure 69, the pin 2 voltage is also utilized to generate the current information required for the frequency fold-back function.

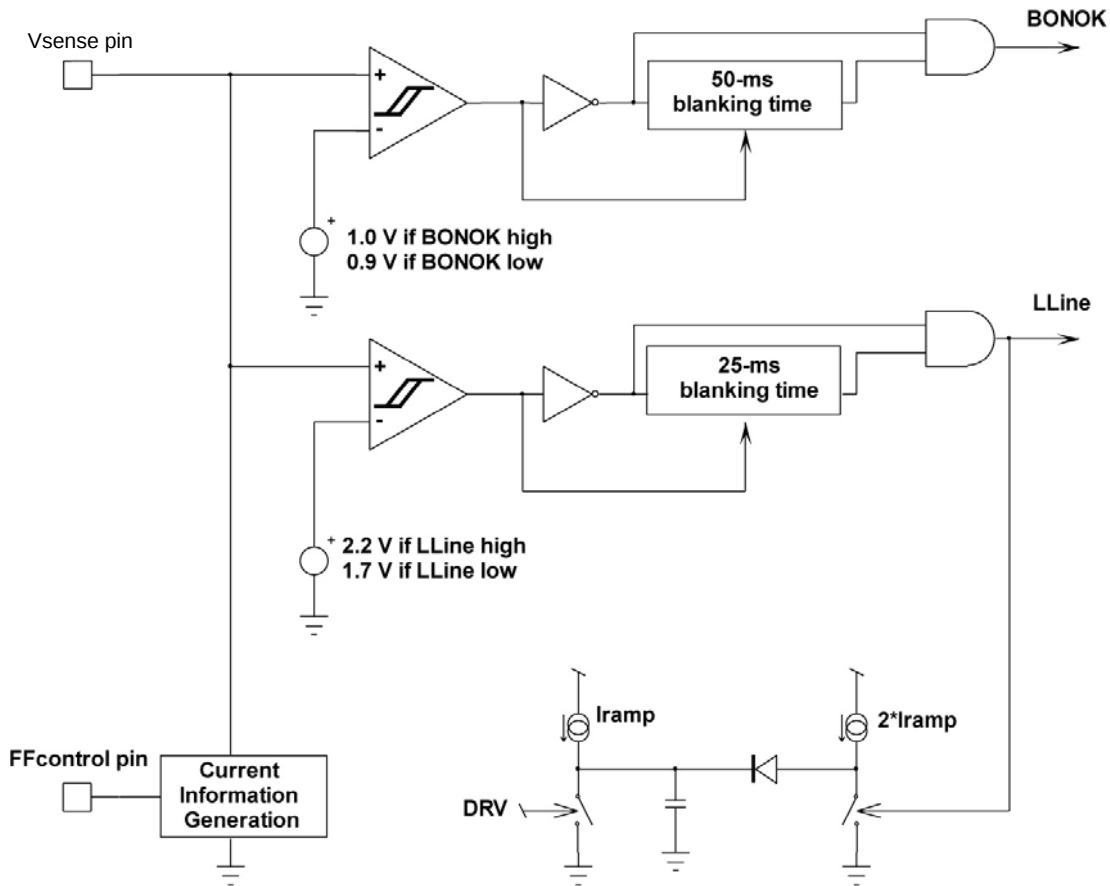


Figure 69. Input Line Sense Monitoring

### Thermal Shutdown (TSD)

An internal thermal circuitry disables the circuit gate drive and keeps the power switch off when the junction temperature exceeds 150°C. The output stage is then enabled once the temperature drops below about 100°C (50°C hysteresis).

### Output Drive Section

The output stage contains a totem pole optimized to minimize the cross conduction current during high frequency operation. The gate drive is kept in a sinking mode whenever the Under-Voltage Lockout is active or more generally whenever the circuit is off (i.e., when the “Fault Latch” of the block diagram is high). Its high current capability (–500 mA/+800 mA) allows it to effectively drive high gate charge power MOSFET. As the circuit exhibits a large  $V_{\text{CC}}$  range (up to 35 V), the drive pin voltage is clamped not to provide the MOSFET gate with more than 14 V.

## Reference Section

The circuit features an accurate internal 2.5 V reference voltage ( $V_{REF}$ ) optimized to be  $\pm 2.4\%$  accurate over the temperature range.

## OFF Mode

As previously mentioned, the circuit turns off when one of the following faults is detected:

- Incorrect feeding of the circuit (“UVLO” high when  $V_{CC} < V_{CC(off)}$ ,  $V_{CC(off)}$  equating 9 V typically).
- Excessive die temperature detected by the thermal shutdown.
- Under-Voltage Protection.
- Brown-Out Fault and static OVP (see block diagram)

Generally speaking, the circuit turns off when the conditions are not proper for desired operation. In this mode, the controller stops operating. The major part of the circuit sleeps and its consumption is minimized.

## More specifically, when the circuit is in OFF state:

- The drive output is kept low
- All the blocks are off except:
  - The UVLO circuitry that keeps monitoring the  $V_{CC}$  voltage and controlling the start-up current source accordingly.
  - The TSD (thermal shutdown)
  - The Under-Voltage Protection (“UVP”).
  - The brown-out circuitry
- $V_{CONTROL}$  is grounded so that when the fault is removed, the device starts-up under the soft start mode (B Version).
- The internal “pfcOK” signal is grounded.
- The output of the “ $V_{TON}$  processing block” is grounded

## Failure detection

When manufacturing a power supply, elements can be accidentally shorted or improperly soldered. Such failures can also happen to occur later on because of the components fatigue or excessive stress, soldering defaults or external interactions. In particular, adjacent pins of controllers can be shorted, a pin can be grounded or badly connected. Such open/short situations are generally required not to cause fire, smoke nor big noise. The NCP1611 integrates functions that ease meet this requirement. Among them, we can list:

- Floating feedback pin  
A 250 nA sink current source pulls down the voltage on the feedback pin if it is floating so that the UVP protection trips and prevents the circuit from operating. This current source is small (450 nA maximum) so that its impact on the bulk voltage regulation level remains negligible with typical feedback resistor dividers.
- Fault of the GND connection  
If the GND pin is properly connected, the supply current drawn from the positive terminal of the  $V_{CC}$  capacitor, flows out of the GND pin to return to the negative terminal of the  $V_{CC}$  capacitor. If the GND pin is not connected, the circuit ESD diodes offer another return path. The accidental non connection of the GND pin can hence be detected by detecting that one of this ESD diode is conducting. Practically, the CS/ZCD ESD diode is monitored. If such a fault is detected for 200  $\mu$ s, the circuit stops operating.
- Detection the CS/ZCD pin improper connection  
The CS/ZCD pin sources a 1  $\mu$ A current to pull up the pin voltage and hence disable the part when the pin is floating. If the CS/ZCD pin is grounded, the circuit cannot monitor the ZCD signal and the 200  $\mu$ s watchdog timer is activated. When the watchdog time has elapsed, the circuit sources a 250  $\mu$ A current source to pull-up the CS/ZCD pin voltage. No drive pulse is initiated until the CS/ZCD pin voltage exceeds the ZCD 0.75 V threshold. Hence, if the pin is grounded, the circuit stops operating. Circuit proper operation requires the pin impedance to be 3.9 k $\Omega$  or more, the tolerance of the NCP1611 impedance testing function being considered over the  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  temperature range.
- Boost or bypass diode short  
The NCP1611 addresses the short situations of the boost and bypass diodes (a bypass diode is generally placed between the input and output high-voltage rails to divert this inrush current). Practically, the overstress protection is implemented to detect such conditions and forces a low duty-cycle operation until the fault is gone.


Refer to application note AND9064 available at [http://www.onsemi.com/pub\\_link/Collateral/AND9064-D.PDF](http://www.onsemi.com/pub_link/Collateral/AND9064-D.PDF) for more details.

## ORDERING INFORMATION

| Device       | Circuit Version | Package             | Shipping <sup>†</sup> |
|--------------|-----------------|---------------------|-----------------------|
| NCP1611ADR2G | NCP1611A        | SOIC-8<br>(Pb-Free) | 2500 / Tape & Reel    |
| NCP1611BDR2G | NCP1611B        |                     |                       |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS



SCALE 1:1

SOIC-8 NB  
CASE 751-07  
ISSUE AK

DATE 16 FEB 2011


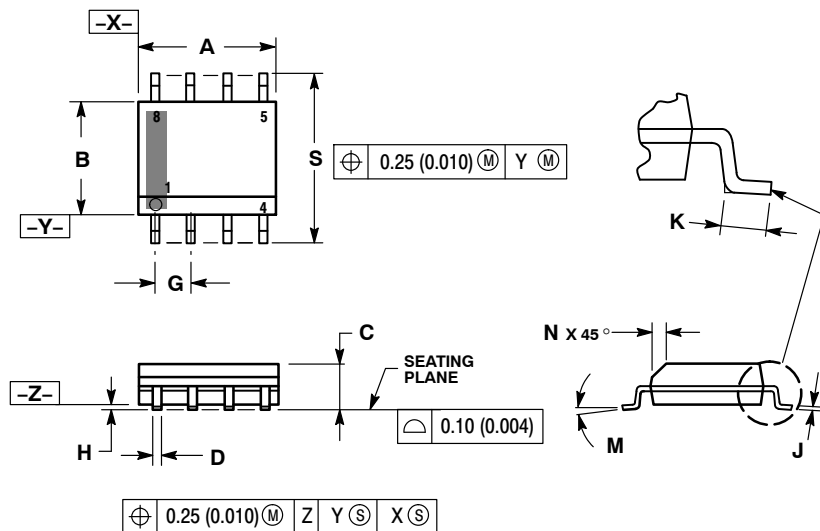


## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. 751-01 THRU 751-06 ARE OBSOLETE. NEW STANDARD IS 751-07.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 4.80        | 5.00 | 0.189     | 0.197 |
| B   | 3.80        | 4.00 | 0.150     | 0.157 |
| C   | 1.35        | 1.75 | 0.053     | 0.069 |
| D   | 0.33        | 0.51 | 0.013     | 0.020 |
| G   | 1.27 BSC    |      | 0.050 BSC |       |
| H   | 0.10        | 0.25 | 0.004     | 0.010 |
| J   | 0.19        | 0.25 | 0.007     | 0.010 |
| K   | 0.40        | 1.27 | 0.016     | 0.050 |
| M   | 0°          | 8°   | 0°        | 8°    |
| N   | 0.25        | 0.50 | 0.010     | 0.020 |
| S   | 5.80        | 6.20 | 0.228     | 0.244 |

## GENERIC MARKING DIAGRAM\*

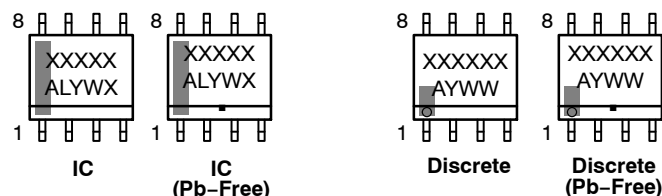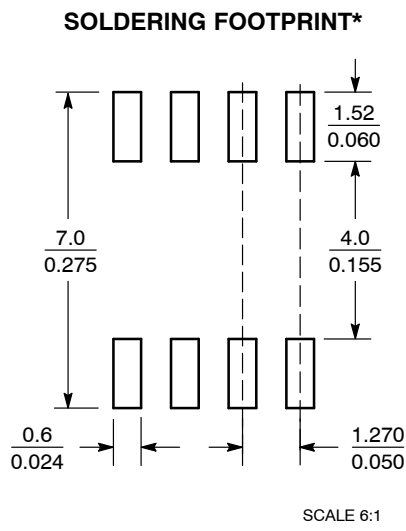

XXXXXX = Specific Device Code  
A = Assembly Location  
L = Wafer Lot  
Y = Year  
W = Work Week  
■ = Pb-Free Package

XXXXXX = Specific Device Code  
A = Assembly Location  
Y = Year  
WW = Work Week  
■ = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## STYLES ON PAGE 2

|                  |             |                                                                                                                                                                                  |
|------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB42564B | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | SOIC-8 NB   | PAGE 1 OF 2                                                                                                                                                                      |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**SOIC-8 NB**  
**CASE 751-07**  
**ISSUE AK**

DATE 16 FEB 2011

|                                                                                                                                                                                                   |                                                                                                                                                                                          |                                                                                                                                                                                    |                                                                                                                                                                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>STYLE 1:</b><br>PIN 1. EMITTER<br>2. COLLECTOR<br>3. COLLECTOR<br>4. EMITTER<br>5. EMITTER<br>6. BASE<br>7. BASE<br>8. EMITTER                                                                 | <b>STYLE 2:</b><br>PIN 1. COLLECTOR, DIE, #1<br>2. COLLECTOR, #1<br>3. COLLECTOR, #2<br>4. COLLECTOR, #2<br>5. BASE, #2<br>6. EMITTER, #2<br>7. BASE, #1<br>8. EMITTER, #1               | <b>STYLE 3:</b><br>PIN 1. DRAIN, DIE #1<br>2. DRAIN, #1<br>3. DRAIN, #2<br>4. DRAIN, #2<br>5. GATE, #2<br>6. SOURCE, #2<br>7. GATE, #1<br>8. SOURCE, #1                            | <b>STYLE 4:</b><br>PIN 1. ANODE<br>2. ANODE<br>3. ANODE<br>4. ANODE<br>5. ANODE<br>6. ANODE<br>7. ANODE<br>8. COMMON CATHODE                                                                           |
| <b>STYLE 5:</b><br>PIN 1. DRAIN<br>2. DRAIN<br>3. DRAIN<br>4. DRAIN<br>5. GATE<br>6. GATE<br>7. SOURCE<br>8. SOURCE                                                                               | <b>STYLE 6:</b><br>PIN 1. SOURCE<br>2. DRAIN<br>3. DRAIN<br>4. SOURCE<br>5. SOURCE<br>6. GATE<br>7. GATE<br>8. SOURCE                                                                    | <b>STYLE 7:</b><br>PIN 1. INPUT<br>2. EXTERNAL BYPASS<br>3. THIRD STAGE SOURCE<br>4. GROUND<br>5. DRAIN<br>6. GATE 3<br>7. SECOND STAGE Vd<br>8. FIRST STAGE Vd                    | <b>STYLE 8:</b><br>PIN 1. COLLECTOR, DIE #1<br>2. BASE, #1<br>3. BASE, #2<br>4. COLLECTOR, #2<br>5. COLLECTOR, #2<br>6. EMITTER, #2<br>7. EMITTER, #1<br>8. COLLECTOR, #1                              |
| <b>STYLE 9:</b><br>PIN 1. EMITTER, COMMON<br>2. COLLECTOR, DIE #1<br>3. COLLECTOR, DIE #2<br>4. EMITTER, COMMON<br>5. EMITTER, COMMON<br>6. BASE, DIE #2<br>7. BASE, DIE #1<br>8. EMITTER, COMMON | <b>STYLE 10:</b><br>PIN 1. GROUND<br>2. BIAS 1<br>3. OUTPUT<br>4. GROUND<br>5. GROUND<br>6. BIAS 2<br>7. INPUT<br>8. GROUND                                                              | <b>STYLE 11:</b><br>PIN 1. SOURCE 1<br>2. GATE 1<br>3. SOURCE 2<br>4. GATE 2<br>5. DRAIN 2<br>6. DRAIN 2<br>7. DRAIN 1<br>8. DRAIN 1                                               | <b>STYLE 12:</b><br>PIN 1. SOURCE<br>2. SOURCE<br>3. SOURCE<br>4. GATE<br>5. DRAIN<br>6. DRAIN<br>7. DRAIN<br>8. DRAIN                                                                                 |
| <b>STYLE 13:</b><br>PIN 1. N.C.<br>2. SOURCE<br>3. SOURCE<br>4. GATE<br>5. DRAIN<br>6. DRAIN<br>7. DRAIN<br>8. DRAIN                                                                              | <b>STYLE 14:</b><br>PIN 1. N-SOURCE<br>2. N-GATE<br>3. P-SOURCE<br>4. P-GATE<br>5. P-DRAIN<br>6. P-DRAIN<br>7. N-DRAIN<br>8. N-DRAIN                                                     | <b>STYLE 15:</b><br>PIN 1. ANODE 1<br>2. ANODE 1<br>3. ANODE 1<br>4. ANODE 1<br>5. CATHODE, COMMON<br>6. CATHODE, COMMON<br>7. CATHODE, COMMON<br>8. CATHODE, COMMON               | <b>STYLE 16:</b><br>PIN 1. EMITTER, DIE #1<br>2. BASE, DIE #1<br>3. EMITTER, DIE #2<br>4. BASE, DIE #2<br>5. COLLECTOR, DIE #2<br>6. COLLECTOR, DIE #2<br>7. COLLECTOR, DIE #1<br>8. COLLECTOR, DIE #1 |
| <b>STYLE 17:</b><br>PIN 1. VCC<br>2. V2OUT<br>3. V1OUT<br>4. TXE<br>5. RXE<br>6. VEE<br>7. GND<br>8. ACC                                                                                          | <b>STYLE 18:</b><br>PIN 1. ANODE<br>2. ANODE<br>3. SOURCE<br>4. GATE<br>5. DRAIN<br>6. DRAIN<br>7. CATHODE<br>8. CATHODE                                                                 | <b>STYLE 19:</b><br>PIN 1. SOURCE 1<br>2. GATE 1<br>3. SOURCE 2<br>4. GATE 2<br>5. DRAIN 2<br>6. MIRROR 2<br>7. DRAIN 1<br>8. MIRROR 1                                             | <b>STYLE 20:</b><br>PIN 1. SOURCE (N)<br>2. GATE (N)<br>3. SOURCE (P)<br>4. GATE (P)<br>5. DRAIN<br>6. DRAIN<br>7. DRAIN<br>8. DRAIN                                                                   |
| <b>STYLE 21:</b><br>PIN 1. CATHODE 1<br>2. CATHODE 2<br>3. CATHODE 3<br>4. CATHODE 4<br>5. CATHODE 5<br>6. COMMON ANODE<br>7. COMMON ANODE<br>8. CATHODE 6                                        | <b>STYLE 22:</b><br>PIN 1. I/O LINE 1<br>2. COMMON CATHODE/VCC<br>3. COMMON CATHODE/VCC<br>4. I/O LINE 3<br>5. COMMON ANODE/GND<br>6. I/O LINE 4<br>7. I/O LINE 5<br>8. COMMON ANODE/GND | <b>STYLE 23:</b><br>PIN 1. LINE 1 IN<br>2. COMMON ANODE/GND<br>3. COMMON ANODE/GND<br>4. LINE 2 IN<br>5. LINE 2 OUT<br>6. COMMON ANODE/GND<br>7. COMMON ANODE/GND<br>8. LINE 1 OUT | <b>STYLE 24:</b><br>PIN 1. BASE<br>2. EMITTER<br>3. COLLECTOR/ANODE<br>4. COLLECTOR/ANODE<br>5. CATHODE<br>6. CATHODE<br>7. COLLECTOR/ANODE<br>8. COLLECTOR/ANODE                                      |
| <b>STYLE 25:</b><br>PIN 1. VIN<br>2. N/C<br>3. REXT<br>4. GND<br>5. IOUT<br>6. IOUT<br>7. IOUT<br>8. IOUT                                                                                         | <b>STYLE 26:</b><br>PIN 1. GND<br>2. dv/dt<br>3. ENABLE<br>4. ILIMIT<br>5. SOURCE<br>6. SOURCE<br>7. SOURCE<br>8. VCC                                                                    | <b>STYLE 27:</b><br>PIN 1. ILIMIT<br>2. OVLO<br>3. UVLO<br>4. INPUT+<br>5. SOURCE<br>6. SOURCE<br>7. SOURCE<br>8. DRAIN                                                            | <b>STYLE 28:</b><br>PIN 1. SW_TO_GND<br>2. DASIC_OFF<br>3. DASIC_SW_DET<br>4. GND<br>5. V_MON<br>6. VBULK<br>7. VBULK<br>8. VIN                                                                        |
| <b>STYLE 29:</b><br>PIN 1. BASE, DIE #1<br>2. EMITTER, #1<br>3. BASE, #2<br>4. EMITTER, #2<br>5. COLLECTOR, #2<br>6. COLLECTOR, #2<br>7. COLLECTOR, #1<br>8. COLLECTOR, #1                        | <b>STYLE 30:</b><br>PIN 1. DRAIN 1<br>2. DRAIN 1<br>3. GATE 2<br>4. SOURCE 2<br>5. SOURCE 1/DRAIN 2<br>6. SOURCE 1/DRAIN 2<br>7. SOURCE 1/DRAIN 2<br>8. GATE 1                           |                                                                                                                                                                                    |                                                                                                                                                                                                        |

|                         |                    |                                                                                                                                                                                     |
|-------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB42564B</b> | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SOIC-8 NB</b>   | <b>PAGE 2 OF 2</b>                                                                                                                                                                  |

**onsemi** and **onsemi** are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)