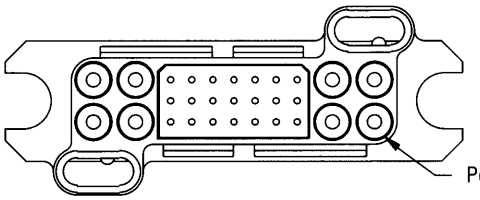
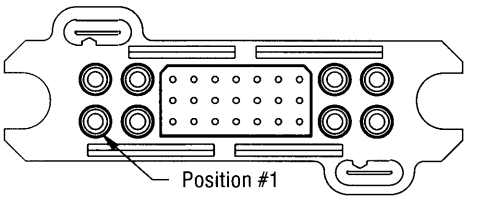
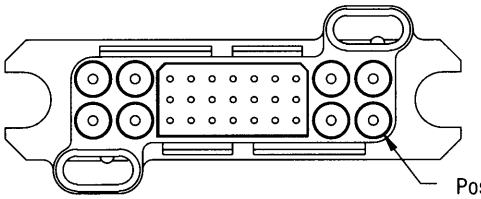
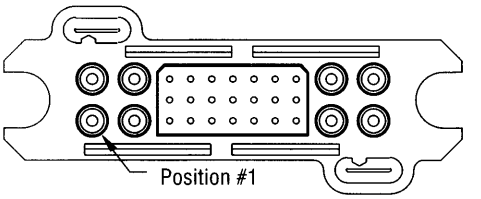
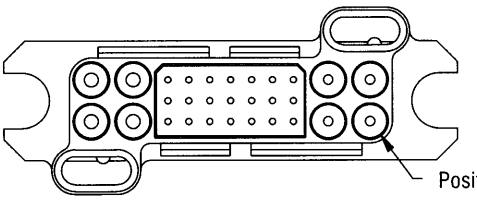
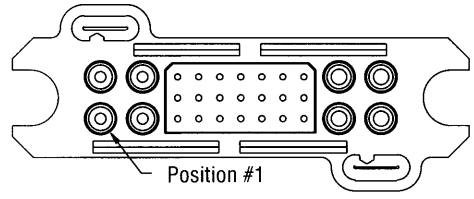
LOWER DRAWER

Dimensions	3.26" x 1.34" (82.80 x 34.03 mm)
Available contacts	Size #12/16 x 8 contacts Size #20 x 21 contacts
Current	Up to 35A per size #12 contact
True Hot Plug support	Special gold-plated size #12 contacts


Contact sequencing		Multilevel for power and signal
Housing polarization		Built in
Housing variations		See chart below.
Standard contact termination	**Size #12**	Solder cup, crimp and PCB tail
	Size #16	Solder cup, crimp and PCB tail
	Size #20	Solder cup, crimp and PCB tail

■ HOUSING VARIATIONS


Pin Contact Housing		Socket Contact Housing
 4 @ Size #12 21 @ Size #20 4 @ Size #12 **297-08-01100**	← mates with →	 4 @ Size #12 21 @ Size #20 4 @ Size #12 **298-08-01100**
 4 @ Size #16 21 @ Size #20 4 @ Size #16 **297-09-01100**	← mates with →	 4 @ Size #16 21 @ Size #20 4 @ Size #16 **298-09-01100**
 4 @ Size #12 21 @ Size #20 4 @ Size #16 **297-10-01100**	← mates with →	 4 @ Size #16 21 @ Size #20 4 @ Size #12 **298-10-01100**

■ GENERAL DIMENSIONS

The dimensions given are identical for the three housing variations available for LOWER DRAWER. Units are in inches (mm).

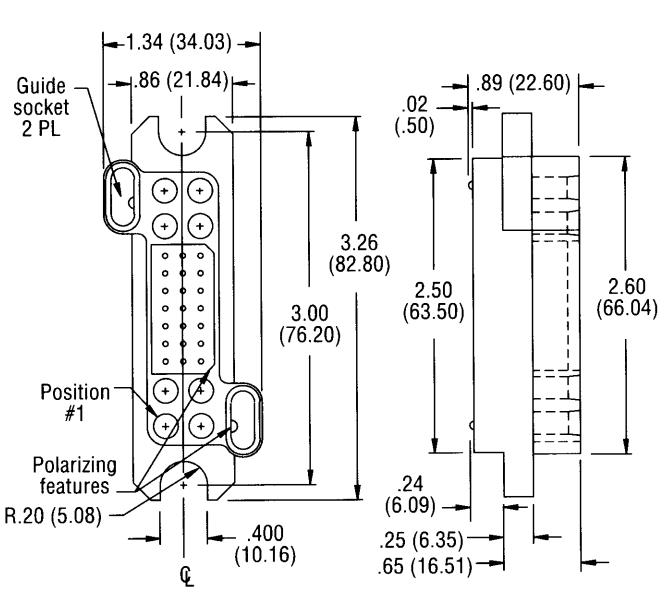

Pin Side

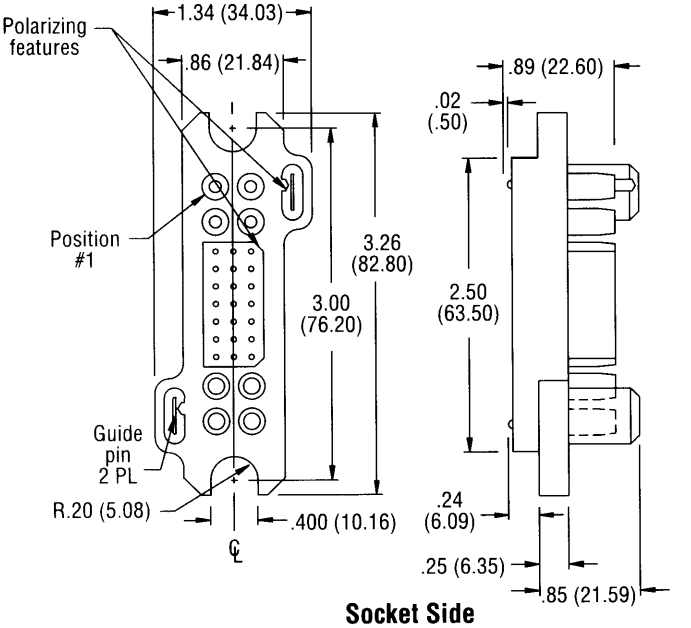

Socket Side