



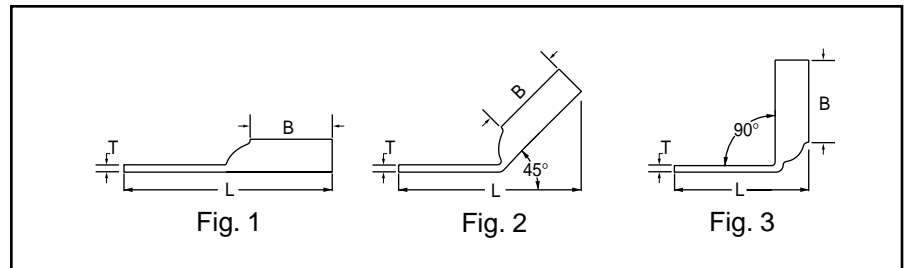

TWO HOLE HYLUG™ FLEX CONDUCTOR LONG BARREL WITH INSPECTION WINDOW

TYPE YAZ-FX

UL LISTED 90° C,
600 VOLT TO 35 KV ◆

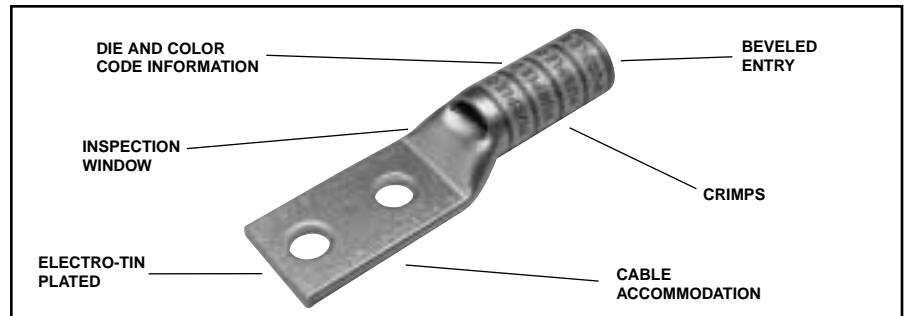


C-77

Catalog Number	Fig #	Conductor		Stud Hole Size	Stud Hole Spacing	Tongue Width	Figure Dimensions			▲ Installation Tooling					Wire Strip Length		
		AWG	MM ²				(B)	(T)	(L)	Dieless (# of crimps)	Mechanical		Hydraulic			Color Code	Die Index
											MD6, OUR840 MD7-34R	BCT500HS Y500CHS	Y35, Y39, Y750 Y46, BAT35, BAT750				
YAZ8C2TC10FX	1	#8 WELD #3 AWG	10	# 10	5/8"	.41"	.75"	.08"	2.20"	Y8MRB-1 (1) Y2MR (2) MY29-11 (2) Y1MR (2)	W8CVT (2) W8CRT (2) X8CRT (2)	W8CVT (2) W8CRT (2) X8CRT (2)	U8CRT (2)	Red	49	1"	
YAZ8C2TC10FX45	2								2.09"								
YAZ8C2TC10FX90	3								1.37"								
YAZ8C2TC10E2FX	1					2.33"											
YAZ8C2TC10E2FX45	2					2.22"											
YAZ8C2TC10E2FX90	3					1.50"											
YAZ8C2TC14E1FX	1					2.70"											
YAZ8C2TC14E1FX45	2					2.60"											
YAZ8C2TC14E1FX90	3					1.87"											
YAZ8C2TC14FX	1					2.32"											
YAZ8C2TC14FX45	2					2.20"											
YAZ8C2TC14FX90	3					1."											
YAZ8C2TC14E2FX	1					2.45"											
YAZ8C2TC14E2FX45	2					2.33"											
YAZ8C2TC14E2FX90	3					1.62"											
YAZ8C2TC38FX	1			2.89"													
YAZ8C2TC38FX45	2			2.72"													
YAZ8C2TC38FX90	3			2.05"													
YAZV6C2TC10E2FX	1	#6 WELD #6 AWG	16	# 10	3/4"	.48"	.75"	.08"	2.64"	Y2MR (2) MY29-11 (2) Y644M (1) Y1MR (2)	W5CVT (2) W5CRT (2) X5CRT (2)	W5CVT (2) W5CRT (2) X5CRT (2)	U5CRT (2)	Blue	7	1-3/16"	
YAZV6C2TC10E2FX45	2								2.48"								
YAZV6C2TC10E2FX90	3								1.51"								
YAZV6C2TC14FX	1					2.65"											
YAZV6C2TC14FX45	2					2.45"											
YAZV6C2TC14FX90	3					1.51"											
YAZV6C2TC14E2FX	1					2.78"											
YAZV6C2TC14E2FX45	2					2.58"											
YAZV6C2TC14E2FX90	3					1.63"											
YAZV6C2TC14E1FX	1					3.03"											
YAZV6C2TC14E1FX45	2					2.83"											
YAZV6C2TC14E1FX90	3					1.88"											
YAZV6C2TC38FX	1					3.22"											
YAZV6C2TC38FX45	2					2.97"											
YAZV6C2TC38FX90	3					2.06"											

* Use P-UADP-1 adaptor with "U" -dies in Y46 HYPRESS™.
 ** The MM² conductor size referenced here is for both Class 2 and Class 5 conductor.
 *** The MM² conductor size listed are the recommendations for Class 5 conductor.
 ▲ See tooling section of this catalog for complete tool and die listings. Use ONLY color-coded die recommendations for "-FX" connectors.
 ◆ For nest/indenter system contact factory.
 ◆ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions.



TWO HOLE HYLUG™ FLEX CONDUCTOR LONG BARREL WITH INSPECTION WINDOW (CONTINUED)

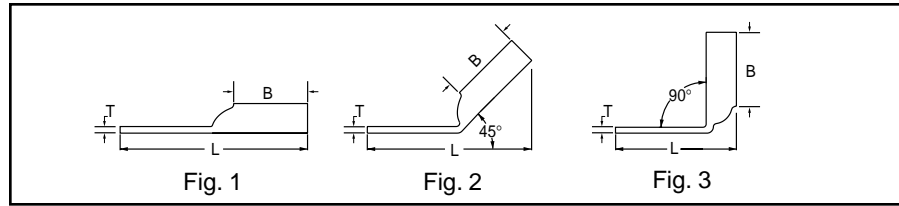

C-78

Catalog Number	Fig #	Conductor		Stud Hole Size	Stud Hole Spacing	Tongue Width	Figure Dimensions			Dieless (# of crimps)	▲ Installation Tooling					Wire Strip Length	
		AWG	*** MM ²				(B)	(T)	(L)		Mechanical		Hydraulic		Color Code		Die Index
											MD6, OUR840 MD7-34R	BCT500HS Y500CTS	Y35, Y39, Y750 Y46, BAT35, BAT750				
YAZV6C2TC38E2FX	1	61/24 #6 WELD	** 16	3/8"	3/4"	.58"	.75"	.06"	2.97"	Y1MR (2) Y2MR (2) MY29-11 (2) Y644M (1)	W5CVT (2) W5CRT (2) X5CRT (2)	W5CVT (2) W5CRT (2) X5CRT (2)	U5CRT (2)	Blue	7	1-3/16"	
YAZV6C2TC38E2FX-45	2						2.72"										
YAZV6C2TC38E2FX-90	3						1.81"										
YAZV6C2TC38E6FX	1	#6 AWG	16	3/8"	7/8"	.58"	.75"	.06"	3.09"	Y1MR (4) Y2MR (4) MY29-11 (2) Y644M (1)	W4CVT (2) W4CRT (2) X4CRT (2)	W4CVT (2) W4CRT (2) X4CRT (2)	U4CRT (2)	Gray	8	1-5/16"	
YAZV6C2TC38E6FX-45	2						2.85"										
YAZV6C2TC38E6FX-90	3						1.94"										
YAZV4C2TC38E2-FX	1	91/24-105/24	-	3/8"	3/4"	.58"	1.25"	.08"	3.14"	Y1MR (4) Y2MR (4) MY29-11 (2) Y644M (1)	W2CVT (2) W2CRT (2) X2CRT (2)	W2CVT (2) W2CRT (2) X2CRT (2)	U2CRT (2)	Brown	10	1-7/16"	
YAZV4C2TC38E2-FX-45	2						2.88"										
YAZV4C2TC38E2-FX-90	3						1.86"										
YAZV4C2TC38FX	1	#4 WELD	-	3/8"	1"	.58"	1.25"	.08"	3.39"	Y1MR (4) Y2MR (4) MY29-11 (2) Y644M (1)	W2CVT (2) W2CRT (2) X2CRT (2)	W2CVT (2) W2CRT (2) X2CRT (2)	U2CRT (2)	Brown	10	1-7/16"	
YAZV4C2TC38FX45	2						3.13"										
YAZV4C2TC38FX90	3						2.11"										
YAZV4C2TC14FX	1	#4 AWG	-	1/4"	5/8"	.55"	1.25"	.09"	2.83"	Y1MR (4) Y2MR (4) MY29-11 (2) Y644M (1)	W2CVT (2) W2CRT (2) X2CRT (2)	W2CVT (2) W2CRT (2) X2CRT (2)	U2CRT (2)	Brown	10	1-7/16"	
YAZV4C2TC14FX45	2						2.59"										
YAZV4C2TC14FX90	3						1.55"										
YAZV4C2TC14E2FX	1	#2 WELD	35	1/4"	3/4"	.68"	1.38"	.10"	2.95"	Y1MR (4) Y2MR (4) MY29-11 (2) Y644M (1)	W2CVT (2) W2CRT (2) X2CRT (2)	W2CVT (2) W2CRT (2) X2CRT (2)	U2CRT (2)	Brown	10	1-7/16"	
YAZV4C2TC14E2FX45	2						2.72"										
YAZV4C2TC14E2FX90	3						1.68"										
YAZV2C2TC14FX	1	125/24-150/24	-	1/4"	5/8"	.68"	1.38"	.10"	3.01"	Y1MR (4) Y2MR (4) MY29-11 (2) Y644M (1)	W2CVT (2) W2CRT (2) X2CRT (2)	W2CVT (2) W2CRT (2) X2CRT (2)	U2CRT (2)	Brown	10	1-7/16"	
YAZV2C2TC14FX45	2						2.75"										
YAZV2C2TC14FX90	3						1.60"										
YAZV2C2TC14E2FX	1	#2 AWG	35	1/4"	3/4"	.68"	1.38"	.10"	3.13"	Y1MR (4) Y2MR (4) MY29-11 (2) Y644M (1)	W2CVT (2) W2CRT (2) X2CRT (2)	W2CVT (2) W2CRT (2) X2CRT (2)	U2CRT (2)	Brown	10	1-7/16"	
YAZV2C2TC14E2FX45	2						2.87"										
YAZV2C2TC14E2FX90	3						1.73"										
YAZV2C2TC38FX	1	#2 AWG	35	3/8"	1"	.68"	1.38"	.10"	3.57"	Y1MR (4) Y2MR (4) MY29-11 (2) Y644M (1)	W2CVT (2) W2CRT (2) X2CRT (2)	W2CVT (2) W2CRT (2) X2CRT (2)	U2CRT (2)	Brown	10	1-7/16"	
YAZV2C2TC38FX45	2						3.31"										
YAZV2C2TC38FX90	3						2.16"										
YAZV2C2NTCFX	1	#2 AWG	35	1/2"	1-3/4"	.83"	1.38"	.10"	4.76"	Y1MR (4) Y2MR (4) MY29-11 (2) Y644M (1)	W2CVT (2) W2CRT (2) X2CRT (2)	W2CVT (2) W2CRT (2) X2CRT (2)	U2CRT (2)	Brown	10	1-7/16"	
YAZV2C2NTCFX45	2						4.50"										
YAZV2C2NTCFX90	3						3.35"										
YAZV1C2TC14FX	1	175/24-225/24	-	1/4"	5/8"	.75"	1.38"	.12"	3.04"	MY29-11 (2) Y644M (1)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	U1CRT-1 (2)	Green	11	1-7/16"	
YAZV1C2TC14FX45	2						2.81"										
YAZV1C2TC14FX90	3						1.64"										
YAZV1C2TC14E1FX	1	#1 WELD	-	1/4"	1"	.75"	1.38"	.12"	3.41"	MY29-11 (2) Y644M (1)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	U1CRT-1 (2)	Green	11	1-7/16"	
YAZV1C2TC14E1FX45	2						3.18"										
YAZV1C2TC14E1FX90	3						2.01"										
YAZV1C2TC14E2FX	1	#1 AWG	-	1/4"	3/4"	.75"	1.38"	.12"	3.16"	MY29-11 (2) Y644M (1)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	U1CRT-1 (2)	Green	11	1-7/16"	
YAZV1C2TC14E2FX45	2						2.93"										
YAZV1C2TC14E2FX90	3						1.76"										
YAZV1C2TC38FX	1	#1 AWG	-	3/8"	1"	.75"	1.38"	.12"	3.60"	MY29-11 (2) Y644M (1)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	U1CRT-1 (2)	Green	11	1-7/16"	
YAZV1C2TC38FX45	2						3.37"										
YAZV1C2TC38FX90	3						2.20"										
YAZV1C2TC516E6FX	1	5/16"	7/8"	7/8"	7/8"	.75"	1.38"	.12"	3.35"	MY29-11 (2) Y644M (1)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	U1CRT-1 (2)	Green	11	1-7/16"	
YAZV1C2TC516E6FX-45	2						3.12"										
YAZV1C2TC516E6FX-90	3						1.95"										
YAZV1C2TC516FX	1	5/16"	1"	7/8"	7/8"	.75"	1.38"	.12"	3.47"	MY29-11 (2) Y644M (1)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	U1CRT-1 (2)	Green	11	1-7/16"	
YAZV1C2TC516FX45	2						3.24"										
YAZV1C2TC516FX90	3						2.08"										

* Use P-UADP-1 adaptor with "U" -dies in Y46 HYPRESS™

** The MM² conductor size referenced here is for both Class 2 and Class 5 conductor.


*** The MM² conductor sizes listed are the recommendations for Class 5 conductor.

▲ See tooling section of this catalog for complete tool and die listings. Use ONLY color-coded die recommendations for *-FX* connectors. For nest/indenter system contact factory.

◆ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions.



TWO HOLE HYLUG™ FLEX CONDUCTOR LONG BARREL WITH INSPECTION WINDOW (CONTINUED)

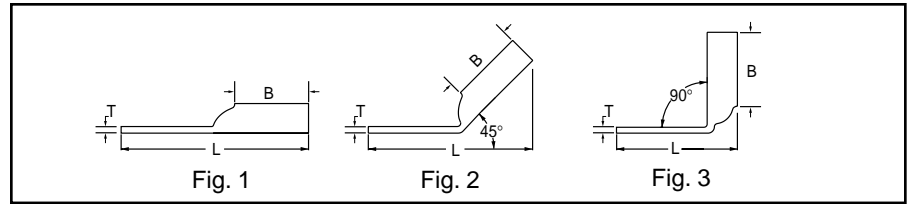


Catalog Number	Fig #	Conductor		Stud Hole Size	Stud Hole Spacing	Tongue Width	Figure Dimensions			Dieless (# of crimps)	▲ Installation Tooling					Wire Strip Length																											
		AWG	MM ²				(B)	(T)	(L)		Mechanical		Hydraulic		Color Code		Die Index																										
											MD6, OUR840 MD7-34R	BCT500HS Y500CTHS	Y35, Y39, Y750 Y46, BAT35, BAT750																														
YAZV252TC14FX	1	275/24 1/0 WELD 50	50	1/4"	5/8"	.83"	1.50"	.12"	3.20"	MY29-11 (2) Y644M (1)	W25VT (4) W25RT (4) X25RT (4)	W25VT (4) W25RT (4) X25RT (4)	U25RT (2)	Pink	12	1-9/16"																											
YAZV252TC14FX45	2						1.50"	.12"	2.92"																																		
YAZV252TC14FX90	3						1.50"	.12"	1.66"																																		
YAZV252TC14E2FX	1			1/0 AWG	50	1/4"	3/4"	.83"	1.50"								.12"	3.32"	MY29-11 (2) Y644M (1)	W25VT (4) W25RT (4) X25RT (4)	W25VT (4) W25RT (4) X25RT (4)	U25RT (2)	Pink	12	1-9/16"																		
YAZV252TC14E2FX45	2								1.50"								.12"	3.04"																									
YAZV252TC14E2FX90	3								1.50"								.12"	1.79"																									
YAZV252TC38FX	1					2/0 WELD 70	70	3/8"	1"								.83"	1.50"								.12"	3.76"	MY29-11 (2) Y644M (1)	W26VT (4) W26RT (4) X26RT (4)	W26VT (4) W26RT (4) X26RT (4)	U26RT (2)	Black	13	1-9/16"									
YAZV252TC38FX45	2																	1.50"								.12"	3.48"																
YAZV252TC38FX90	3																	1.50"								.12"	2.23"																
YAZV252NTCFX	1							2/0 AWG	70								1/2"	1-3/4"								.83"	1.50"								.12"	4.95"	MY29-11 (2) Y644M (1)	W26VT (4) W26RT (4) X26RT (4)	W26VT (4) W26RT (4) X26RT (4)	U26RT (2)	Black	13	1-9/16"
YAZV252NTCFX45	2																										1.50"								.12"	4.67"							
YAZV252NTCFX90	3																										1.50"								.12"	3.41"							
YAZV262TC14FX	1	325/24 2/0 WELD 70	70							1/4"	5/8"	.93"	1.50"	.13"	3.20"	MY29-11 (2) Y644M (1)	W26VT (4) W26RT (4) X26RT (4)	W26VT (4) W26RT (4) X26RT (4)								U26RT (2)	Black								13	1-9/16"							
YAZV262TC14FX45	2												1.50"	.13"	2.92"																												
YAZV262TC14FX90	3												1.50"	.13"	1.66"																												
YAZV262TC14E2FX	1			2/0 AWG	70					1/4"	3/4"	.93"	1.50"	.13"	3.32"				MY29-11 (2) Y644M (1)	W26VT (4) W26RT (4) X26RT (4)	W26VT (4) W26RT (4) X26RT (4)	U26RT (2)	Black	13	1-9/16"																		
YAZV262TC14E2FX45	2												1.50"	.13"	3.05"																												
YAZV262TC14E2FX90	3												1.50"	.13"	1.79"																												
YAZV262TC38FX	1					3/0 WELD 95	95			3/8"	1"	.93"	1.50"	.13"	3.76"													MY29-11 (2) Y644M (1)	W27VT (4) W27RT (4) X27RT (4)	W27VT (4) W27RT (4) X27RT (4)	U27RT (2)	Orange	14	1-9/16"									
YAZV262TC38FX45	2												1.50"	.13"	3.48"																												
YAZV262TC38FX90	3												1.50"	.13"	2.23"																												
YAZV262NTCFX	1							3/0 AWG	95	1/2"	1-3/4"	.93"	1.50"	.13"	4.95"																						MY29-11 (2) Y644M (1)	W27VT (4) W27RT (4) X27RT (4)	W27VT (4) W27RT (4) X27RT (4)	U27RT (2)	Orange	14	1-9/16"
YAZV262NTCFX45	2												1.50"	.13"	4.67"																												
YAZV262NTCFX90	3												1.50"	.13"	3.41"																												
YAZV272TC14E2FX	1	450/24 3/0 WELD 95	95							1/4"	3/4"	1.03"	1.50"	.14"	3.36"	MY29-11 (2) Y644M (1)	W27VT (4) W27RT (4) X27RT (4)	W27VT (4) W27RT (4) X27RT (4)								U27RT (2)	Orange								14	1-9/16"							
YAZV272TC14E2FX-45	2												1.50"	.14"	3.08"																												
YAZV272TC14E2FX-90	3												1.50"	.14"	1.82"																												
YAZV272TC38FX	1			3/0 AWG	95					3/8"	1"	1.03"	1.50"	.14"	3.80"				MY29-11 (2) Y644M (1)	W27VT (4) W27RT (4) X27RT (4)	W27VT (4) W27RT (4) X27RT (4)	U27RT (2)	Orange	14	1-9/16"																		
YAZV272TC38FX45	2												1.50"	.14"	3.52"																												
YAZV272TC38FX90	3												1.50"	.14"	2.25"																												
YAZV272TC38FX	1					4/0 WELD 120	120			1/4"	3/4"	1.14"	1.62"	.15"	3.52"													MY29-11 (2) Y644M (1)	W28VT (4) W28RT (4) X28RT (6)	W28VT (4) W28RT (4) X28RT (6)	U28RT (2)	Purple	15	1-11/16"									
YAZV272TC38FX45	2												1.62"	.15"	3.23"																												
YAZV272TC38FX90	3												1.62"	.15"	1.86"																												
YAZV282TC14E2FX	1							550/24 4/0 WELD 120	120	3/8"	1"	.94"	1.62"	.15"	3.96"																						MY29-11 (2) Y644M (1)	W28VT (4) W28RT (4) X28RT (6)	W28VT (4) W28RT (4) X28RT (6)	U28RT (2)	Purple	15	1-11/16"
YAZV282TC14E2FX45	2												1.62"	.15"	3.67"																												
YAZV282TC14E2FX90	3												1.62"	.15"	2.30"																												
YAZV282NT38FX	1	4/0 AWG	120							3/8"	1"	1.14"	1.62"	.15"	3.96"	MY29-11 (2) Y644M (1)	W28VT (4) W28RT (4) X28RT (6)	W28VT (4) W28RT (4) X28RT (6)								U28RT (2)	Purple								15	1-11/16"							
YAZV282NT38FX-45	2												1.62"	.15"	3.67"																												
YAZV282NT38FX-90	3												1.62"	.15"	2.30"																												
YAZV282TC38FX	1			4/0 WELD	120					3/8"	1"	1.14"	1.62"	.15"	3.96"				MY29-11 (2) Y644M (1)	W28VT (4) W28RT (4) X28RT (6)	W28VT (4) W28RT (4) X28RT (6)	U28RT (2)	Purple	15	1-11/16"																		
YAZV282TC38FX45	2												1.62"	.15"	3.67"																												
YAZV282TC38FX90	3												1.62"	.15"	2.30"																												
YAZV282NTCFX	1					4/0 AWG	120			1/2"	1-3/4"	1.14"	1.62"	.15"	4.93"													MY29-11 (2) Y644M (1)	W28VT (4) W28RT (4) X28RT (6)	W28VT (4) W28RT (4) X28RT (6)	U28RT (2)	Purple	15	1-11/16"									
YAZV282NTCFX45	2												1.62"	.15"	4.64"																												
YAZV282NTCFX90	3												1.62"	.15"	3.27"																												
YAZV292NT516FX	1							550/24 4/0 WELD	-	5/16"	1-3/4"	1.20"	2.00"	.16"	4.62"																						Y644M (1)	W29VT (4) X29RT (8)	W29RT (4) W29VT (4) X29RT (8)	U29RT (2)	Yellow	16	1-11/16"
YAZV292NT516FX-45	2												2.00"	.16"	4.35"																												
YAZV292NT516FX-90	3												2.00"	.16"	2.96"																												

C-79

* Use P-UADP-1 adaptor with "U" -dies in Y46 HYPRESS™.
 ** The MM² conductor size referenced here is for both Class 2 and Class 5 conductor.
 *** The MM² conductor sizes listed are the recommendations for Class 5 conductor.
 ▲ See tooling section of this catalog for complete tool and die listings. Use ONLY color-coded die recommendations for "-FX" connectors. For nest/indentor system contact factory.
 ◆ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions.



TWO HOLE HYLUG™ FLEX CONDUCTOR LONG BARREL WITH INSPECTION WINDOW (CONTINUED)

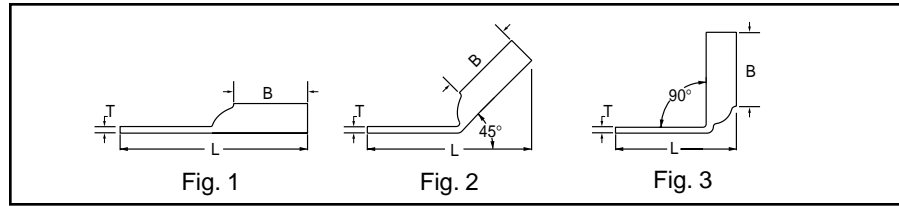

C-80

Catalog Number	Fig #	Conductor		Stud Hole Size	Stud Hole Spacing	Tongue Width	Figure Dimensions			Dieless (# of crimps)	▲ Installation Tooling					Wire Strip Length							
		AWG	*** MM ²				(B)	(T)	(L)		Mechanical		Hydraulic		Color Code		Die Index						
											MD6, OUR840 MD7-34R	BCT500HS Y500CTHS	Y35, Y39, Y750 Y46, BAT35, BAT750										
YAZ302TC38FX	1	250 FLEX		3/8"	1"	1.20"	2.00"	.16"	4.42"	Y644M (1)													
YAZ302TC38FX-45	2	CLASS G 259 STR.							4.05"		W29VT (4)	W29RT (4)	U29RT (2)	Yellow	16	2-1/16"							
YAZ302TC38FX-90	3	CLASS H 427 STR.							2.37"		X29RT (8)	X29RT (8)											
YAZ312TC38FX	1	250 FLEX 637/24 CLASS I, K, M	150	3/8"	1"	1.28"	2.00"	.18"	4.45"	Y644M (1)	W30VT (4)	W30VT (4) W30RT (4)	U30RT (4)	White	17	2-1/16"							
YAZ312TC38FX45	2								4.10"														
YAZ312TC38FX90	3								2.41"														
YAZ312TC14E2FX	1			1/4"	3/4"	1.29"	2.00"	.18"	4.02"														
YAZ312TC14E2FX-45	2								3.66"														
YAZ312TC14E2FX-90	3								1.97"														
YAZ322TC38FX	1	775/24 313.1 kcmil	185	3/8"	1"	1.55"	2.12"	.19"	4.62"	Y644M (1)	W31VT (4)	W31VT (4) W31RT (4)	U31RT (4)	Red	18	2-3/16"							
YAZ322TC38FX45	2								4.25"														
YAZ322TC38FX90	3								2.46"														
YAZ342TC14E2FX	1	373.3 kcmil 925/24 (350 MCM NOM)	240	1/4"	3/4"	1.55"	2.25"	.23"	4.42"								Y644M (1)	W32VT (4)	W32VT (4) W32RT (4)	U32RT (4)	Blue	19	2-5/16"
YAZ342TC14E2FX-45	2								4.06"														
YAZ342TC14E2FX-90	3								2.10"														
YAZ342NT38FX	1			3/8"	1"	.96"	2.25"	.23"	4.85"														
YAZ342NT38FX-45	2								4.50"														
YAZ342NT38FX-90	3								2.54"														
YAZ342TC38FX	1								3/8"	1"	1.55"	2.25"	.23"	4.85"									
YAZ342TC38FX45	2													4.50"									
YAZ342TC38FX90	3													2.54"									
YAZ342NTCFX	1			1/2"	1-3/4"	1.55"	2.25"	.23"	6.04"														
YAZ342NTCFX45	2								5.69"														
YAZ342NTCFX90	3								3.73"														
YAZ362TC38FX	1	1100/24 444.4 kcmil	-	3/8"	1"	1.72"	2.69"	.27"	5.55"	Y644M (1)	-	-	U34RT (4)	Brown	20	2-3/4"							
YAZ362TC38FX45	2								5.14"														
YAZ362TC38FX90	3								2.81"														
YAZ382NT38FX	1	535.3 kcmil 1325/24 (500 MCM NOM)	300	3/8"	1"	1.63"	2.81"	.27"	5.72"								Y644M (1)	-	-	U38XRT (4)	Pink	L99	2-7/8"
YAZ382NT38FX-45	2								5.26"														
YAZ382NT38FX-90	3								2.84"														
YAZ382TC38FX	1			3/8"	1"	1.81"	2.81"	.27"	5.72"														
YAZ382TC38FX45	2								5.26"														
YAZ382TC38FX90	3								2.84"														
YAZ382NNTFX	1								1/2"	1-3/4"	1.63"	2.81"	.27"	6.72"									
YAZ382NNTFX-45	2													6.26"									
YAZ382NNTFX-90	3													3.84"									
YAZ382NTCFX	1			1/2"	1-3/4"	1.81"	2.81"	.27"	6.72"														
YAZ382NTCFX45	2								6.26"														
YAZ382NTCFX90	3								3.84"														

* Use P-UADP-1 adaptor with "U" -dies in Y46 HYPRESS™.

*** The MM² conductor sizes listed are the recommendations for Class 5 conductor.

▲ See tooling section of this catalog for complete tool and die listings. Use ONLY color-coded die recommendations for "-FX" connectors. For nest/indenter system contact factory.

◆ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions.