Ordering number : ENA2127

STK621-033N-E

ON Semiconductor®

http://onsemi.com

Thick-Film Hybrid IC

3-Phase Motor Drive Inverter Hybrid IC

Overview

This IC is a 3-phase inverter power hybrid IC containing power elements (IGBT and FRD), pre-driver, as well as protection circuit in one package.

Application

- 3-phase inverter motor drive

Features

- Integrates power elements (IGBT and FRD), pre-driver, and protective circuit.
- Protective circuits including overcurrent (bus line), pre-drive low voltage protection are built in.
- Direct input of CMOS level control signals without an insulating circuit (photocoupler, etc) is possible.
- Built-in simultaneous upper/lower ON prevention circuit to prevent arm shorting through simultaneous ON input for the upper and lower side transistors.
  (Dead time is required for preventing shorting due to switching delay.)
- The level of the overcurrent protection current is programmable with the external resistance RSD between the ISD and V_{SS} terminals. (It is necessary to connect RSD to ensure normal operation of the overcurrent protection function.
  ISD = 21A to 28A when RSD = 0Ω)
- SIP (The single in-line package) of the transfer full mold structure.

Semiconductor Components Industries, LLC, 2013

Specifications

Absolute Maximum Ratings at Tc = 25°C

Parameter	Symbol	Conditions	Ratings	unit
Supply voltage	V_{CC}	+ - –, surge < 500V *1	450	V
Collector-emitter voltage	V_{CE}	+ - U (V, W) or U (V, W) - –	600	V
Output current	I_O	+, –, U, V, W terminal current	±15	A
Output peak current	Iop	+, –, U, V, W terminal current PW = 100μs	±30	A
Pre-driver supply voltage	VD1, 2, 3, 4	VB1 - U, VB2 - V, VB3 - W, V_{DD} - V_{SS} *2	20	V
Input signal voltage	V_{IN}	HIN1, 2, 3, LIN1, 2, 3 terminal	0 to 7	V
FAULT terminal voltage	VFAULT	FAULT terminal	20	V
Maximum loss	Pd	Per 1 channel	24	W
Junction temperature	Tj	IGBT, FRD junction temperature	150	°C
Storage temperature	Tstg		-40 to +125	°C
Operating temperature	TC	H-IC case temperature	-20 to +100	°C
Tightening torque		A screw part at use M3 type screw *3	1.0	N•m
Withstand voltage	Vis	50Hz sine wave AC 1 minute *4	2000	VRMS

In the case without the instruction, the voltage standard is - terminal = V_{SS} terminal voltage.

*1 Surge voltage developed by the switching operation due to the wiring inductance between the + and – terminals.

*2 VD1 = between VB1-U, VD2 = VB2-V, VD3 = VB3-W, VB4 = V_{DD}-V_{SS}, terminal voltage.

*3 Flatness of the heat-sink should be lower than 0.15mm.

*4 The test condition is AC 2500V, 1 second.

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

Electrical Characteristics at Tc=25°C, VD=15V

Parameter	Symbol	Conditions		Test Circuit	Ratings min	Ratings typ	Ratings max	unit
Power output part								
Collector-to-emitter cut-off current	I_{CE}	V_{CE} = 600V		Fig.1			0.5	mA
Collector-to-emitter saturation voltage	V_{CE} (SAT)	I_O = 15A	Upper side	Fig.2		2.2	2.9	V
			Lower side			2.6	3.3	V
Diode forward voltage	V_F	I_O = -15A	Upper side	Fig.3		1.9	2.7	V
			Lower side			2.2	3.0	V
Junction-to-substrate thermal resistance	θj-c (T)	IGBT					5.0	°C/W
	θj-c (D)	FWD					7.3	°C/W
Control (Pre-driver) part								
Pre-drive power supply consumption electric current	I_D	VD1, 2, 3 = 15V		Fig.4		0.07	0.4	mA
		VD4 = 15V				3.5	7	mA
Input ON voltage	V_{IH}	Output ON					0.8	V
Input OFF voltage	V_{IL}	Output OFF			3.0			V
Protection part								
Over-current protection electric current	ISD	PW = 100μs, RDS = 0Ω		Fig.5	21		28	A
Pre-drive low voltage protection	UVLO				10		12	V
Fault terminal input electric current	IOSD	VFault = 0.1V				2.0		mA
Fault clearness delay time	FLTCLR	After each protection operation ending			18		80	ms
Switching time	tON	I_O = 15A, Inductive load		Fig.6		0.7		μs
	tOFF					1.2		μs
Electric current output signal level	ISO	I_O = 15A				0.45		V


In the case without the instruction, the voltage standard is - terminal = V_{SS} terminal voltage.

Notes


1. Input ON voltage indicates a value to turn on output stage IGBT.
   Input OFF voltage indicates a value to turn off output stage IGBT.
   At the time of output ON, set the input signal voltage 0V to V_{IH} (MAX).
   At the time of output OFF, set the input signal voltage V_{IL} (MIN) to 5V.
2. When the internal protection circuit operates, there is a Fault signal ON (When the Fault terminal is low level, Fault signal is ON state : output form is open DRAIN) but the Fault signal doesn't latch.
   After protection operation ends, it returns automatically within about 18ms to 80ms and resumes operation beginning condition. So, after Fault signal detection, set OFF (HIGH) to all input signals at once.
   However, the operation of pre-drive power supply low voltage protection (UVLO: it has a hysteresis about 0.3V) is as follows.
   Upper side → There is no Fault signal output, but it does a corresponding gate signal OFF.
   Incidentally, it returns to the regular operation when recovering to the normal voltage, but the latch continues among input signal ON (LOW).
   Lower side → It outputs Fault signal with gate signal OFF.
   However, it is different from the protection operation of upper side, it is automatically resets about 18ms to 80ms later and resumes operation beginning condition when recovering to normal voltage. (The protection operation doesn't latch by the input signal.)
3. When assembling the hybrid IC on the heat sink with M3 type screw, tightening torque range is 0.8N•m to 1.0N•m. Flatness of the heat-sink should be lower than 0.15mm.
4. The pre-drive low voltage protection is the feature to protect a device when the pre-driver supply voltage declines with the operating malfunction. As for the pre-driver supply voltage decline in case of operation beginning, and so on, we request confirmation in the set.

Package Dimensions

unit:mm (typ)

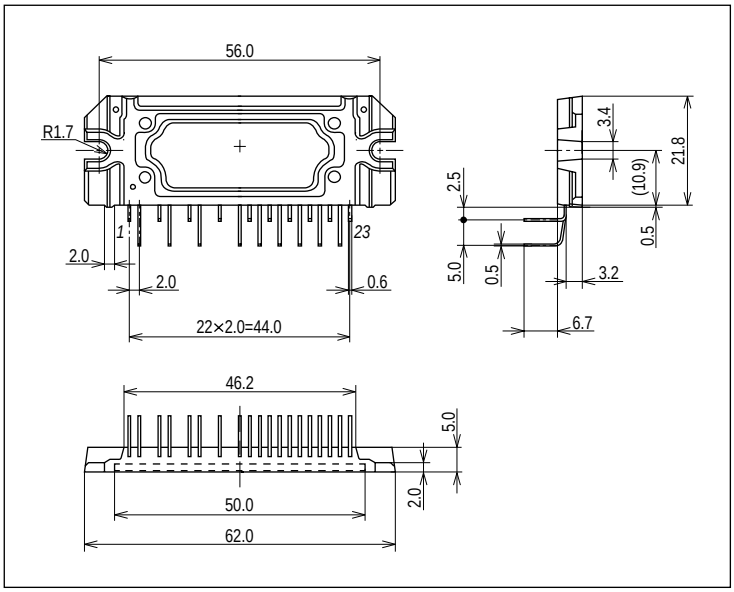

Internal Equivalent Circuit Diagram

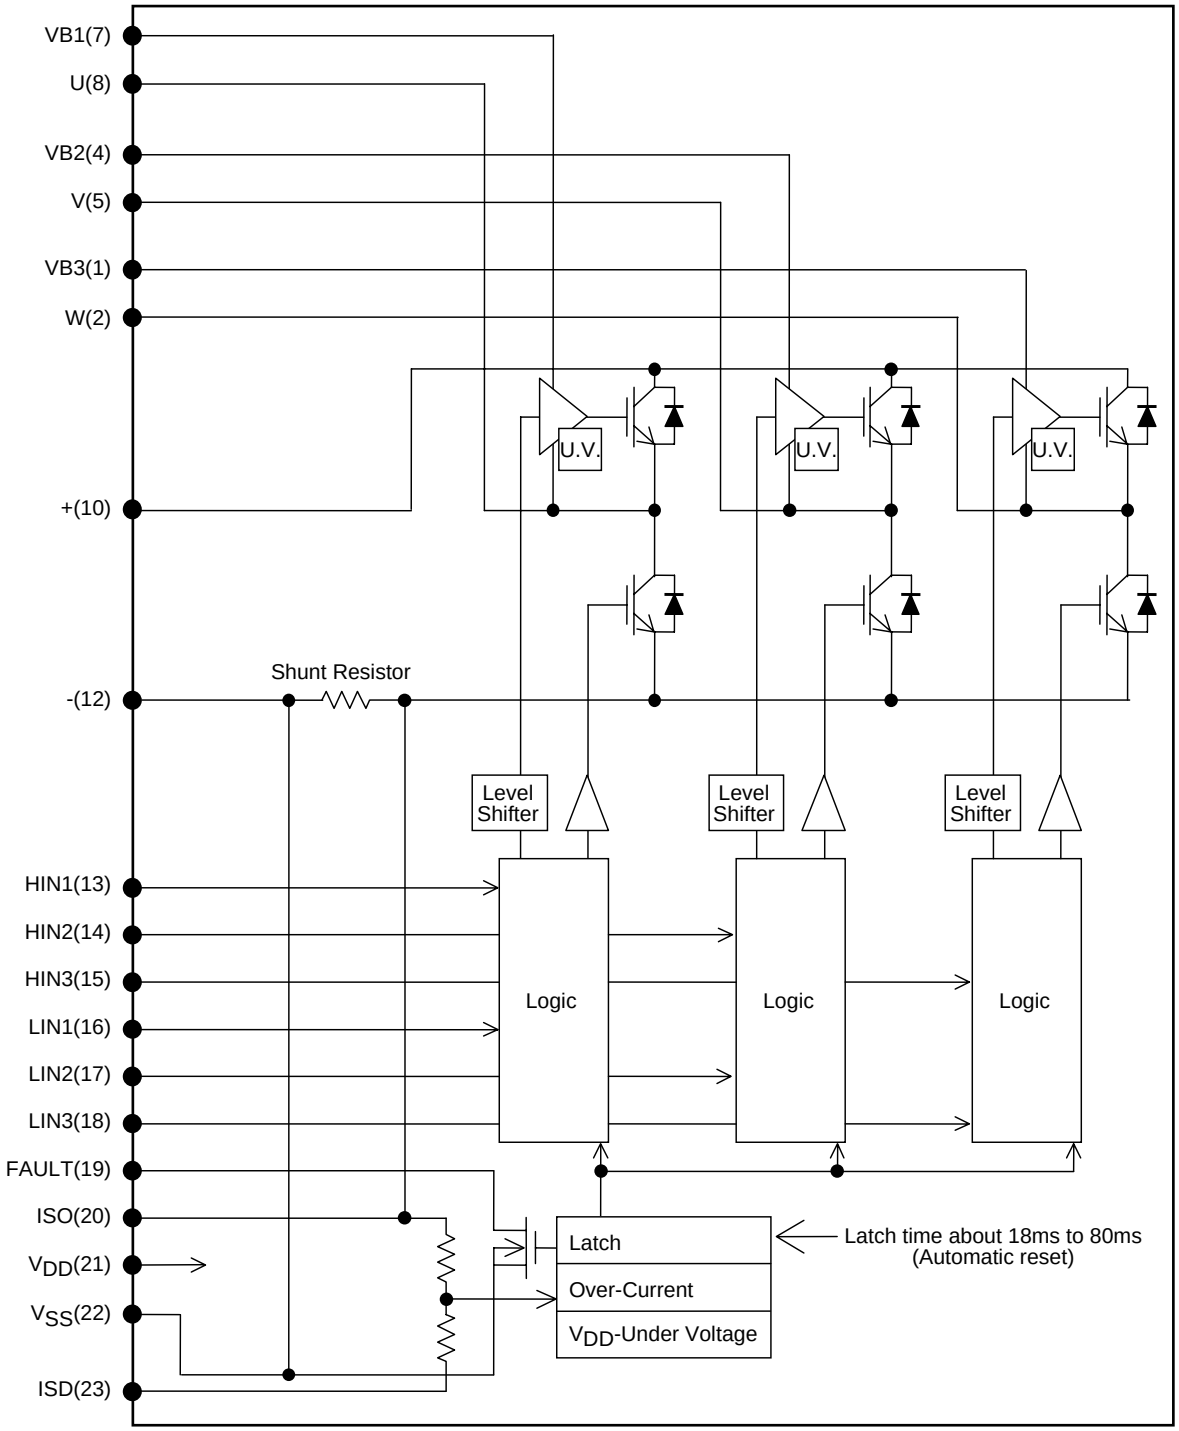

Test Circuit

(The tested phase : U+ shows the upper side of the U phase and U- shows the lower side of the U phase.)

Fig 1: I_{CE}

	U+	V+	W+	U-	V-	W-
M	10	10	10	8	5	2
N	8	5	2	12	12	12

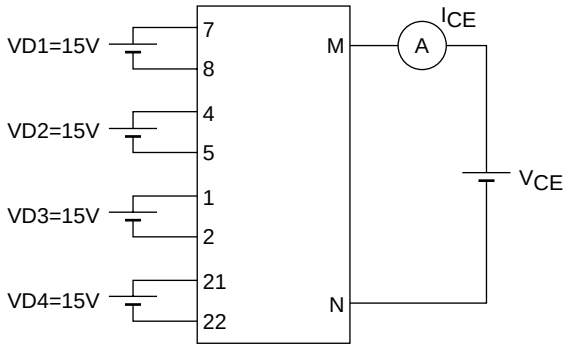


Fig 2: $V_{CE}(SAT)$

	U+	V+	W+	U-	V-	W-
M	10	10	10	8	5	2
N	8	5	2	12	12	12
m	13	14	15	16	17	18

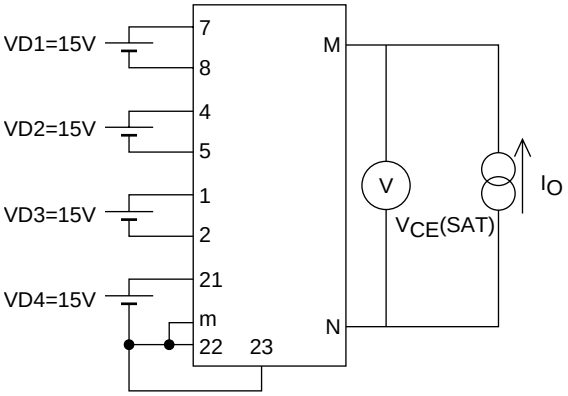


Fig 3: V_F

	U+	V+	W+	U-	V-	W-
M	10	10	10	8	5	2
N	8	5	2	12	12	12

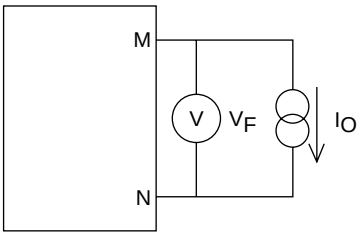


Fig 4: I_D

	VD1	VD2	VD3	VD4
m	7	4	1	21
n	8	5	2	22

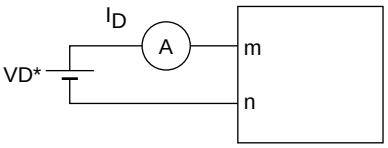


Fig 5: ISD



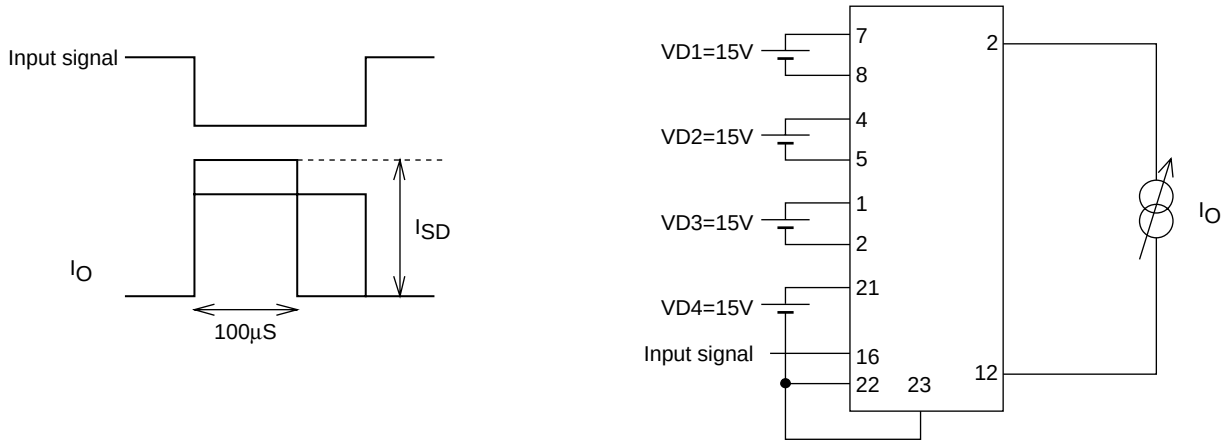


Fig 6: Switching Time

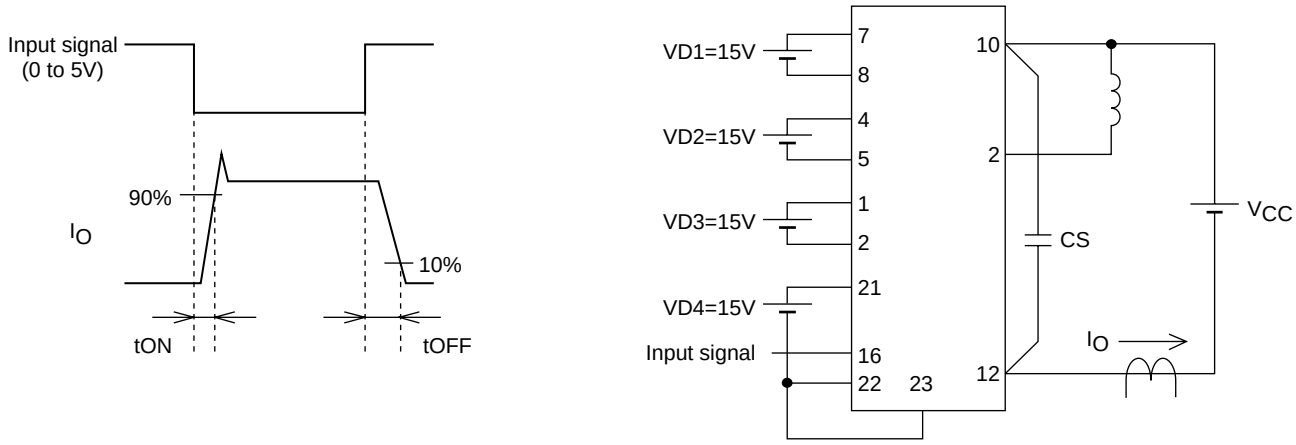

Example of the application circuit

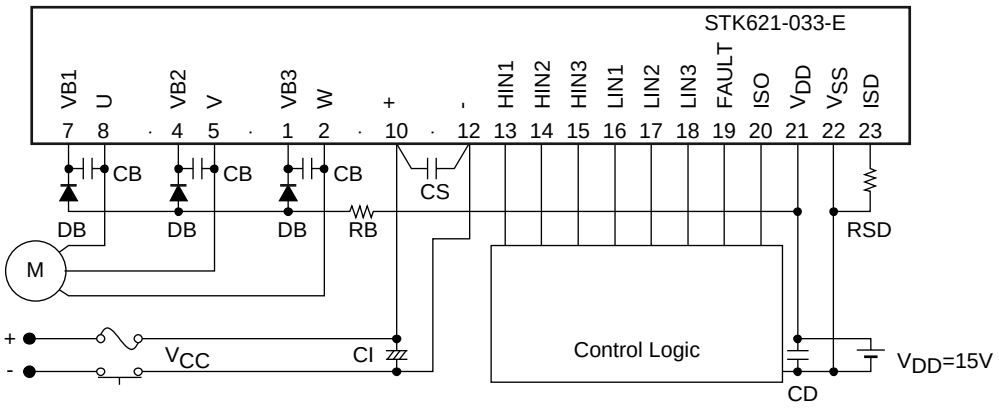

Recommendation Operating Conditions

Parameter	Symbol	Conditions	min	typ	max	unit
Supply voltage	V_{CC}	+ - –	0	280	400	V
Pre-driver supply voltage	VD1, 2, 3	VB1 - U, VB2 - V, VB3 - W	12.5	15	17.5	V
	VD4	V_{DD} - V_{SS} *1	13.5	15	16.5	
Input ON voltage	V_{IN}(ON)	HIN1, HIN2, HIN3, LIN1, LIN2, LIN3 Terminal	0		0.3	V
Input OFF voltage	V_{IN}(OFF)		3.5		5	
PWM frequency	fPWM		1		10	kHz
Dead time	DT	Upper/lower input signal downtime	2			µs
Tightening torque	MT	'M3' Type Screw	0.8		1.0	N•m

*1. Pre-driver power supply (VD4 = 15±1.5V) must have the capacity of I_O = 20mA (DC), 0.5A (Peak).

Usage Precaution

1. By the addition of the diode for the bootstrap (DB : high speed type of trr 100ns or less, withstand voltage equal to or more than 600V) and of the capacitor (CB : about 1 to 47µF), a single power supply drive is enabled. In this case, it makes a lower side IGBT ON (input signal of lower side makes LOW).
   Then it charges in CB. Incidentally, in case of start-up and so, when the voltage of CB is low, the big charging electric current flows and sometimes becomes the cause which exerts a bad influence of noise and so on. Put limitation resistor RB (Several Ω to about tens of Ω).
   (When not using the bootstrap circuit, each upper side pre-drive power supply needs an external independent power supply.)
   Also, the upper side power supply voltage sometimes declines by the way of controlling. Please confirm.

2. Because the jump voltage which is accompanied by the vibration in case of switching operation occurs by the influence of the floating inductance of the wiring of the outer power supply which is connected with of the + terminal and the – terminal, restrains and spares serge voltage being as the connection of the snubber circuit (Capacitor/CS/about 0.22 - 10µF) for the voltage absorption with the neighborhood as possible between + and the – terminal, and so on, with making a wiring length (among the terminals each from CI) short and making a wiring inductance small.

3. ISO terminal (20pin) is for the electric current monitor. When the pull up with the resistance,use above 5.6kΩ Be careful, because the overcurrent protection does not operate when short-circuiting in the ISO terminal and the V_{SS} terminal.

4. Output form of the FAULT terminal is open DRAIN (it is operating as FAULT when becoming LOW).
   When the pull up with the resistance, use above 5.6kΩ.

5. Zener diode with 5V (5.0 - 5.4V) is connected with the inside of the signal input terminal.When inputting the voltage which exceeds 5V,connect resistor to between the side of the power and the signal input terminal,for the input current of the signal input terminal become equal to or less than 0.5mA.
   This resistor is effective with the noise absorption of the signal terminal,too.

6. The overcurrent protection feature operates only when it is possible to do a circuit control normally. For the safety, put a fuse, and so on in the V_{CC} line.

7. Because the IC sometimes destroys and bursts when motor connection terminal (2pin, 5pin, 8pin) becomes open while the motor turns, especially, be careful of the connection (the soldering condition) of this terminal.

8. The over current protection feature operates normally when an external resistor RSD is connected between the ISD and Vss terminals. Be sure to connect this resistor. The Level of the overcurrent protection current is variable according to the RSD value.Select an RSD resistor of an optimum value
   while referring to the formula shown on a separate sheet and connect it between the ISD and V_{SS} terminals.

9. If - terminal and V_{SS} terminal are short-circuited, since an over-current protection (ISD) value will become lower than the inside setting value of HIC, please do not connect externally.
   (–terminal and V_{SS} terminal are connected inside HIC)

   This data shows the example of the application circuit, does not guarantee a design as the mass production set.

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.