

DATA SHEET

For a complete data sheet, please also download:

- The IC04 LOCMOS HE4000B Logic Family Specifications HEF, HEC
- The IC04 LOCMOS HE4000B Logic Package Outlines/Information HEF, HEC

HEF40161B

MSI

4-bit synchronous binary counter
with asynchronous reset

Product specification
File under Integrated Circuits, IC04

January 1995

4-bit synchronous binary counter with asynchronous reset

HEF40161B
MSI

DESCRIPTION

The HEF40161B is a fully synchronous edge-triggered 4-bit binary counter with a clock input (CP), an overriding asynchronous master reset ($\overline{MR}$), four parallel data inputs (P_0 to P_3), three synchronous mode control inputs (parallel enable ($\overline{PE}$), count enable parallel (CEP) and count enable trickle (CET)), buffered outputs from all four bit positions (O_0 to O_3) and a terminal count output (TC).

Operation is fully synchronous (except for the $\overline{MR}$ input) and occurs on the LOW to HIGH transition of CP. When $\overline{PE}$ is LOW, the next LOW to HIGH transition of CP loads data into the counter from P_0 to P_3 regardless of the levels of CEP and CET inputs.

When $\overline{PE}$ is HIGH, the next LOW to HIGH transition of CP advances the counter to its next state only if both CEP and CET are HIGH; otherwise, no change occurs in the state of the counter. TC is HIGH when the state of the counter is 15 (O_1 to O_3 = HIGH) and when CET is HIGH. A LOW on $\overline{MR}$ sets all outputs (O_0 to O_3 and TC) LOW, independent of the state of all other inputs. Multistage synchronous counting is possible without additional components by using a carry look-ahead counting technique; in this case, TC is used to enable successive cascaded stages. CEP, CET and $\overline{PE}$ must be stable only during the set-up time before the LOW to HIGH transition of CP.

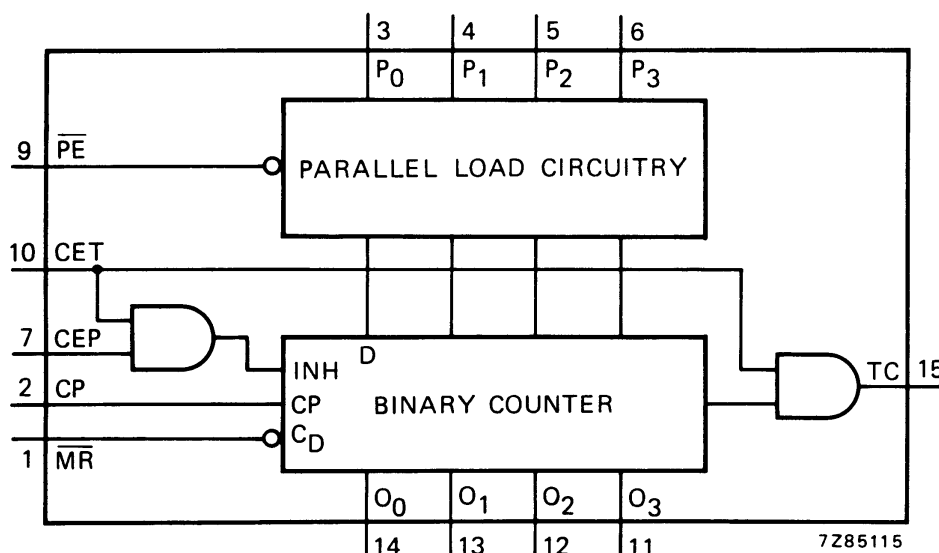



Fig.1 Functional diagram.

FAMILY DATA, I_{DD} LIMITS category MSI

See Family Specifications

4-bit synchronous binary counter with
asynchronous reset

HEF40161B
MSI

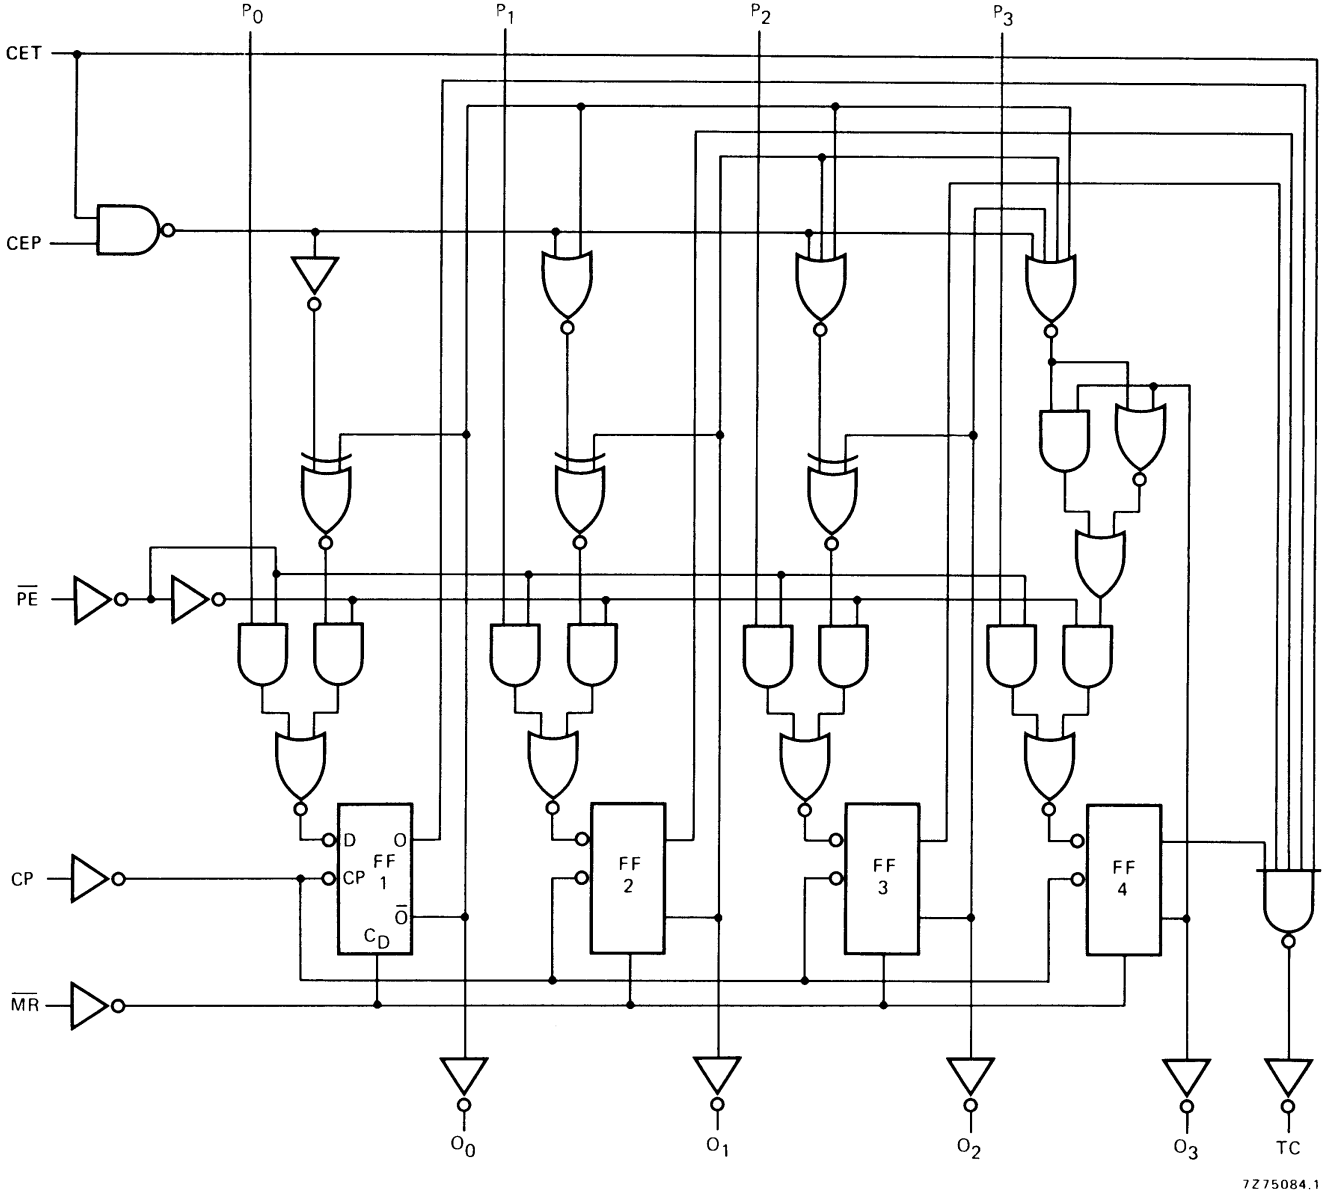


7275084.1

Fig.2 Logic diagram.

4-bit synchronous binary counter with asynchronous reset

HEF40161B
MSI

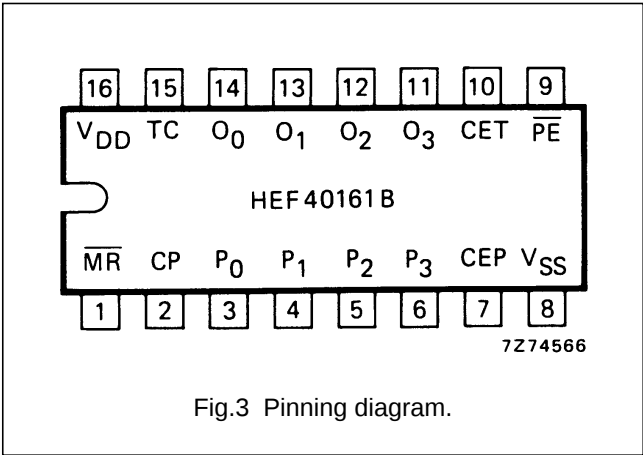

PINNING

$\overline{PE}$ parallel enable input
 P_0 to P_3 parallel data inputs
CEP count enable parallel input
CET count enable trickle input
CP clock input (LOW to HIGH, edge-triggered)
 $\overline{MR}$ master reset input (active LOW)
 O_0 to O_3 parallel outputs
TC terminal count output

HEF40161BP(N): 16-lead DIL; plastic (SOT38-1)
HEF40161BD(F): 16-lead DIL; ceramic (cerdip) (SOT74)
HEF40161BT(D): 16-lead SO; plastic (SOT109-1)
(): Package Designator North America

SYNCHRONOUS MODE SELECTION

$\overline{PE}$	CEP	CET	MODE
L	X	X	preset
H	L	X	no change
H	X	L	no change
H	H	H	count

Notes


- $\overline{MR}$ = HIGH
- H = HIGH state (the more positive voltage)
- L = LOW state (the less positive voltage)
- X = state is immaterial

TERMINAL COUNT GENERATION

CET	$(O_0 \cdot O_1 \cdot O_2 \cdot O_3)$	TC
L	L	L
L	H	L
H	L	L
H	H	H

Note

- $TC = CET \cdot O_0 \cdot O_1 \cdot O_2 \cdot O_3$

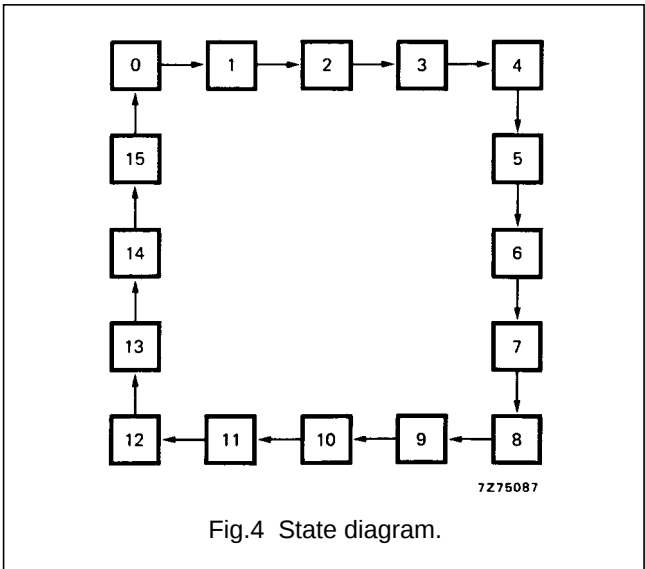

4-bit synchronous binary counter with asynchronous reset

HEF40161B MSI

AC CHARACTERISTICS

$V_{SS} = 0$ V; $T_{amb} = 25$ °C; input transition times ≤ 20 ns

	V_{DD} V	TYPICAL FORMULA FOR P (μ W)	
Dynamic power dissipation per package (P)	5 10 15	$1\,200 f_i + \sum (f_o C_L) \times V_{DD}^2$ $5\,600 f_i + \sum (f_o C_L) \times V_{DD}^2$ $16\,000 f_i + \sum (f_o C_L) \times V_{DD}^2$	where f_i = input freq. (MHz) f_o = output freq. (MHz) C_L = load capacitance (pF) $\sum (f_o C_L)$ = sum of outputs V_{DD} = supply voltage (V)

AC CHARACTERISTICS

$V_{SS} = 0$ V; $T_{amb} = 25$ °C; $C_L = 50$ pF; input transition times ≤ 20 ns

	V_{DD} V	SYMBOL	MIN.	TYP.	MAX.	TYPICAL EXTRAPOLATION FORMULA
Propagation delays CP $\rightarrow$ O _n HIGH to LOW	5 10 15	t_{PHL}		110 45 30	220 90 60 ns	$83\text{ ns} + (0,55\text{ ns/pF}) C_L$ $34\text{ ns} + (0,23\text{ ns/pF}) C_L$ $22\text{ ns} + (0,16\text{ ns/pF}) C_L$
LOW to HIGH	5 10 15	t_{PLH}		115 45 35	230 95 65 ns	$88\text{ ns} + (0,55\text{ ns/pF}) C_L$ $34\text{ ns} + (0,23\text{ ns/pF}) C_L$ $27\text{ ns} + (0,16\text{ ns/pF}) C_L$
CP $\rightarrow$ TC HIGH to LOW	5 10 15	t_{PHL}		130 55 35	260 105 75 ns	$103\text{ ns} + (0,55\text{ ns/pF}) C_L$ $44\text{ ns} + (0,23\text{ ns/pF}) C_L$ $27\text{ ns} + (0,16\text{ ns/pF}) C_L$
LOW to HIGH	5 10 15	t_{PLH}		140 55 40	280 115 80 ns	$113\text{ ns} + (0,55\text{ ns/pF}) C_L$ $44\text{ ns} + (0,23\text{ ns/pF}) C_L$ $32\text{ ns} + (0,16\text{ ns/pF}) C_L$
CET $\rightarrow$ TC HIGH to LOW	5 10 15	t_{PHL}		105 50 35	210 100 75 ns	$78\text{ ns} + (0,55\text{ ns/pF}) C_L$ $39\text{ ns} + (0,23\text{ ns/pF}) C_L$ $27\text{ ns} + (0,16\text{ ns/pF}) C_L$
LOW to HIGH	5 10 15	t_{PLH}		90 35 25	185 70 50 ns	$63\text{ ns} + (0,55\text{ ns/pF}) C_L$ $24\text{ ns} + (0,23\text{ ns/pF}) C_L$ $17\text{ ns} + (0,16\text{ ns/pF}) C_L$
$\overline{\text{MR}} \rightarrow$ O _n HIGH to LOW	5 10 15	t_{PHL}		120 50 35	245 100 70 ns	$93\text{ ns} + (0,55\text{ ns/pF}) C_L$ $39\text{ ns} + (0,23\text{ ns/pF}) C_L$ $27\text{ ns} + (0,16\text{ ns/pF}) C_L$
$\overline{\text{MR}} \rightarrow$ TC HIGH to LOW	5 10 15	t_{PHL}		145 60 45	295 120 85 ns	$118\text{ ns} + (0,55\text{ ns/pF}) C_L$ $49\text{ ns} + (0,23\text{ ns/pF}) C_L$ $37\text{ ns} + (0,16\text{ ns/pF}) C_L$

4-bit synchronous binary counter with asynchronous reset

HEF40161B MSI

	V _{DD} V	SYMBOL	MIN.	TYP.	MAX.	TYPICAL EXTRAPOLATION FORMULA	
Output transition times HIGH to LOW	5	t _{THL}		60	120	ns	10 ns + (1,0 ns/pF) C _L
	10			30	60	ns	9 ns + (0,42 ns/pF) C _L
	15			20	40	ns	6 ns + (0,28 ns/pF) C _L
LOW to HIGH	5	t _{TLH}		60	120	ns	10 ns + (1,0 ns/pF) C _L
	10			30	60	ns	9 ns + (0,42 ns/pF) C _L
	15			20	40	ns	6 ns + (0,28 ns/pF) C _L

AC CHARACTERISTICS



V_{SS} = 0 V; T_{amb} = 25 °C; C_L = 50 pF; input transition times ≤ 20 ns

	V _{DD} V	SYMBOL	MIN.	TYP.	MAX.	
Minimum clock pulse width; LOW	5	t _{WCPL}	100	50	ns	see also waveforms Figs 5, 6, 7 and 8
	10		40	20	ns	
	15		30	15	ns	
Minimum $\overline{\text{MR}}$ pulse width; LOW	5	t _{WMRL}	100	50	ns	
	10		40	20	ns	
	15		30	15	ns	
Recovery time for $\overline{\text{MR}}$	5	t _{RMR}	25	0	ns	
	10		15	0	ns	
	15		10	0	ns	
Set-up times P _n → CP	5	t _{su}	110	55	ns	
	10		40	20	ns	
	15		30	15	ns	
$\overline{\text{PE}}$ → CP	5	t _{su}	120	60	ns	
	10		40	20	ns	
	15		25	10	ns	
CEP, CET → CP	5	t _{su}	260	130	ns	
	10		100	50	ns	
	15		70	35	ns	
Hold times P _n → CP	5	t _{hold}	20	−35	ns	
	10		10	−10	ns	
	15		5	−10	ns	
$\overline{\text{PE}}$ → CP	5	t _{hold}	15	−45	ns	
	10		5	−15	ns	
	15		5	−10	ns	
CEP, CET → CP	5	t _{hold}	25	−105	ns	
	10		15	−35	ns	
	15		10	−25	ns	

4-bit synchronous binary counter with asynchronous reset



HEF40161B
MSI

	V _{DD} V	SYMBOL	MIN.	TYP.	MAX.	
Maximum clock pulse frequency	5	f _{max}	2,5	5	MHz	
	10		7	14	MHz	
	15		9	18	MHz	

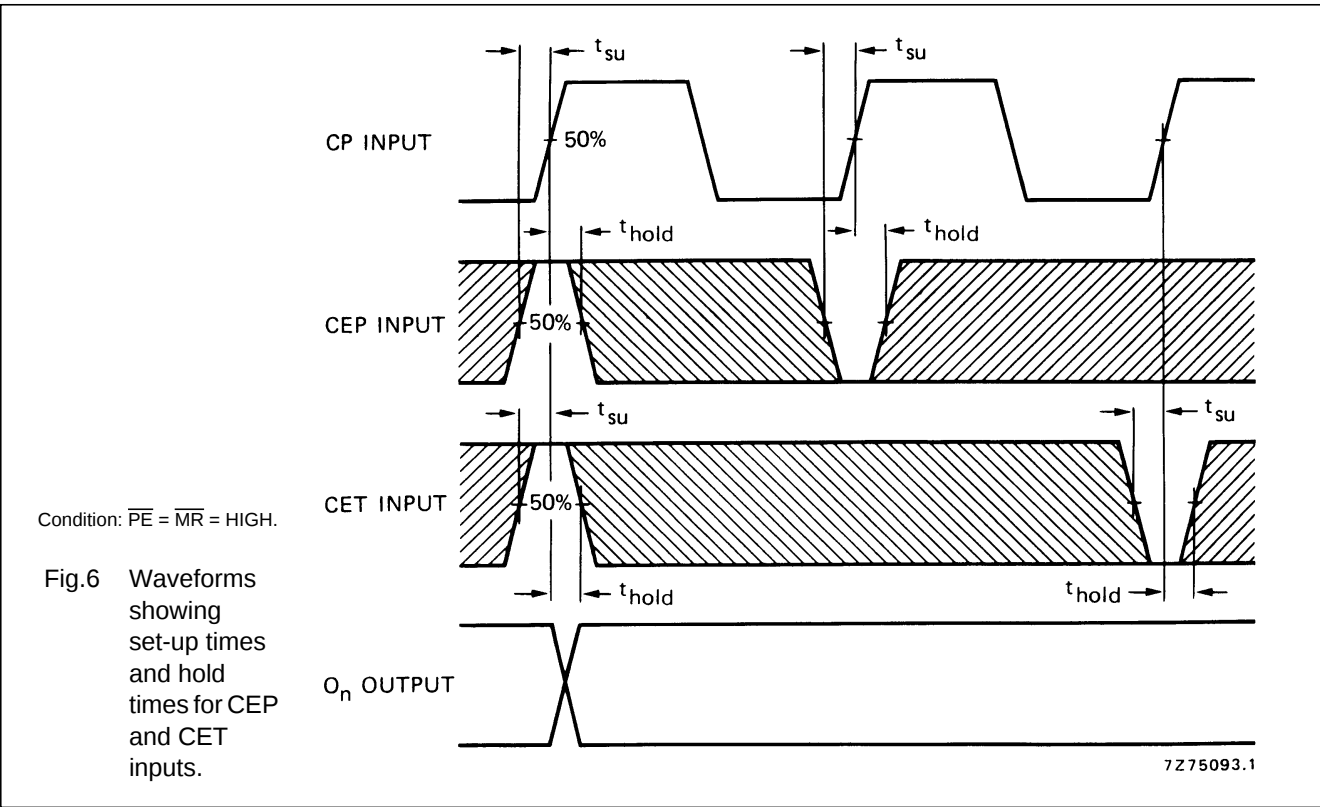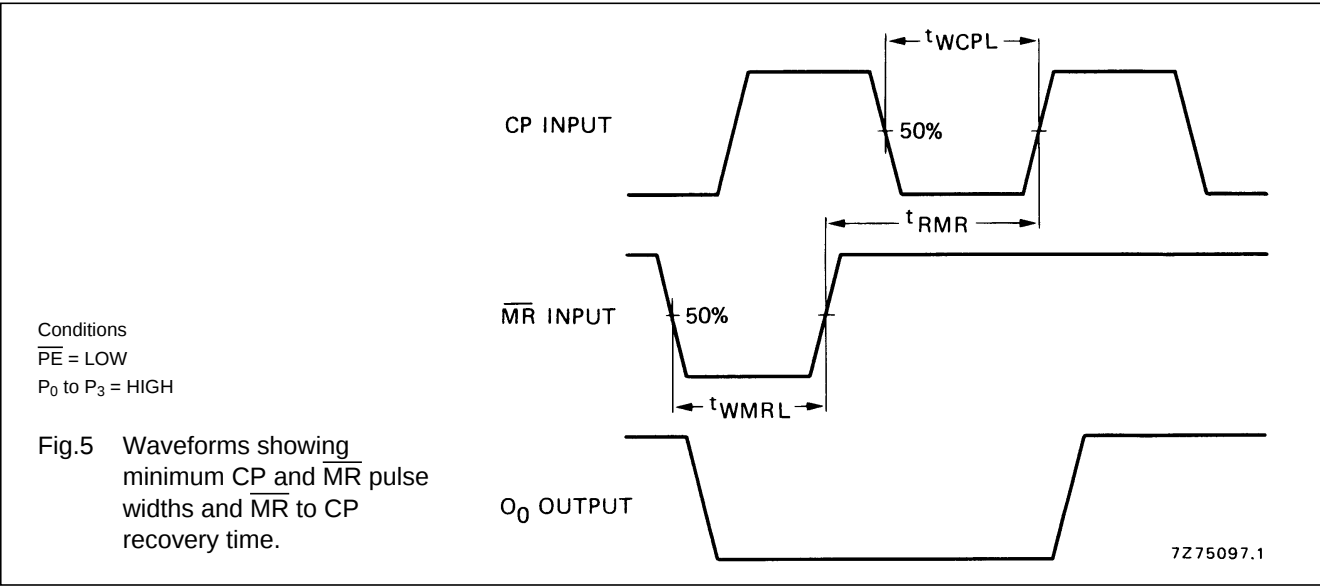

4-bit synchronous binary counter with asynchronous reset

HEF40161B
MSI

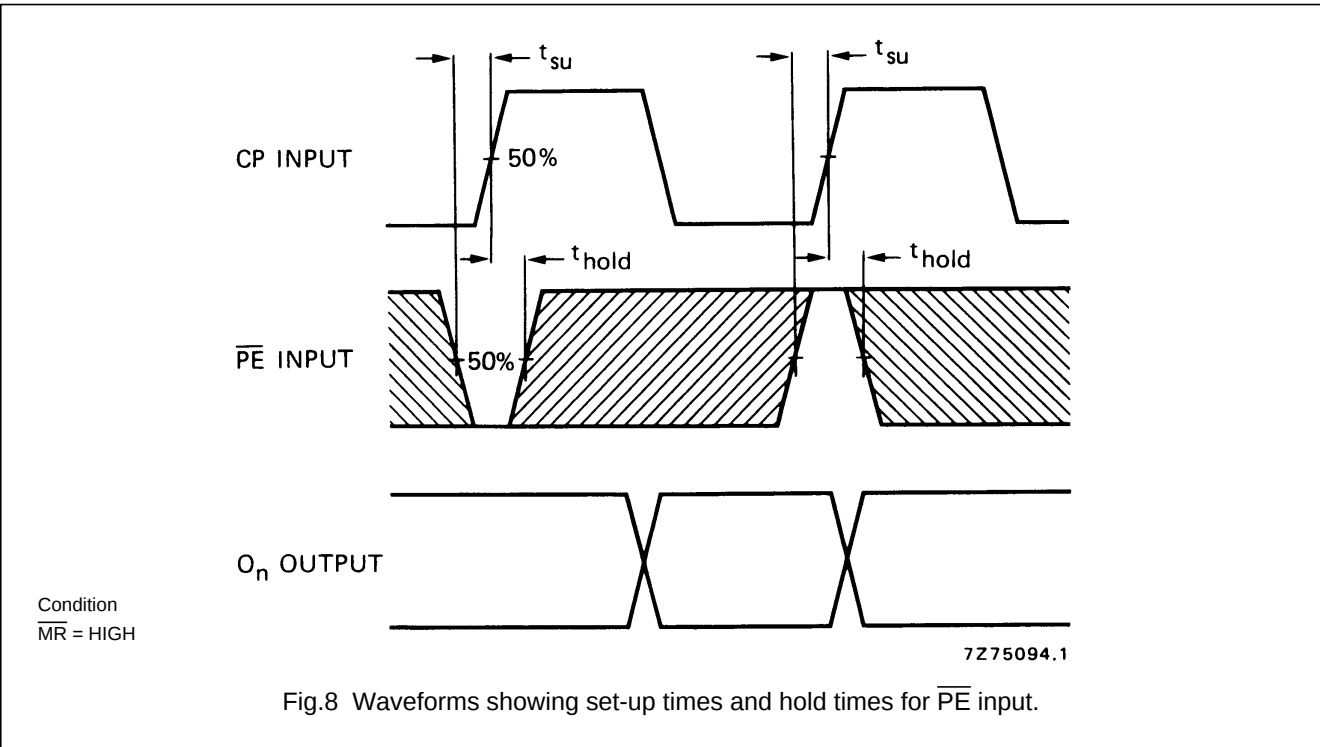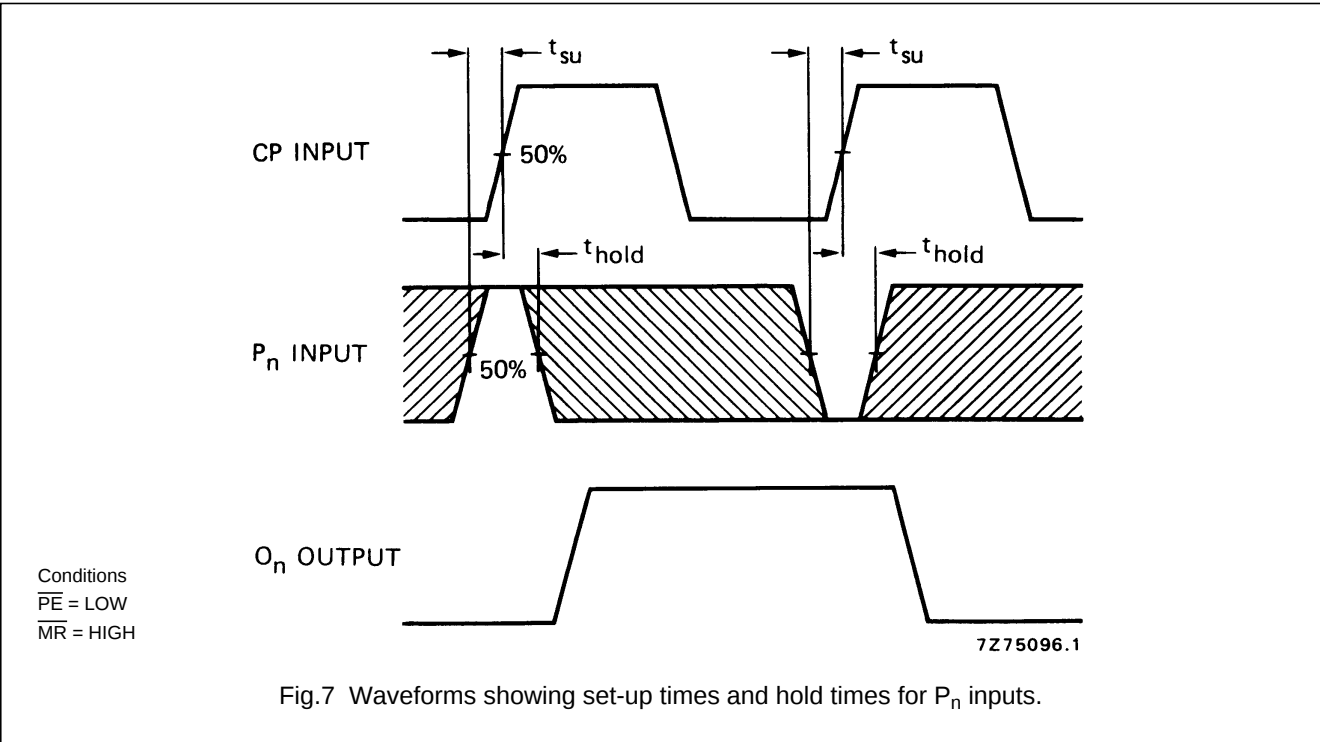

Note

Set-up and hold times are shown as positive values but may be specified as negative values.

4-bit synchronous binary counter with asynchronous reset

HEF40161B
MSI

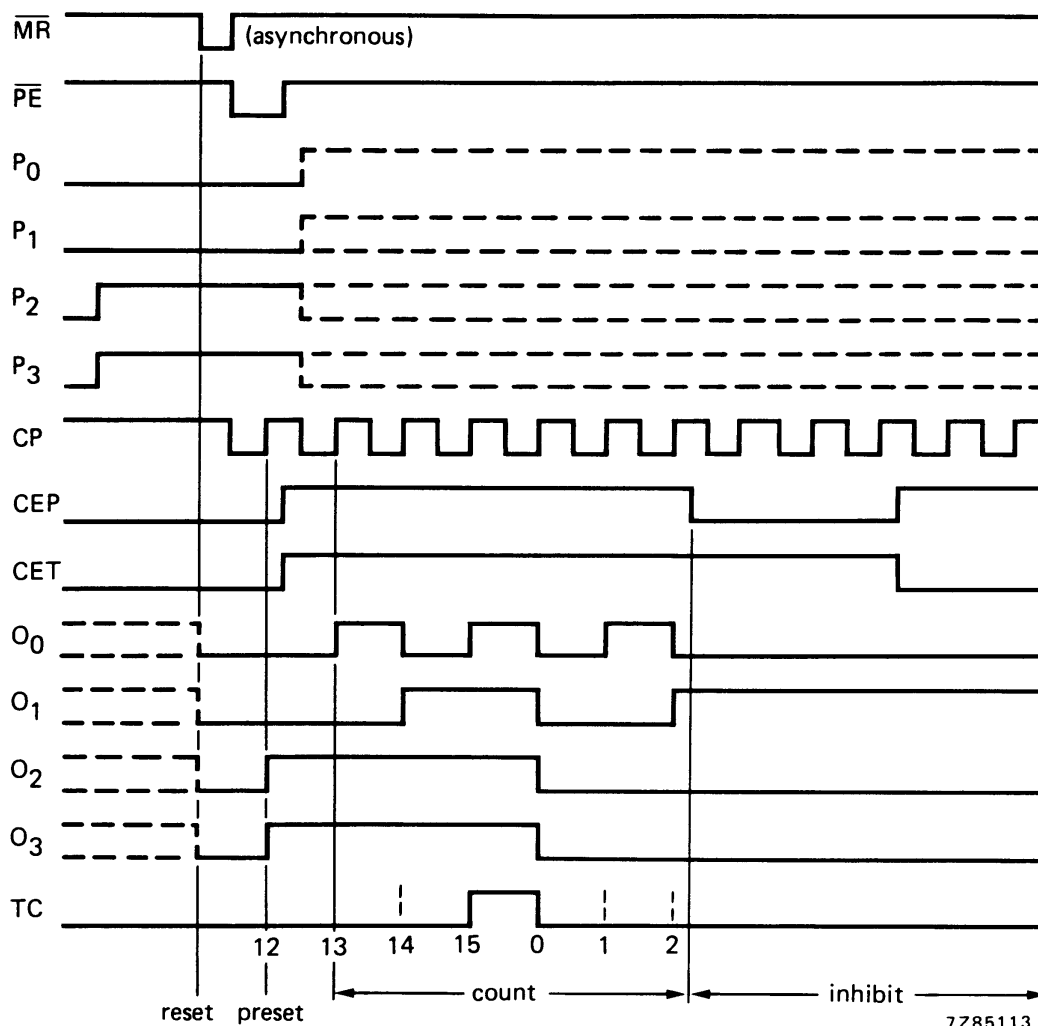


Fig.9 Timing diagram.

APPLICATION INFORMATION

An example of an application for the HEF40161B is:

- Programmable binary counter.

4-bit synchronous binary counter with
asynchronous reset

HEF40161B
MSI

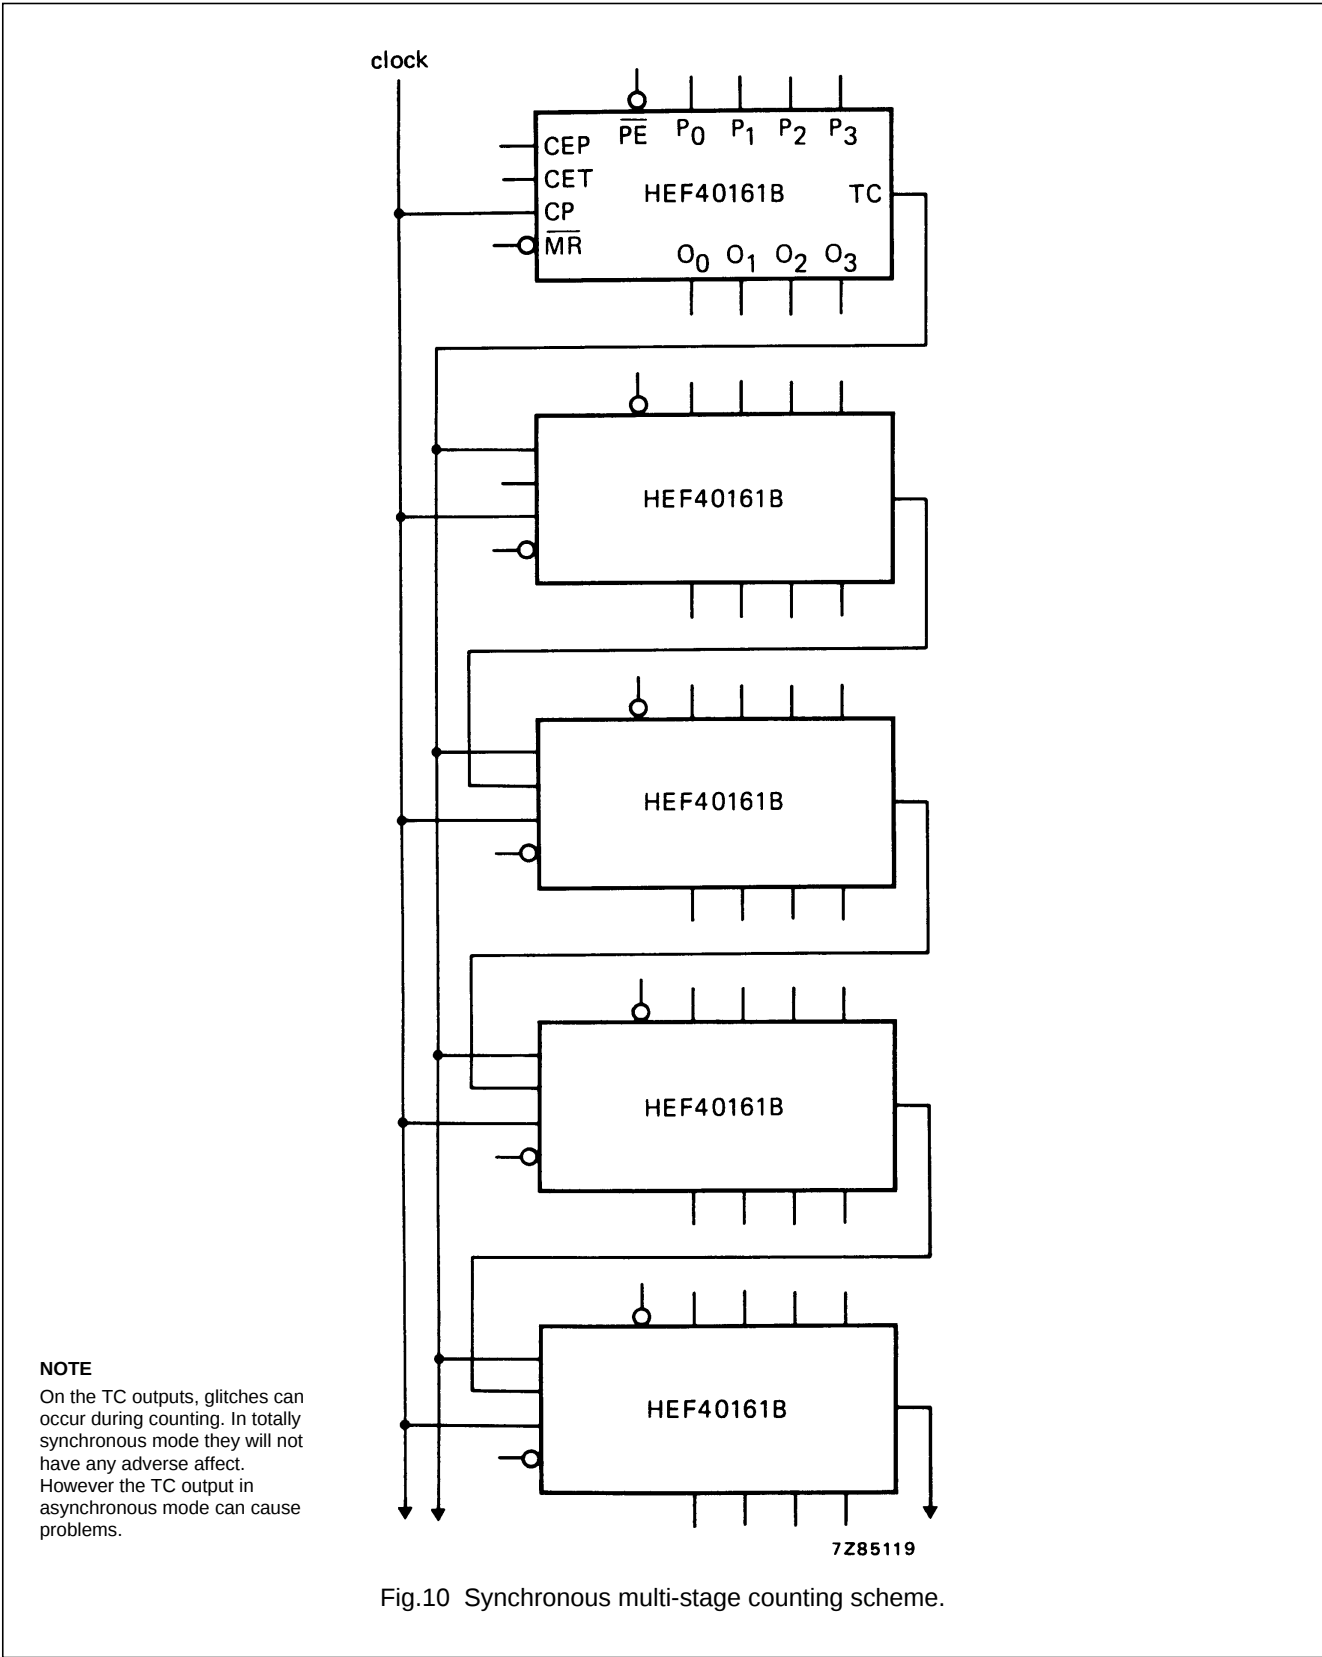


Fig.10 Synchronous multi-stage counting scheme.

Discontinued and withdrawn products, packages, availability and ordering

<u>Type number</u>	<u>North American</u>	<u>Order code</u>	<u>marking/packing</u>	<u>package</u>	<u>device status</u>	<u>buy online</u>
	<u>Type number</u>	<u>(12nc)</u>	 IC packing info			
HEC40161BDB		9350 193 70112	Standard Marking * Tube	SOT74	Withdrawn	-
HEF40161BD		9333 725 00652	Standard Marking * Tube, CECC	SOT74	Withdrawn	-
HEF40161BDB		9335 297 70652	Standard Marking * Tube, CECC	SOT74	Withdrawn	-
HEF40161BP		9333 343 60652	Standard Marking * Tube, CECC	SOT38	Withdrawn	-
HEF40161BPB		9336 370 20652	Standard Marking * Tube, CECC	SOT38	Withdrawn	-
HEF40161BT		9333 734 30652	Standard Marking * Tube, CECC	SOT109 (SO16)	Withdrawn	-
		9333 734 30653	Standard Marking * Reel Pack, SMD, 13", CECC	SOT109 (SO16)	Withdrawn	-
HEF40161BU		9333 789 90005	No Marking * Chips on Wafer, Pre-Sawn, On FFC	-	Withdrawn	-

[Detailed discontinuation information](#)

Please note, devices listed in the "Products, packages, availability and ordering" table marked with "Withdrawn" are not in production anymore. Devices marked with "Discontinued" will not be in production in the near future.
Contact your nearest [sales or distributor office](#) for the latest information on product status and availability.

Click to return to the available devices:  [hef40161b_cnv_3](#)