


MSTBA 2,5/...-G-LAHeader **with** side panels

Pitch 5.0 or 5.08

	I	U
	[A]	[V]
Connection data	12	250

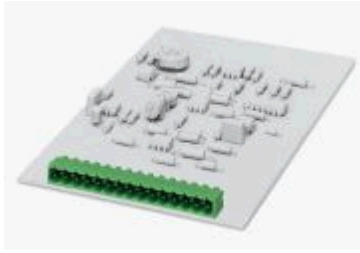

Description	No. of positions	Dim. a [mm]	Type	Order No.	Pcs. Pkt.
Headers, 5.0 mm pitch, for light indicator element MSTB-LA/RD, color: green	2	5	MSTBA 2,5/2-G-LA	17 70 48 1	50
	3	10	MSTBA 2,5/3-G-LA	17 70 49 4	
	4	15	MSTBA 2,5/4-G-LA	17 70 50 4	
	5	20	MSTBA 2,5/5-G-LA	17 70 51 7	
	6	25	MSTBA 2,5/6-G-LA	17 70 52 0	
	7	30	MSTBA 2,5/7-G-LA	17 70 53 3	
	8	35	MSTBA 2,5/8-G-LA	17 70 54 6	
	9	40	MSTBA 2,5/9-G-LA	17 70 55 9	
	10	45	MSTBA 2,5/10-G-LA	17 70 56 2	
	11	50	MSTBA 2,5/11-G-LA	17 70 57 5	
	12	55	MSTBA 2,5/12-G-LA	17 70 58 8	
	13	60	MSTBA 2,5/13-G-LA	17 70 59 1	
	14	65	MSTBA 2,5/14-G-LA	17 70 60 1	
	15	70	MSTBA 2,5/15-G-LA	17 70 61 4	
	16	75	MSTBA 2,5/16-G-LA	17 70 62 7	
	17	80	MSTBA 2,5/17-G-LA	17 70 63 0	
	18	85	MSTBA 2,5/18-G-LA	17 70 64 3	
	19	90	MSTBA 2,5/19-G-LA	17 70 65 6	
	20	95	MSTBA 2,5/20-G-LA	17 70 66 9	
	21	100	MSTBA 2,5/21-G-LA	17 70 67 2	
	22	105	MSTBA 2,5/22-G-LA	17 70 68 5	
	23	110	MSTBA 2,5/23-G-LA	17 70 69 8	
	24	115	MSTBA 2,5/24-G-LA	17 70 70 8	
	Headers, 5.08 mm pitch, for light indicator element MSTB-LA/RD, color: green	2	5.08	MSTBA 2,5/2-G-5,08-LA	
3		10.16	MSTBA 2,5/3-G-5,08-LA	17 70 95 7	
4		15.24	MSTBA 2,5/4-G-5,08-LA	17 70 96 0	
5		20.32	MSTBA 2,5/5-G-5,08-LA	17 70 97 3	
6		25.40	MSTBA 2,5/6-G-5,08-LA	17 70 98 6	
7		30.48	MSTBA 2,5/7-G-5,08-LA	17 70 99 9	
8		35.56	MSTBA 2,5/8-G-5,08-LA	17 71 00 8	

8	38.00	MSTBA 2,5/8-G-5,08-LA	17 68 01 0
9	40.64	MSTBA 2,5/9-G-5,08-LA	17 68 01 1
10	45.72	MSTBA 2,5/10-G-5,08-LA	17 68 02 4
11	50.80	MSTBA 2,5/11-G-5,08-LA	17 68 03 7
12	55.88	MSTBA 2,5/12-G-5,08-LA	17 68 04 0
13	60.96	MSTBA 2,5/13-G-5,08-LA	17 68 05 3
14	66.04	MSTBA 2,5/14-G-5,08-LA	17 68 06 6
15	71.12	MSTBA 2,5/15-G-5,08-LA	17 68 07 9
16	76.20	MSTBA 2,5/16-G-5,08-LA	17 68 08 2
17	81.28	MSTBA 2,5/17-G-5,08-LA	17 68 09 5
18	86.36	MSTBA 2,5/18-G-5,08-LA	17 68 10 5
19	91.44	MSTBA 2,5/19-G-5,08-LA	17 68 11 8
20	96.52	MSTBA 2,5/20-G-5,08-LA	17 68 12 1
21	101.60	MSTBA 2,5/21-G-5,08-LA	17 68 13 4
22	106.68	MSTBA 2,5/22-G-5,08-LA	17 68 14 7
23	111.76	MSTBA 2,5/23-G-5,08-LA	17 68 15 0
24	116.84	MSTBA 2,5/24-G-5,08-LA	17 68 16 3

Technical data

Dimensions

see description

Pitch	[mm]	5.0 / 5.08
Pin dimensions	[mm] x [mm]	1 x 1
Hole diameter	[mm]	1.4

Technical data in accordance with IEC / DIN VDE

Insulation material group	-/-		I	
Surge voltage category / contamination class	-/-	III / 3	III / 2	II / 2
Rated voltage	[V]	250	320	400
Rated surge voltage	[kV]	4	4	4
Nominal current	[A]		12	
Maximum load current per position	[A]		12	

Insulation material

PA

Inflammability class acc. to UL 94

V2

Temperature indices RTI/Ti

125/100

Approval data (UL and CSA)

CSA: [V] / [A] / AWG

300 / 10 / -

Articles printed in bold can be delivered at short notice.

Dimensional drawing

