


SPB 10-TRKS 4-FS

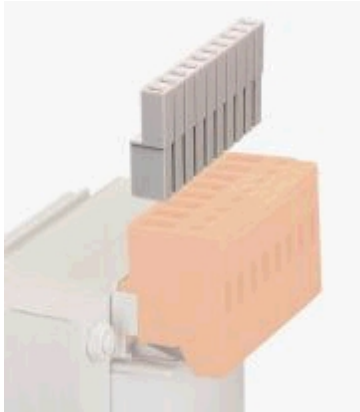

Test plug for TRKS 4-FS or TRKSD 4-FS

(IEC)	flexible	I	U
[mm ²]	stranded AWG	[A]	[V]
Connection data	0.5-2.5 ²)	20-18 ²)	20 ²) 690 ¹)

¹) Only actuate in off load state.²) Data depends on the socket contact.

Description	Type	Order No.	Pcs. Pkt.
Test plug , 10 position,divisible as required, for holding the module socket contacts STG-MTN	gray SPB 10-TRKS 4-FS	13 01 41 0	10
Module socket contacts , are pushed into the test plug SPB 10-TRKS 4-FS after crimping the conductors,	gray		
for 0.5-1.0 mm ² (max. 13.5 A)	STG-MTN 0,5-1,0	31 90 43 8	100
conductors from:			
1.5-2.5 mm ² (max. 20 A)	STG-MTN 1,5-2,5	31 90 50 6	100
Contact removal tool , for removing themodule socket contacts	 STG-EW	31 90 44 1	1
Crimping pliers , for crimping conductors to the module socket contacts STG-MTN	 CRIMPFOX MT 2,5	12 04 03 8	1

Technical data

Dimensions

see description

Insulation material

PA


Inflammability class acc. to UL 94

HB

Temperature indices RTI / Ti

125 / 100

Dimensional drawing

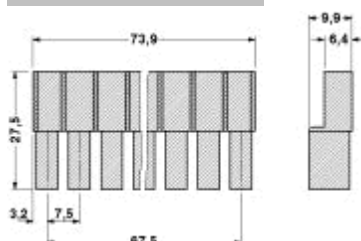

Diagram

