

PTH03050

3.3 Vin Single Output

Data Sheet

Total Power: 15 Watts
Input Voltage: 2.95 - 3.65 Vdc
of Outputs: Single

SPECIAL FEATURES

- 6 A output current
- 3.3 V input voltage
- Wide-output voltage adjust (0.8 V - 2.5 V)
- Auto-track™ sequencing*
- Pre-bias start-up capability
- Efficiencies up to 94%
- Output ON/OFF inhibit
- Output voltage sense
- Point-of-Load-Alliance (POLA) compatible
- RoHS compliant
- Two year warranty

SAFETY

- UL/cUL CAN/CSA-C22.2 No. 60950-1-03
- UL 60950-1 File No. E174104
- TÜV Product Service (EN60950) Certificate No. B04 06 38572 044
- CB report and certificate to IEC60950, Certificate No. US/8292/UL



Electrical Specifications

| Input | | |
|--------------------------|-----------------------|--|
| Input voltage range | (See Note 3) | 2.95 - 3.65 V |
| Input current | No load | 10 mA typical |
| Remote ON/OFF | (See Note 1) | Positive logic |
| Start-up time | | 1 V/ms |
| Undervoltage lockout | | 3.7 - 4.3 Vdc typical |
| Track input voltage | Pin 2 (See Note 6, 7) | ±0.3 Vin |
| Output | | |
| Voltage adjustability | (See Note 4) | 0.8 - 2.5 Vdc |
| Setpoint accuracy | | ±2.0% Vo |
| Line regulation | | ±10 mV typical |
| Load regulation | | ±12 mV typical |
| Total regulation | | ±3.0% Vo |
| Minimum load | | 0 A |
| Ripple and noise | 20 MHz bandwidth | 30 mV pk-pk |
| Temperature co-efficient | -40 °C to +85 °C | ±0.5% Vo |
| Transient response | (See Note 5) | 70 μs recovery time Overshoot/undershoot 100 mV |

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated. Cin = 100 μF, Cout = 0 μF.

*Auto-track is a trademark of Texas Instruments.

General Specifications

| | | |
|-------------------------|------------------------|---|
| Efficiency | (See Efficiency Table) | 94% max. |
| Insulation voltage | | Non-isolated |
| Switching frequency | Fixed | 600 kHz typ. ±50 kHz |
| Approvals and standards | | EN60950, UL/cUL60950 |
| Material flammability | | UL94V-0 |
| Dimensions | L x W x H | 22.10 x 12.57 x 8.50 mm 0.870 x 0.495 x 0.335 in |
| Weight | | 2.9 g (0.10 oz) |
| MTBF | Telcordia SR-332 | 7,092,000 hours |

EMC Characteristics

| | |
|-------------------------|-----------------------|
| Electrostatic discharge | EN61000-4-2, IEC801-2 |
| Conducted immunity | EN61000-4-6 |
| Radiated immunity | EN61000-4-3 |

Environmental Specifications

| | | |
|-------------------------------------|-------------------------------|-------------------|
| Thermal performance (See Note 2) | Operating ambient temperature | -40 °C to +85 °C |
| | Non-operating temperature | -40 °C to +125 °C |
| MSL ('Z' suffix only) | JEDEC J-STD-020C | Level 3 |
| Protection | | |
| Short-circuit | Auto reset | 12 A typical |

Ordering Information

| Model Number ⁽⁹⁾ | Output Power (Max.) | Input Voltage | Output Voltage | Output Current (Min.) | Output Current (Max.) | Efficiency (Typical) | Regulation | |
|-----------------------------|---------------------|---------------|----------------|-----------------------|-----------------------|----------------------|------------|--------|
| | | | | | | | Line | Load |
| PTH03050 | 15 W | 2.95 - 3.65 V | 0.8 - 2.5 V | 0 A | 6 A | 94% | ±10 mV | ±12 mV |

Part Number System with Options

| Product Family | Input Voltage | Output Current | Mechanical Package | Output Voltage Code | Pin Option | Mounting Options | Pin Option |
|-----------------------------------|---------------|----------------|--------------------|---------------------|------------|---|---|
| PTH | 03 | 05 | 0 | W | A | S | T |
| Point-of-Load Alliance compatible | 03 = 3.3 V | 05 = 6 A | Always 0 | W = Wide | | D = Horizontal through-hole (Matte Sn) Z = Surface-mount (96.5/3.0/0.5 Sn/Ag/Cu pin solder material) | No Suffix = Trays T = Tape and Reel ⁽⁹⁾ |

Output Voltage Adjustment

The ultra-wide output voltage trim range offers major advantages to users who select the PTH03050. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 0.8 Vdc to 2.5 Vdc. When the PTH03050 converter leaves the factory the output has been adjusted to the default voltage of 0.8 V.

Efficiency Table (I_o = 4 A)

| Output Voltage | Efficiency |
|------------------------|------------|
| V _o = 1.0 V | 87% |
| V _o = 1.2 V | 88% |
| V _o = 1.5 V | 90% |
| V _o = 1.8 V | 91% |
| V _o = 2.0 V | 92% |
| V _o = 2.5 V | 94% |

Notes:

- Remote ON/OFF. Positive Logic
ON: Pin 3 open; or V > V_{in} - 0.5 V
OFF: Pin 3 GND; or V < 0.8 V (min - 0.2 V).
- See Figures 1 for safe operating curves.
- A 100 µF electrolytic input capacitor is required for proper operation. The capacitor must be rated for a minimum of 300 mA rms of ripple current.
- An external output capacitor is not required for basic operation. Adding 100 µF of distributed capacitance at the load will improve the transient response.
- 1 A/µs load step, 50 to 100% I_{omax}, C_{out} = 100 µF.
- If utilized V_{out} will track applied voltage by ±0.3 V (up to V_o set point).
- The pre-bias start-up feature is not compatible with Auto-Track™. This is because when the module is under Auto-Track™ control, it is fully active and will sink current if the output voltage is below that of a back-feeding source. Therefore to ensure a pre-bias hold-off, one of the following two techniques must be followed when input power is first applied to the module. The Auto-Track™ function must either be disabled, or the module's output held off using the inhibit pin. Refer to Application Note 153 for more details.
- Tape and reel packaging only available on the surface-mount versions.
- NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com> to find a suitable alternative.

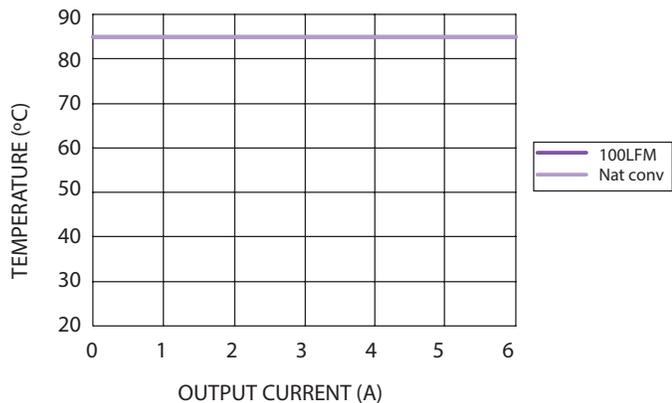


Figure 1 - Safe Operating Area
 $V_{in} = 3.3\text{ V}$, Output Voltage = 2.5 V (See Note A)

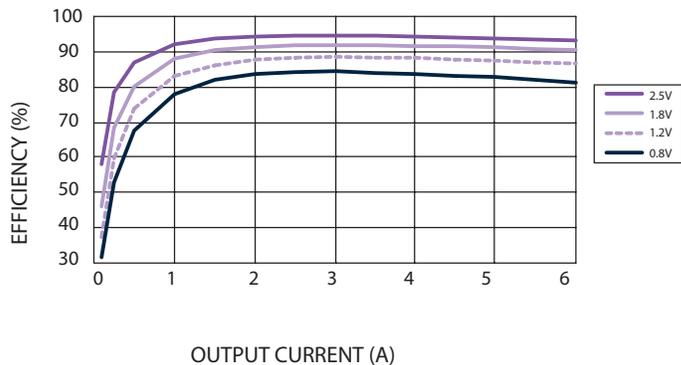


Figure 2 - Efficiency vs Load Current
 $V_{in} = 3.3\text{ V}$ (See Note B)

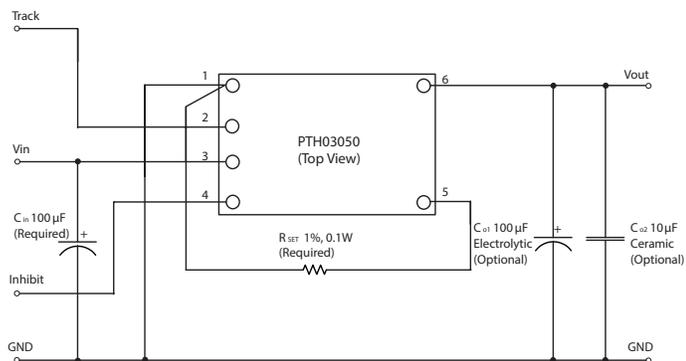



Figure 3 - Standard Application

Notes:

- A. SOA curves represent the conditions at which internal components are within the Artesyn derating guidelines.
- B. Characteristic data has been developed from actual products tested at 25 °C. This data is considered typical data for the converter.

Mechanical Drawings

Plated through-hole

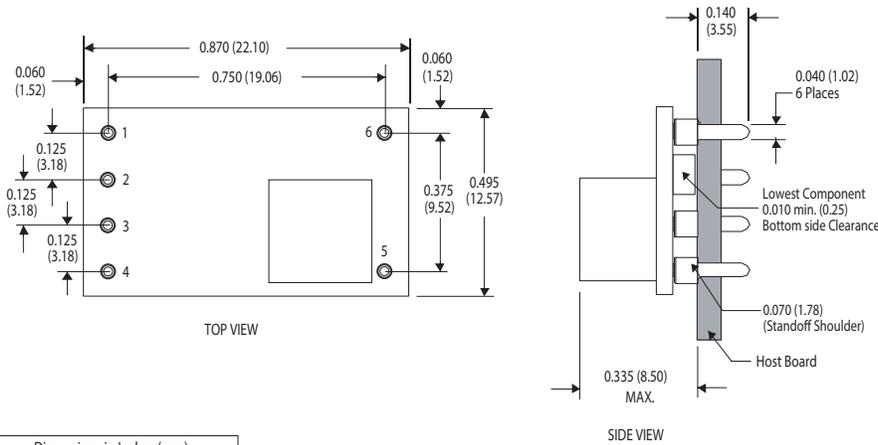


Dimensions in Inches (mm)
Tolerances (unless otherwise specified)
2 Places ± 0.030 (± 0.76)
3 Places ± 0.010 (± 0.25)

| Pin Assignments | |
|-----------------|-----------|
| Pin | Function |
| 1 | Ground |
| 2 | Track |
| 3 | Vin |
| 4 | Inhibit* |
| 5 | Vo adjust |
| 6 | Vout |

*Denotes negative logic:
Open = Normal operation
Ground = Function active

Surface-mount

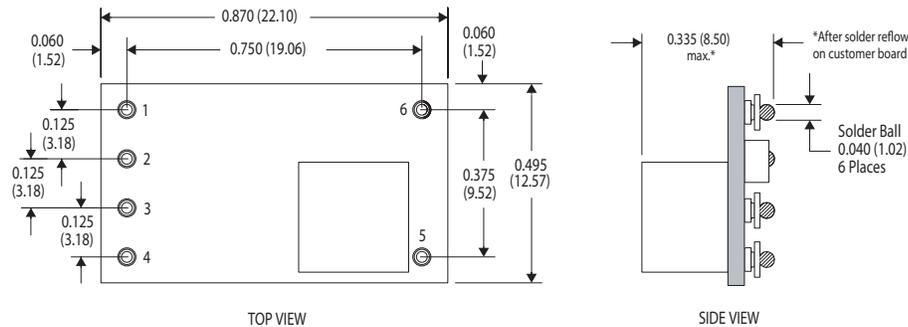

Dimensions in Inches (mm)
Tolerances (unless otherwise specified)
2 Places ± 0.030 (± 0.76)
3 Places ± 0.010 (± 0.25)

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberry House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com