

## FRONT-SFL 2,5/F48



32- or 48-position, design F

(IEC)	rigid	flexible	I	U	
[mm <sup>2</sup> ]	solid	stranded	AWG	[A]	[V]
Connection data	0.2-4	0.2-2.5	24-12	4	250




Description	Type	Order No.	Pcs. Pkt.
<b>Screw socket strip, design F,</b> 48-position, fully equipped in rows <b>z</b> , <b>b + d</b>	<b>FRONT-SFL 2,5/F48</b>	<b>22 85 60 3</b>	10
32-position, partly equipped in rows <b>z + b</b>	<b>FRONT-SFL 2,5/F32/ZB</b>	<b>22 85 57 7</b>	10
32-position, partly equipped in rows <b>z + d</b>	<b>FRONT-SFL 2,5/F32/ZD</b>	<b>22 85 58 0</b>	10
one 2.5 mm <sup>2</sup> screw connection per position			

### Technical data

<b>Dimensions</b>		see description
<b>Rated surge voltage / contamination class</b>	[kV]/ –	4 / 3
<b>Surge voltage category / insulation material group</b>	– / –	III / I
<b>Stripping length</b>	[mm]	10
<b>Thread</b>		M 2,5
<b>Torque</b>	[Nm]	0.4 - 0.5
<b>Insulation material</b>		PA
Inflammability class acc. to UL 94		V2
Temperature indices RTI/Ti		125/100
<b>Approval data (UL and CSA)</b>		
Nominal voltage / current / conductor sizes	UL: [V] / [A] / AWG	300 / 4 / 30 - 12
	CUL: [V] / [A] / AWG	300 / 4 / 30 - 12

### Dimensional drawing

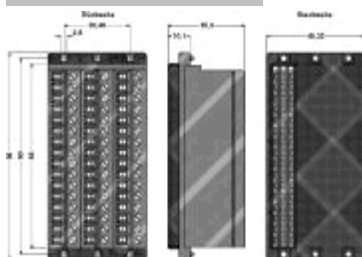

FRONT-SFL 2,5/F48

