

PKM 4000D PINB Series DC/DC converters, Input 36-75 V, Output 40 A/132 W	EN/LZT 146 306 R4A July 2008
	© Ericsson Power Modules AB

Key Features

- Industry standard quarter-brick. 57.93 x 36.8 x 9.1 mm (2.28 x 1.449 x 0.35 in.)
- High efficiency, typ. 93.6% at 12.0 Vout half load
- 1500 Vdc input to output isolation
- Meets isolation requirements equivalent to basic insulation according to IEC/EN/UL 60950
- More than 3.15 million hours MTBF

General Characteristics

- Over temperature protection
- Over current limit protection
- Over voltage protection
- Remote control
- Output voltage adjust function
- Highly automated manufacturing ensures quality
- ISO 9001/14001 certified supplier



Safety Approvals



Design for Environment



Meets requirements in high-temperature lead-free soldering processes.

Contents

General Information	2
Safety Specification	3
Absolute Maximum Ratings	4
Product Program	Ordering No.
2.5 V, 40A / 100W Electrical Specification	PKM4119D PINB 5
3.3 V, 35A / 115W Electrical Specification	PKM4110D PINB 8
5.0 V, 25A / 125W Electrical Specification	PKM4111D PINB 11
6.0 V, 20A / 120W Electrical Specification	PKM4117VD PINB 14
7.2 V, 15A / 108W Electrical Specification	PKM4116D PINB 17
12.0 V, 11A / 132W Electrical Specification	PKM4113D PINB 20
EMC Specification	23
Operating Information	24
Thermal Consideration	25
Connections	26
Mechanical Information	27
Soldering Information	29
Delivery Information	29
Product Qualification Specification	30

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W

EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

General Information
Ordering Information

See Contents for individual product ordering numbers.

Option	Suffix	Ordering No.
Baseplate		PKM 4110D PI
Positive Remote Control Logic	P	PKM 4110D PIPNB
Increased stand-off height	M	PKM 4110D PINBM
Lead length 3.69 mm (0.145 in)	LA	PKM 4110D PINBLA
Lead length 4.57 mm (0.180 in)	LB	PKM 4110D PINBLB

Note: As an example a positive logic, increased standoff, short pin product would be PKM 4110D PIPNBMLA.

Reliability

The Mean Time Between Failure (MTBF) is calculated at full output power and an operating ambient temperature (T_A) of +40°C. Different methods could be used to calculate the predicted MTBF and failure rate which may give different results. Ericsson Power Modules currently uses two different methods, Ericsson failure rate data system DependTool and Telcordia SR332.

Predicted MTBF for the series is:

- 3.15 million hours according to DependTool.
- 1.67 million hours according to Telcordia SR332, issue 1, Black box technique.

The Ericsson failure rate data system is based on field tracking data. The data corresponds to actual failure rates of components used in Information Technology and Telecom (IT&T) equipment in temperature controlled environments

($T_A = -5...+65^\circ\text{C}$). Telcordia SR332 is a commonly used standard method intended for reliability calculations in IT&T equipment. The parts count procedure used in this method was originally modelled on the methods from MIL-HDBK-217F, Reliability Predictions of Electronic Equipment.

It assumes that no reliability data is available on the actual units and devices for which the predictions are to be made, i.e. all predictions are based on generic reliability parameters.

Compatibility with RoHS requirements

The products are compatible with the relevant clauses and requirements of the RoHS directive 2002/95/EC and have a maximum concentration value of 0.1% by weight in homogeneous materials for lead, mercury, hexavalent chromium, PBB and PBDE and of 0.01% by weight in homogeneous materials for cadmium.

Exemptions in the RoHS directive utilized in Ericsson Power Modules products include:

- Lead in high melting temperature type solder (used to solder the die in semiconductor packages)
- Lead in glass of electronics components and in

electronic ceramic parts (e.g. fill material in chip resistors)

- Lead as an alloying element in copper alloy containing up to 4% lead by weight (used in connection pins made of Brass)

Quality Statement

The products are designed and manufactured in an industrial environment where quality systems and methods like ISO 9000, 6 σ (sigma), and SPC are intensively in use to boost the continuous improvements strategy. Infant mortality or early failures in the products are screened out and they are subjected to an ATE-based final test. Conservative design rules, design reviews and product qualifications, plus the high competence of an engaged work force, contribute to the high quality of our products.

Warranty

Warranty period and conditions are defined in Ericsson Power Modules General Terms and Conditions of Sale.

Limitation of Liability

Ericsson power Modules does not make any other warranties, expressed or implied including any warranty of merchantability or fitness for a particular purpose (including, but not limited to, use in life support applications, where malfunctions of product can cause injury to a person's health or life).

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W

EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

Safety Specification

General information

Ericsson Power Modules DC/DC converters and DC/DC regulators are designed in accordance with safety standards IEC/EN/UL60950, *Safety of Information Technology Equipment*.

IEC/EN/UL60950 contains requirements to prevent injury or damage due to the following hazards:

- Electrical shock
- Energy hazards
- Fire
- Mechanical and heat hazards
- Radiation hazards
- Chemical hazards

On-board DC-DC converters are defined as component power supplies. As components they cannot fully comply with the provisions of any Safety requirements without "Conditions of Acceptability". It is the responsibility of the installer to ensure that the final product housing these components complies with the requirements of all applicable Safety standards and Directives for the final product.

Component power supplies for general use should comply with the requirements in IEC60950, EN60950 and UL60950 "Safety of information technology equipment".

There are other more product related standards, e.g. IEEE802.3af "Ethernet LAN/MAN Data terminal equipment power", and ETS300132-2 "Power supply interface at the input to telecommunications equipment; part 2: DC", but all of these standards are based on IEC/EN/UL60950 with regards to safety.

Ericsson Power Modules DC/DC converters and DC/DC regulators are UL60950 recognized and certified in accordance with EN60950.

The flammability rating for all construction parts of the products meets requirements for V-0 class material according to IEC 60695-11-10.

The products should be installed in the end-use equipment, in accordance with the requirements of the ultimate application. Normally the output of the DC/DC converter is considered as SELV (Safety Extra Low Voltage) and the input source must be isolated by minimum Double or Reinforced Insulation from the primary circuit (AC mains) in accordance with IEC/EN/UL60950.

Isolated DC/DC converters

It is recommended that a slow blow fuse with a rating twice the maximum input current per selected product be used at the input of each DC/DC converter. If an input filter is used in the circuit the fuse should be placed in front of the input filter.

In the rare event of a component problem in the input filter or in the DC/DC converter that imposes a short circuit on the input source, this fuse will provide the following functions:

- Isolate the faulty DC/DC converter from the input power source so as not to affect the operation of other parts of the system.
- Protect the distribution wiring from excessive current and power loss thus preventing hazardous overheating.

The galvanic isolation is verified in an electric strength test. The test voltage (V_{iso}) between input and output is 1500 Vdc or 2250 Vdc for 60 seconds (refer to product specification).

Leakage current is less than 1 μ A at nominal input voltage.

24 V DC systems

The input voltage to the DC/DC converter is SELV (Safety Extra Low Voltage) and the output remains SELV under normal and abnormal operating conditions.

48 and 60 V DC systems

If the input voltage to Ericsson Power Modules DC/DC converter is 75 Vdc or less, then the output remains SELV (Safety Extra Low Voltage) under normal and abnormal operating conditions.

Single fault testing in the input power supply circuit should be performed with the DC/DC converter connected to demonstrate that the input voltage does not exceed 75 Vdc.

If the input power source circuit is a DC power system, the source may be treated as a TNV2 circuit and testing has demonstrated compliance with SELV limits and isolation requirements equivalent to Basic Insulation in accordance with IEC/EN/UL60950.

Non-isolated DC/DC regulators

The input voltage to the DC/DC regulator is SELV (Safety Extra Low Voltage) and the output remains SELV under normal and abnormal operating conditions.


PKM 4000D PINB Series DC/DC converters, Input 36-75 V, Output 40 A/132 W	EN/LZT 146 306 R4A July 2008
	© Ericsson Power Modules AB

Absolute Maximum Ratings

Characteristics			min	typ	max	Unit
T _{ref}	Operating Temperature (see Thermal Consideration section)		-40		+110	°C
T _S	Storage temperature		-55		+125	°C
V _I	Input voltage		-0.5		+80	V
V _{iso}	Isolation voltage baseplate (input to output, input & output to baseplate test voltage)				1500	Vdc
V _{iso}	Isolation voltage no baseplate option (input to output)				1500	Vdc
V _{tr}	Input voltage transient (Tp 100 ms)				100	V
V _{RC}	Remote Control pin voltage (see Operating Information section)	Positive logic option	-0.5		+15	V
		Negative logic	-0.5		+15	V
V _{adj}	Adjust pin voltage (see Operating Information section)		-0.5		+5	V

Stress in excess of Absolute Maximum Ratings may cause permanent damage. Absolute Maximum Ratings, sometimes referred to as no destruction limits, are normally tested with one parameter at a time exceeding the limits of Output data or Electrical Characteristics. If exposed to stress above these limits, function and performance may degrade in an unspecified manner.

Fundamental Circuit Diagram

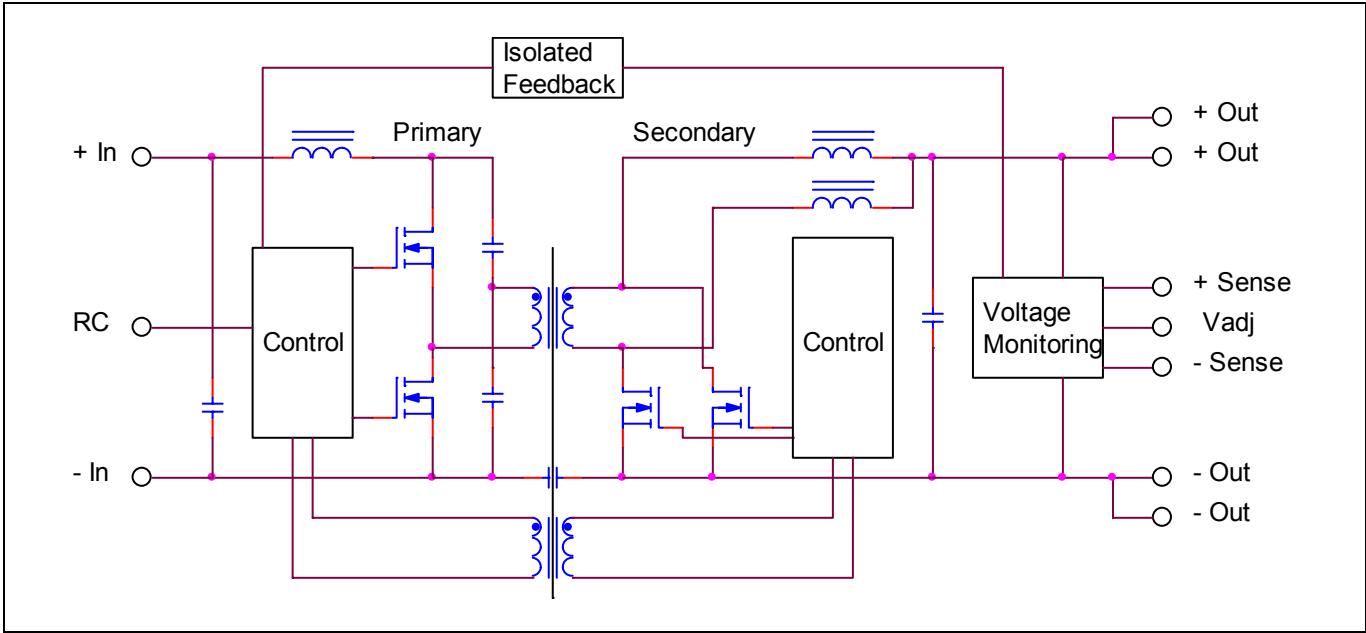

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W

EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

2.5 V Electrical Specification

PKM 4119D PINB

$T_{ref} = -40$ to $+90^{\circ}\text{C}$, $V_I = 36$ to 75 V, unless otherwise specified under Conditions.

Typical values given at: $T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, max I_O , unless otherwise specified under Conditions.

Characteristics		Conditions	min	typ	max	Unit
V _I	Input voltage range		36		75	V
V _{Ioff}	Turn-off input voltage	Decreasing input voltage		32		V
V _{Ion}	Turn-on input voltage	Increasing input voltage		34		V
C _I	Internal input capacitance			4.3		μF
P _O	Output power	Output voltage initial setting	0		100	W
SVR	Supply voltage rejection (ac)	f = 100 Hz sinewave, 1 Vp-p		60		dB
η	Efficiency	50 % of max I _O		90		%
		max I _O	86	87.5		
		50 % of max I _O , V _I = 48 V		90		
		max I _O , V _I = 48 V		87.5		
P _d	Power Dissipation	max I _O			16	W
P _{ii}	Input idling power	I _O = 0, V _I = 53 V		2.6		W
P _{RC}	Input standby power	V _I = 53 V (turned off with RC)		100		mW
f _s	Switching frequency	0 -100% of max I _O	180	200	220	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, $I_O = \text{max } I_O$ V_{adj} , see Note 1	2.45	2.50	2.55	V
	Output adjust range		2.21		2.81	V
V_O	Output voltage tolerance band	10-100% of max I_O	2.40		2.60	V
	Idling voltage	$I_O = 0$	2.40		2.60	V
	Line regulation	max I_O			15	mV
	Load regulation	$V_I = 53$ V, 1-100% of max I_O			15	mV
V_{tr}	Load transient voltage deviation	$V_I = 53$ V, Load step 25-75-25 % of max I_O , $di/dt = 1$ A/ μs , see Note 2	± 250			mV
t_{tr}	Load transient recovery time		100			μs
t_r	Ramp-up time (from 10–90 % of V_{Oi})	10-100% of max I_O	5	10	15	ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})		10	15	50	ms
I_O	Output current		0		40	A
I_{lim}	Current limit threshold	$V_O = 2.25$ V, $T_{ref} < \text{max } T_{ref}$	52			A
I_{sc}	Short circuit current	$T_{ref} = 25^{\circ}\text{C}$,	62			A
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_O .	50		100	mVp-p
OVP	Over Voltage Protection	$T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, $I_O = 0$ -100% of max I_O	3.4			V

Note 1: When using V_{adj} function, max output power (P_O) must not be exceeded

Note 2: Output filter according to Ripple & Noise section

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W


EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB


2.5 V Typical Characteristics

PKM 4119D PINB


Efficiency

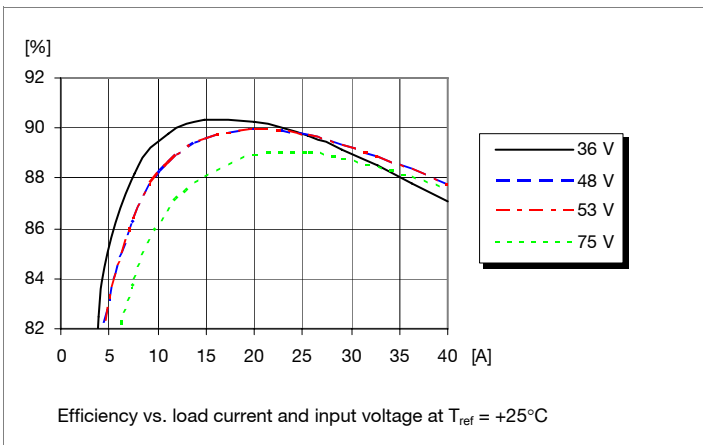




Power Dissipation

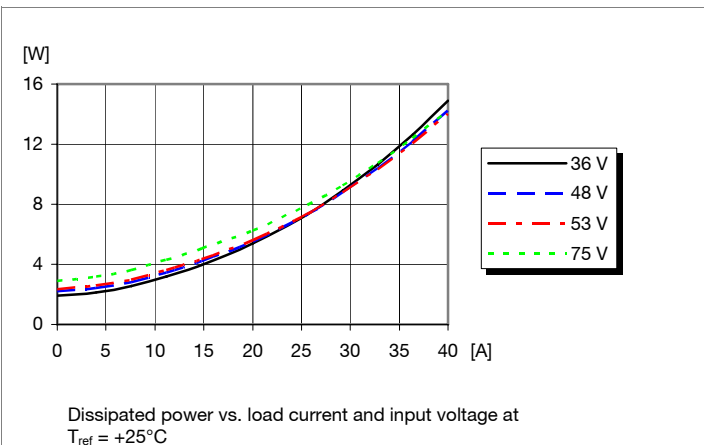

Output Current Derating

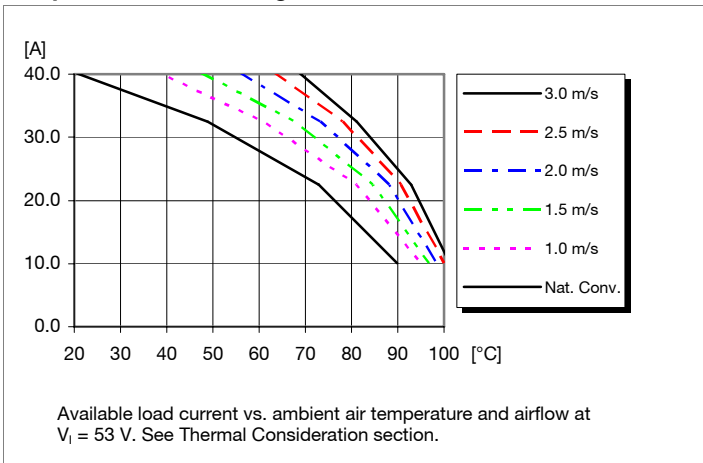

Thermal Resistance

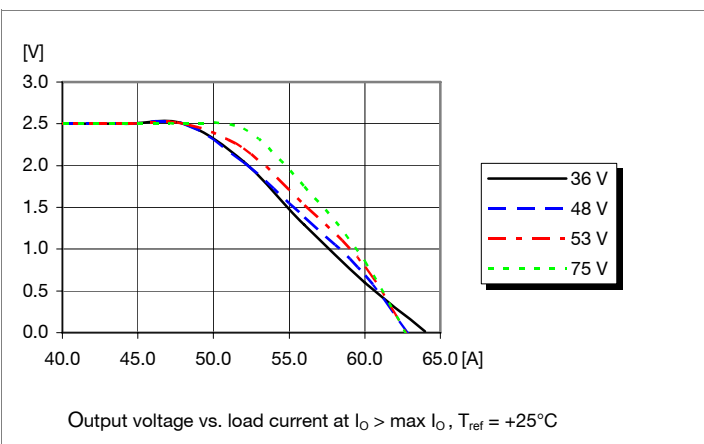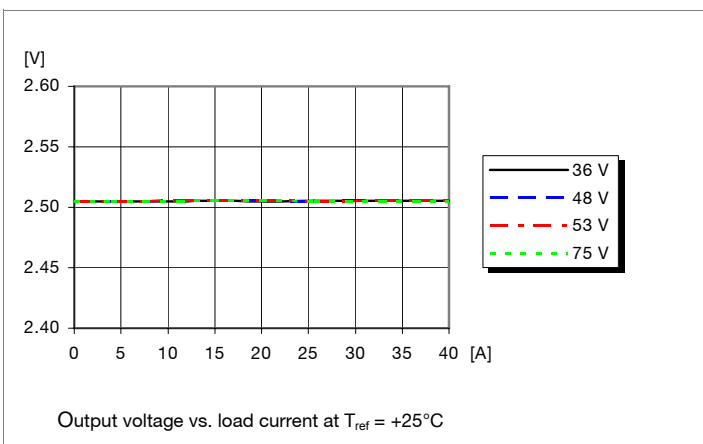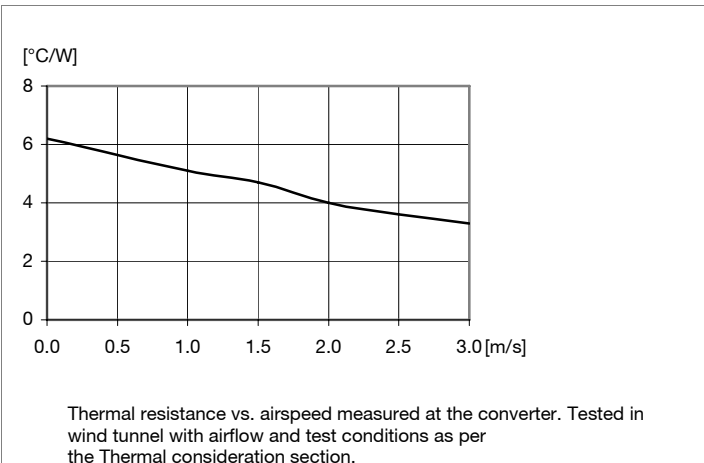

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W


EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

2.5 V Typical Characteristics

PKM 4119D PINB


Start-up

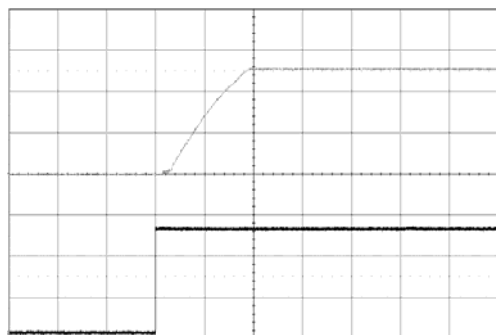

Start-up enabled by connecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_O = 40\text{ A}$ resistive load,
 $V_i = 53\text{ V}$.

Top trace: output voltage (1 V/div.).
Bottom trace: input voltage (20 V/div.).
Time scale: 5 ms/div..


Shut-down

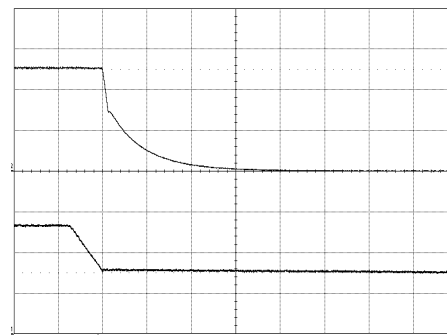

Shut-down enabled by disconnecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_O = 4\text{ A}$ load,
 $V_i = 53\text{ V}$

Top trace: output voltage (1 V/div.).
Bottom trace: input voltage (20 V/div.).
Time scale: 0.1 ms/div..


Output Ripple & Noise

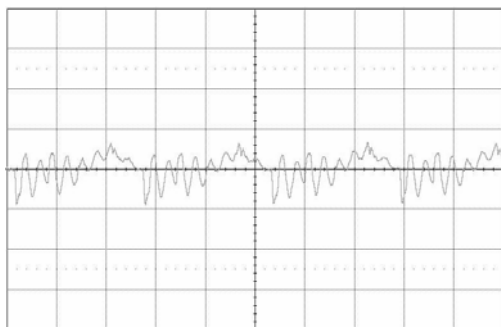

Output voltage ripple (20mV/div.) at:
 $T_{ref} = +25^\circ\text{C}$, $I_O = 40\text{ A}$ resistive load,
 $V_i = 53\text{ V}$. Time scale: 2 μs /div.

See the filter in the Output ripple and noise
section (EMC Specification).

Output Load Transient Response

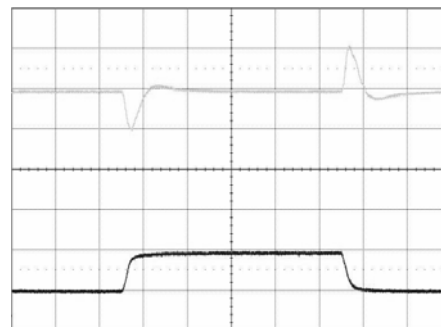

Output voltage response to load current step-
change (10-30-10 A) at:
 $T_{ref} = +25^\circ\text{C}$, $V_i = 53\text{ V}$.

Top trace: output voltage (100mV/div.).
Bottom trace: load current (20 A/div.).
Time scale: {0.1 ms/div.}.

Output Voltage Adjust (see operating information)

Passive trim

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11((2.5(100+\Delta\%))/1.225\Delta\% - (100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

Eg Increase 4% $\Rightarrow V_{out} = 2.6\text{ Vdc}$

$$5.11(2.5(100+4))/1.225 \times 4 - (100+2 \times 4)/4 = 133 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\% - 2) \text{ k}\Omega$$

Eg Decrease 2% $\Rightarrow V_{out} = 2.45\text{ Vdc}$

$$5.11(100/2 - 2) = 245 \text{ k}\Omega$$

The PKM4000D series DC/DC converters can be offered with a baseplate. Baseplate helps to cool hotspots more efficient during heavy load. The baseplate have approximately 5°C improved derating compared to datasheet showing non baseplated PKM4000D. The baseplate is intended to be mounted on a cold wall to transfer heat away from the converter. By mounting PKM4000D in this way thermal derating can be improved by more than 10°C .

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W

EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

3.3 V Electrical Specification

PKM 4110D PINB

$T_{ref} = -40$ to $+90^{\circ}\text{C}$, $V_I = 36$ to 75 V, unless otherwise specified under Conditions.

Typical values given at: $T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, max I_O , unless otherwise specified under Conditions.

Characteristics		Conditions	min	typ	max	Unit
V _I	Input voltage range		36		75	V
V _{Ioff}	Turn-off input voltage	Decreasing input voltage		32		V
V _{Ion}	Turn-on input voltage	Increasing input voltage		34		V
C _I	Internal input capacitance			4.3		μF
P _O	Output power	Output voltage initial setting	0		115.5	W
SVR	Supply voltage rejection (ac)	f = 100 Hz sinewave, 1 Vp-p		55		dB
η	Efficiency	50 % of max I _O		91		%
		max I _O	87.5	89		
		50 % of max I _O , V _I = 48 V		91		
		max I _O , V _I = 48 V		89		
P _d	Power Dissipation	max I _O			16.5	W
P _i	Input idling power	I _O = 0, V _I = 53 V		3.1		W
P _{RC}	Input standby power	V _I = 53 V (turned off with RC)		100		mW
f _s	Switching frequency	0 -100% of max I _O	140	150	160	kHz

V _{Oi}	Output voltage initial setting and accuracy	T _{ref} = +25°C, V _I = 53 V, I _O = max I _O V _{adj} , see Note 1	3.24	3.36	V	
	Output adjust range		2.97	3.63	V	
V _O	Output voltage tolerance band	10-100% of max I _O	3.23	3.37	V	
	Idling voltage	I _O = 0	3.23	3.37	V	
	Line regulation	max I _O		10	mV	
	Load regulation	V _I = 53 V, 1-100% of max I _O		10	mV	
V _{tr}	Load transient voltage deviation	V _I = 53 V, Load step 25-75-25 % of max I _O , di/dt = 1 A/μs, see Note 2	±350		mV	
t _{tr}	Load transient recovery time		100		us	
t _r	Ramp-up time (from 10–90 % of V _{Oi})	10-100% of max I _O	5	10	25	ms
t _s	Start-up time (from V _I connection to 90% of V _O)		5	10	25	ms
I _O	Output current		0	35	A	
I _{lim}	Current limit threshold	V _O = 2.97 V, T _{ref} < max T _{ref}	42		A	
I _{sc}	Short circuit current	T _{ref} = 25°C, V _O = < V _{Onom} * 0.1	50		A	
V _{Oac}	Output ripple & noise	See ripple & noise section, max I _O , V _O .	50	125	mVp-p	
OVP	Over Voltage Protection	T _{ref} = +25°C, V _I = 53 V, I _O = 0-100% of max I _O	4.2		V	

Note 1: When using V_{adj} function, max output power (P_O) must not be exceeded

Note 2: Output filter according to Ripple & Noise section

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W


EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB


3.3 V Typical Characteristics

PKM 4110D PINB


Efficiency

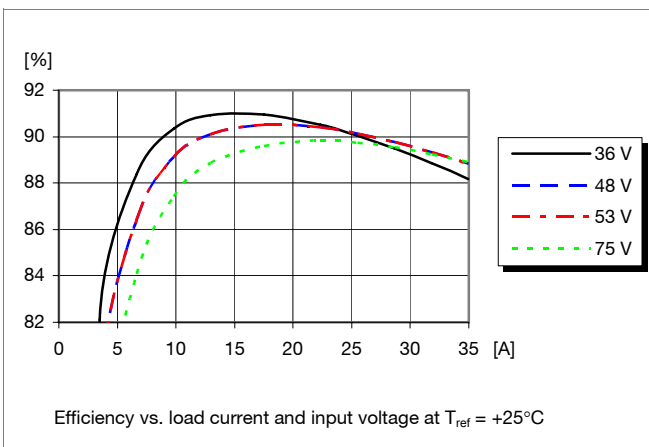




Power Dissipation

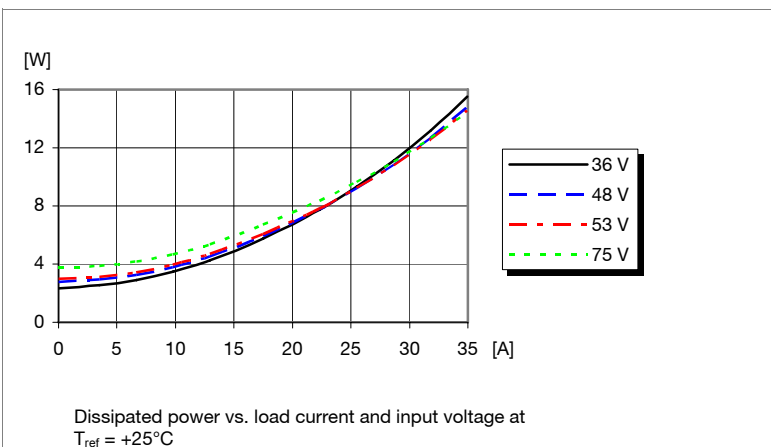

Output Current Derating

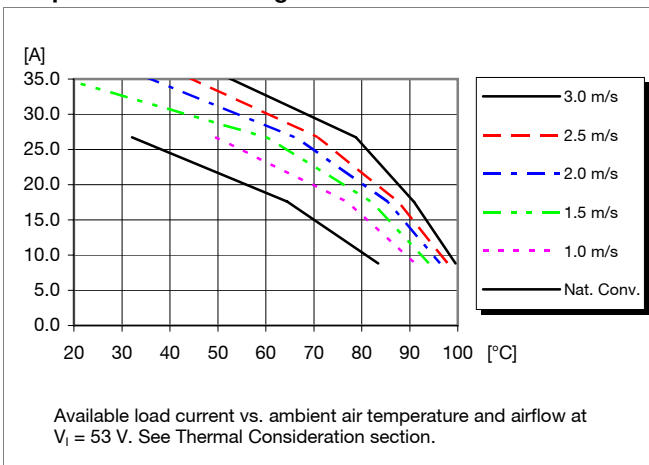

Thermal Resistance

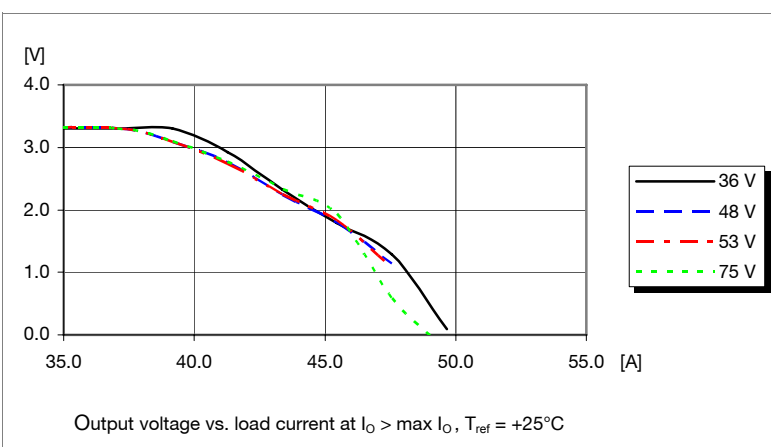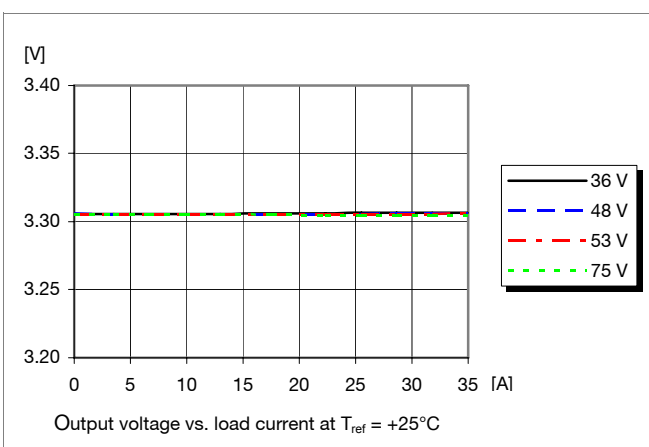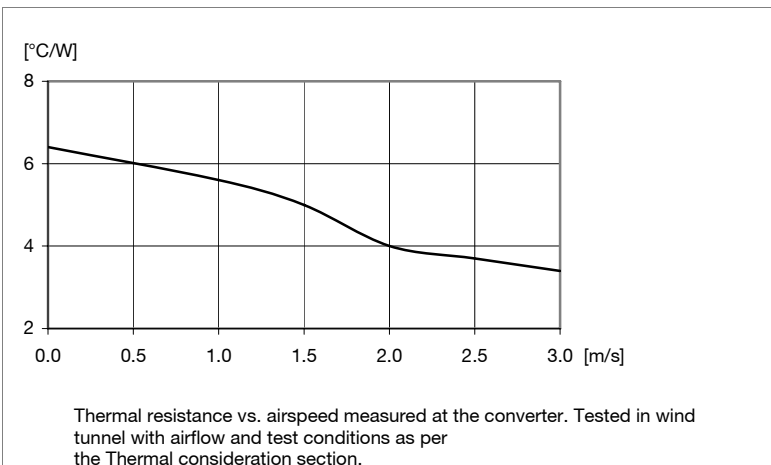

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W


EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

3.3 V Typical Characteristics

PKM 4110D PINB


Start-up

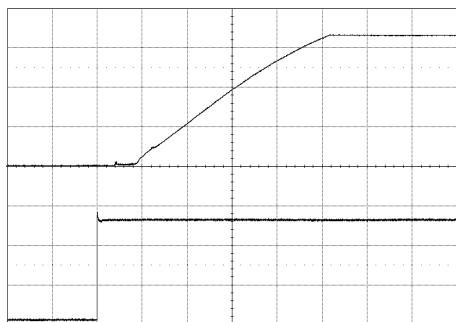

Start-up enabled by connecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 35\text{ A}$ resistive load,
 $V_i = 53\text{ V}$.

Top trace: output voltage (1 V/div.).
Bottom trace: input voltage (20 V/div.).
Time scale: 2 ms/div..


Shut-down

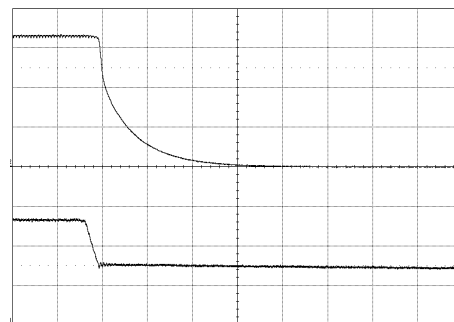

Shut-down enabled by disconnecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 3.5\text{ A}$ load,
 $V_i = 53\text{ V}$

Top trace: output voltage (1 V/div.).
Bottom trace: input voltage (20 V/div.).
Time scale: 0.1 ms/div..


Output Ripple & Noise

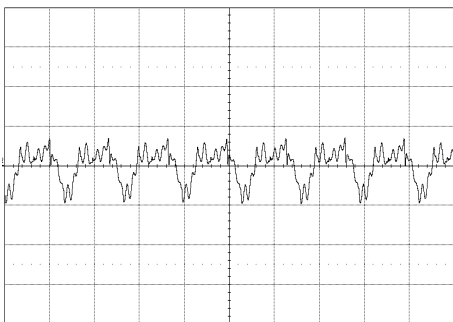

Output voltage ripple (50mV/div.) at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 35\text{ A}$ resistive load,
 $V_i = 53\text{ V}$. Time scale: 5 μs /div.

See the filter in the Output ripple and noise
section (EMC Specification).

Output Load Transient Response

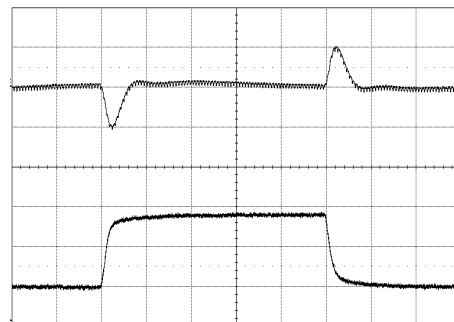

Output voltage response to load current step-
change (8.75-26.25-8.75 A) at:
 $T_{ref} = +25^\circ\text{C}$, $V_i = 53\text{ V}$.

Top trace: output voltage (200mV/div.).
Bottom trace: load current (10 A/div.).
Time scale: {0.1 ms/div.}.

Output Voltage Adjust (see operating information)

Passive trim

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11((3.3(100+\Delta\%))/1.225\Delta\% - (100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

Eg Increase 4% $\Rightarrow V_{out} = 3.43\text{ Vdc}$

$$5.11(3.3(100+4))/1.225 \times 4 - (100+2 \times 4)/4 = 220 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\% - 2) \text{ k}\Omega$$

Eg Decrease 2% $\Rightarrow V_{out} = 3.23\text{ Vdc}$

$$5.11(100/2 - 2) = 245 \text{ k}\Omega$$

The PKM4000D series DC/DC converters can be offered with a baseplate. Baseplate helps to cool hotspots more efficient during heavy load. The baseplate have approximately 5°C improved derating compared to datasheet showing non baseplated PKM4000D. The baseplate is intended to be mounted on a cold wall to transfer heat away from the converter. By mounting PKM4000D in this way thermal derating can be improved by more than 10°C .

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W

EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

5.0 V Electrical Specification

PKM 4111D PINB

$T_{ref} = -40$ to $+90^{\circ}\text{C}$, $V_I = 36$ to 75 V, unless otherwise specified under Conditions.

Typical values given at: $T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, max I_O , unless otherwise specified under Conditions.

Characteristics		Conditions	min	typ	max	Unit
V _I	Input voltage range		36		75	V
V _{Ioff}	Turn-off input voltage	Decreasing input voltage		32		V
V _{Ion}	Turn-on input voltage	Increasing input voltage		34		V
C _I	Internal input capacitance			4.3		μF
P _O	Output power	Output voltage initial setting	0		125	W
SVR	Supply voltage rejection (ac)	f = 100 Hz sinewave, 1 Vp-p		60		dB
η	Efficiency	50 % of max I _O		92		%
		max I _O	89	91		
		50 % of max I _O , V _I = 48 V		92		
		max I _O , V _I = 48 V		91		
P _d	Power Dissipation	max I _O			15.5	W
P _{li}	Input idling power	I _O = 0, V _I = 53 V		3.1		W
P _{RC}	Input standby power	V _I = 53 V (turned off with RC)		100		mW
f _s	Switching frequency	0 -100% of max I _O	180	200	220	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, $I_O = 40.0$ A V_{adj} , see Note 1	4.90	5.00	5.10	V
	Output adjust range		4.50		5.50	V
V_O	Output voltage tolerance band	10-100% of max I_O	4.80		5.20	V
	Idling voltage	$I_O = 0$	4.80		5.20	V
	Line regulation	max I_O			15	mV
	Load regulation	$V_I = 53$ V, 1-100% of max I_O			15	mV
V_{tr}	Load transient voltage deviation	$V_I = 53$ V, Load step 25-75-25 % of max I_O , $di/dt = 1$ A/ μs , see Note 2	± 500			mV
t_{tr}	Load transient recovery time		100			Us
t_r	Ramp-up time (from 10-90 % of V_{Oj})	10-100% of max I_O	6	13	30	ms
t_s	Start-up time (from V_I connection to 90% of V_{Oj})		9	15	50	ms
I_O	Output current		0		25	A
I_{lim}	Current limit threshold	$V_O = 4.5$ V, $T_{ref} < \max T_{ref}$	30			A
I_{sc}	Short circuit current	$T_{ref} = 25^{\circ}\text{C}$, $V_O = < V_{Onom} * 0.1$	40			A
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_O .	60		150	mVp-p
OVP	Over Voltage Protection	$T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, $I_O = 0$ -100% of max I_O	6.2			V

Note 1: When using V_{adj} function, max output power (P_O) must not be exceeded

Note 2: Output filter according to Ripple & Noise section

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W


EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

5.0 V Typical Characteristics


PKM 4111D PINB

Efficiency

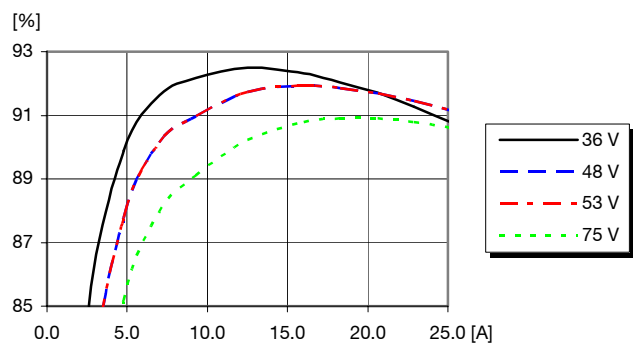


Efficiency vs. load current and input voltage at $T_{ref} = +25^{\circ}\text{C}$

Power Dissipation

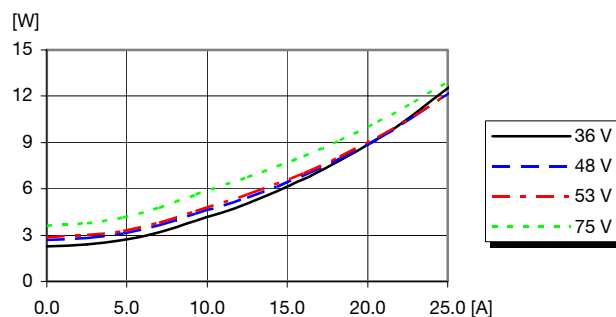


Dissipated power vs. load current and input voltage at $T_{ref} = +25^{\circ}\text{C}$

Output Current Derating

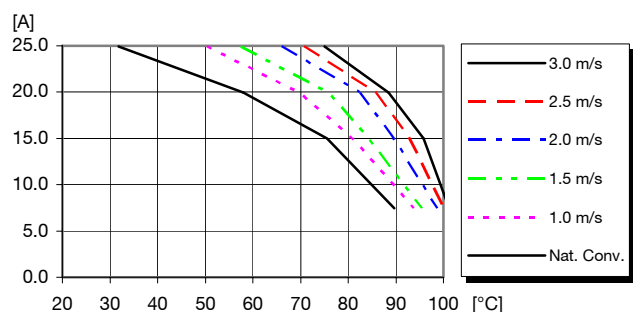


Available load current vs. ambient air temperature and airflow at $V_i = 53\text{ V}$. See Thermal Consideration section.

Thermal Resistance

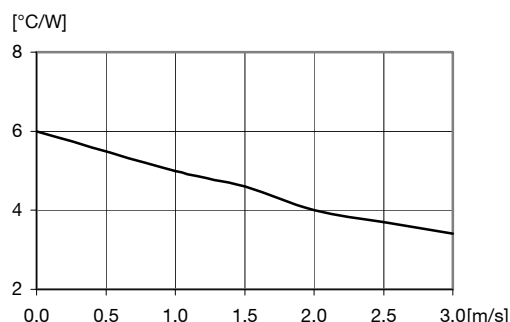


Thermal resistance vs. airspeed measured at the converter. Tested in wind tunnel with airflow and test conditions as per the Thermal consideration section.

Output Characteristics

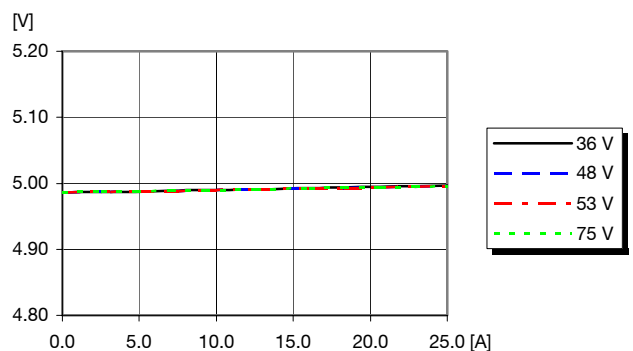

Output voltage vs. load current at $T_{ref} = +25^{\circ}\text{C}$

Current Limit Characteristics

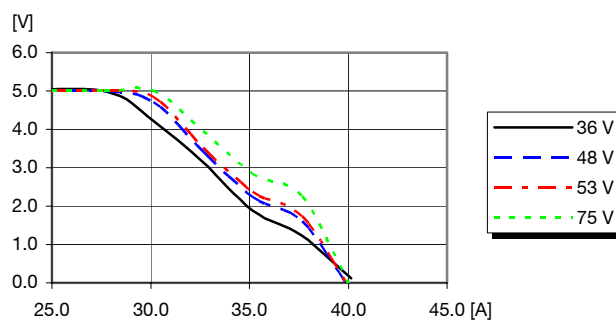

Output voltage vs. load current at $I_o > \max I_o$, $T_{ref} = +25^{\circ}\text{C}$

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W


EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

5.0 V Typical Characteristics

PKM 4111D PINB


Start-up

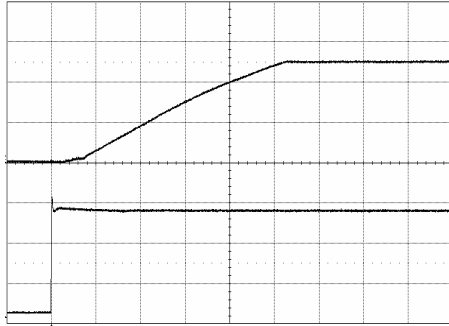

Start-up enabled by connecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_O = 25\text{ A}$ resistive load,
 $V_i = 53\text{ V}$.

Top trace: output voltage (2 V/div.).
Bottom trace: input voltage (20 V/div.).
Time scale: 2 ms/div..


Shut-down

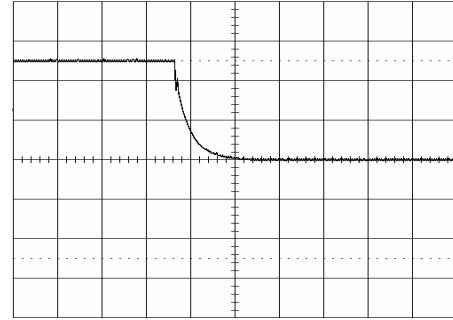

Shut-down enabled by disconnecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_O = 2.5\text{ A}$ resistive load,

Output voltage: 2 V/div
Time scale: 2 ms/div.


Output Ripple & Noise

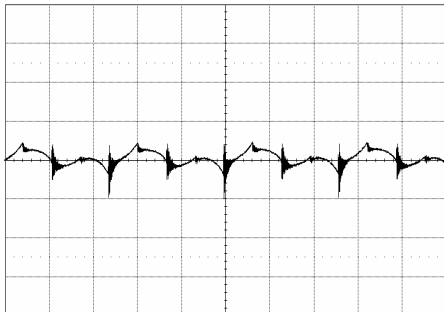

Output voltage ripple (50mV/div.) at:
 $T_{ref} = +25^\circ\text{C}$, $I_O = 25\text{ A}$ resistive load,
 $V_i = \{53\text{ V}\}$. Time scale: 2 μs/div.

See the filter in the Output ripple and noise
section (EMC Specification).

Output Load Transient Response

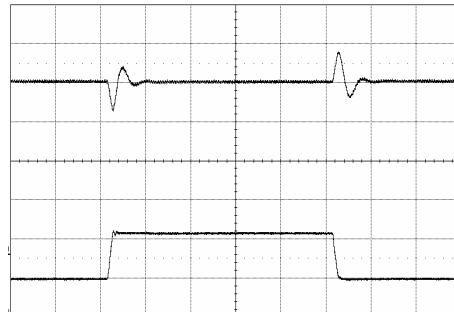

Output voltage response to load current step-
change (6.25-18.75-635 A) at:
 $T_{ref} = +25^\circ\text{C}$, $V_i = 53\text{ V}$.

Top trace: output voltage (500mV/div.).
Bottom trace: load current (10 A/div.).
Time scale: {0.1 ms/div.}.

Output Voltage Adjust (see operating information)

Passive trim

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11((5(100+\Delta\%))/1.225\Delta\% - (100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

Eg Increase 4% $\Rightarrow V_{out} = 5.2\text{ Vdc}$

$$5.11(5(100+4)/1.225 \times 4 - (100+2 \times 4)/4) = 404 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\% - 2) \text{ k}\Omega$$

Eg Decrease 2% $\Rightarrow V_{out} = 4.90\text{ Vdc}$

$$5.11(100/2 - 2) = 245 \text{ k}\Omega$$

The PKM4000D series DC/DC converters can be offered with a baseplate. Baseplate helps to cool hotspots more efficient during heavy load. The baseplate have approximately 5°C improved derating compared to datasheet showing non baseplated PKM4000D. The baseplate is intended to be mounted on a cold wall to transfer heat away from the converter. By mounting PKM4000D in this way thermal derating can be improved by more than 10°C .

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W

EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

6.0 V/20 A Electrical Specification

PKM 4117VD PINB

$T_{ref} = -40$ to $+90^{\circ}\text{C}$, $V_I = 36$ to 75 V, sense pins connected to output pins unless otherwise specified under Conditions.

Typical values given at: $T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, $I_O = \text{max } I_O$, unless otherwise specified under Conditions.

Characteristics		Conditions	min	typ	max	Unit
V _I	Input voltage range		36		75	V
V _{Ioff}	Turn-off input voltage	Decreasing input voltage	30	31.4	33	V
V _{Ion}	Turn-on input voltage	Increasing input voltage	33	33.9	35	V
C _I	Internal input capacitance			4.3		μF
P _O	Output power	Output voltage initial setting	0		120	W
η	Efficiency	50 % of max I _O		91.5		%
		max I _O		92.0		
		50 % of max I _O , V _I = 48 V		91.8		
		max I _O , V _I = 48 V		92.1		
P _d	Power Dissipation	max I _O		10.4		W
P _{li}	Input idling power	I _O = 0 A, V _I = 53 V		3.7		W
P _{RC}	Input standby power	V _I = 53 V (turned off with RC)				W
f _s	Switching frequency	0-100 % of max I _O	180	200	220	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, $I_O = 20$ A	5.88	6.00	6.12	V
V_O	Output adjust range	See operating information	5.40			V
	Output voltage tolerance band	10-100 % of max I_O	5.76		6.24	V
	Idling voltage	$I_O = 0$ A	5.76		6.24	V
	Line regulation	max I_O		2.6	15	mV
	Load regulation	$V_I = 53$ V, 0-100 % of max I_O		3.3	15	mV
V_{tr}	Load transient voltage deviation	$V_I = 53$ V, Load step 25-75-25 % of max I_O , $di/dt = 1$ A/ μs		± 500		mV
t_{tr}	Load transient recovery time			139		μs
t_r	Ramp-up time (from 10-90 % of V_{Oi})	10-100 % of max I_O		6	30	ms
t_s	Start-up time (from V_I connection to 90 % of V_{Oi})			8	50	ms
t_f	V_I shut-down fall time (from V_I off to 10 % of V_O)	max I_O		200		ms
		$I_O = 0$ A		12		s
t_{RC}	RC start-up time	max I_O		8		ms
	RC shut-down fall time (from RC off to 10 % of V_O)	max I_O		255		ms
		$I_O = 0$ A		12		s
I_O	Output current		0		20	A
I_{lim}	Current limit threshold	$T_{ref} < \text{max } T_{ref}$		30		A
I_{sc}	Short circuit current	$T_{ref} = 25^{\circ}\text{C}$		40		A
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{Oi}		45		mVp-p
OVP	Over voltage protection	$T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, 0-100 % of max I_O		7.30		V

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W


EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

6.0 V/20 A Typical Characteristics


PKM 4117VD PINB

Efficiency

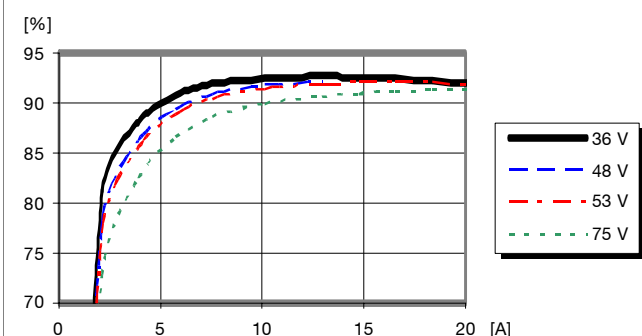


Efficiency vs. load current and input voltage at $T_{ref} = +25^{\circ}\text{C}$

Power Dissipation

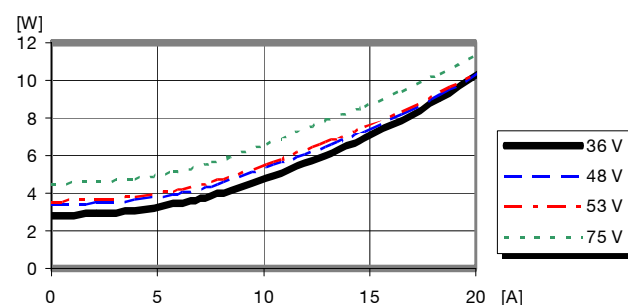


Dissipated power vs. load current and input voltage at $T_{ref} = +25^{\circ}\text{C}$

Output Current Derating

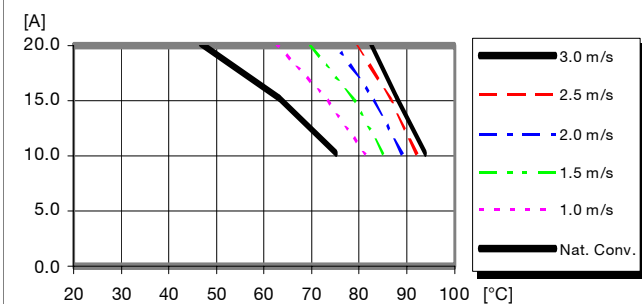


Available load current vs. ambient air temperature and airflow at $V_i = 53\text{ V}$. See Thermal Consideration section.

Thermal Resistance

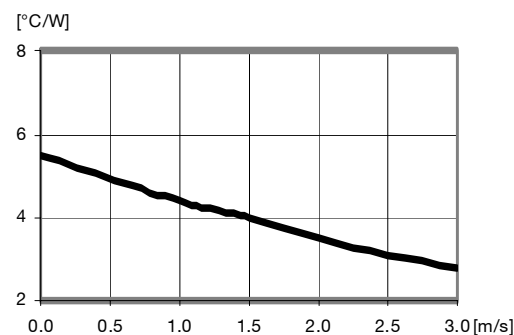


Thermal resistance vs. airspeed measured at the converter. Tested in wind tunnel with airflow and test conditions as per the Thermal consideration section. $V_i = 53\text{ V}$.

Output Characteristics

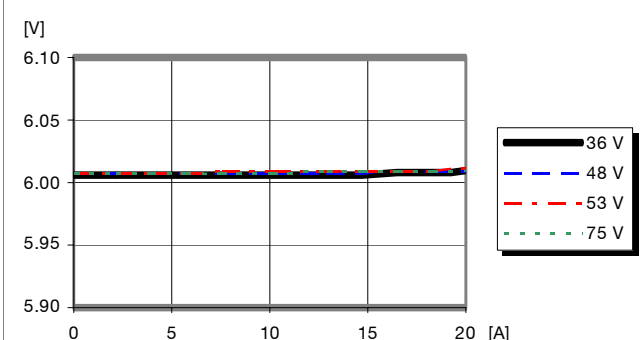

Output voltage vs. load current at $T_{ref} = +25^{\circ}\text{C}$

Current Limit Characteristics

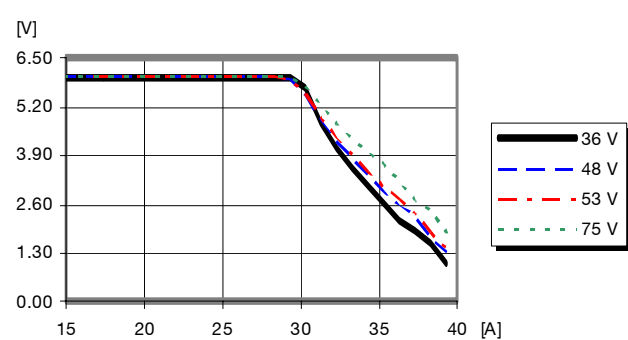


Output voltage vs. load current at $I_o > \max I_o$, $T_{ref} = +25^{\circ}\text{C}$

PKM 4000D PINB Series DC/DC converters, Input 36-75 V, Output 40 A/132 W	EN/LZT 146 306 R4A July 2008
	© Ericsson Power Modules AB


6.0 V/20 A Typical Characteristics

PKM 4117VD PINB


Start-up

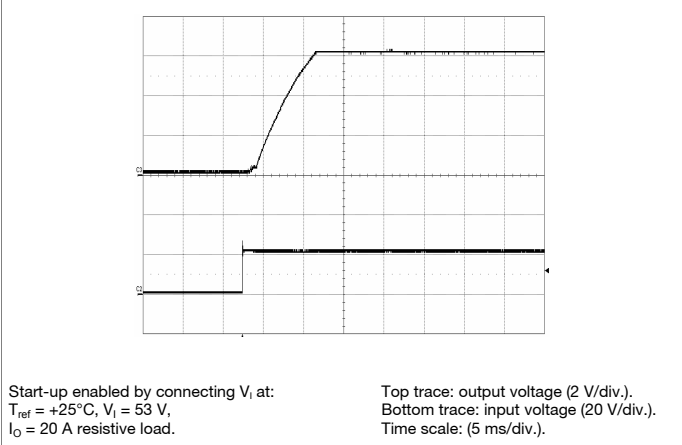


Shut-down

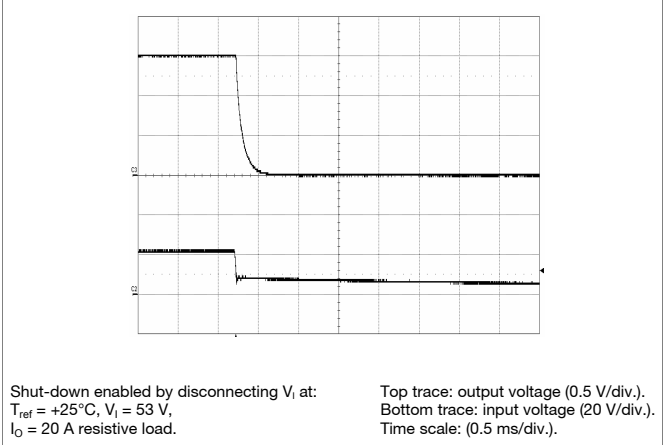

Output Ripple & Noise

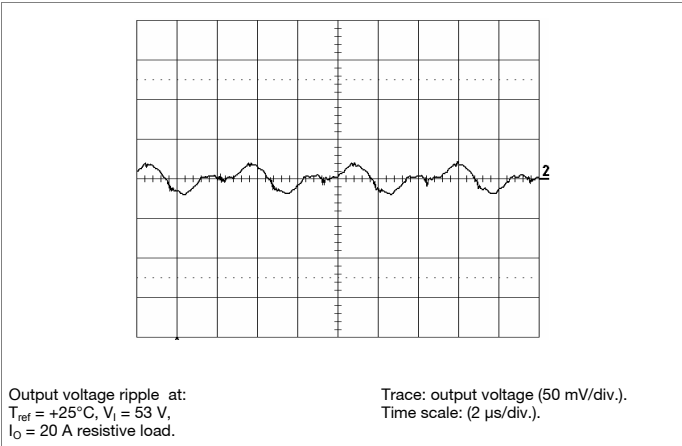

Output Load Transient Response

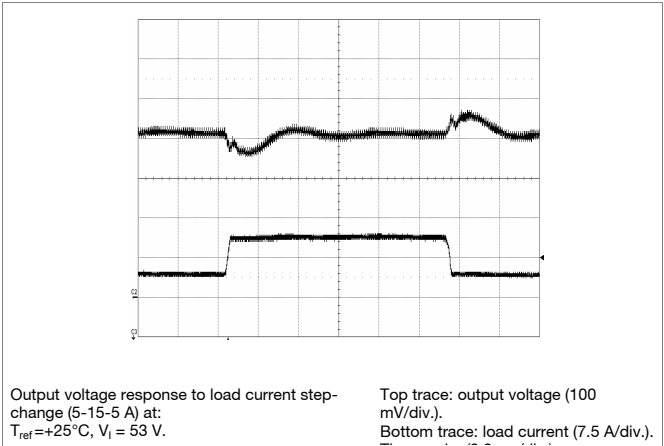

Output Voltage Adjust (see operating information)

Passive adjust
The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Downwards, Decrease:
 $R_{adj} = 5.11(100/\Delta\% - 2)\text{ k}\Omega$

Example: Decrease 2% $\Rightarrow V_{out} = 5.88\text{ Vdc}$
 $5.11(100/2 - 2) = 245\text{ k}\Omega$

PKM 4000D PINB Series
 DC/DC converters, Input 36-75 V, Output 40 A/132 W

EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

7.2 V Electrical Specification
PKM 4116D PINB
 $T_{ref} = -40$ to $+90^{\circ}\text{C}$, $V_I = 36$ to 75 V, unless otherwise specified under Conditions.

 Typical values given at: $T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, max I_O , unless otherwise specified under Conditions.

Characteristics		Conditions	min	typ	max	Unit
V _I	Input voltage range		36		75	V
V _{Ioff}	Turn-off input voltage	Decreasing input voltage		31		V
V _{Ion}	Turn-on input voltage	Increasing input voltage		34		V
C _I	Internal input capacitance			4.3		μF
P _O	Output power	Output voltage initial setting	0		108	W
SVR	Supply voltage rejection (ac)	f = 100 Hz sinewave, 1 Vp-p		60		dB
η	Efficiency	50 % of max I _O		92.6		%
		max I _O , V _I = 53 V ,T _{ref} = +25°C	91	91.6		
		50 % of max I _O , V _I = 48 V		92.8		
		max I _O , V _I = 48 V		91.5		
P _d	Power Dissipation	max I _O ,V _I = 53 V ,T _{ref} = +25°C			10.7	W
P _{li}	Input idling power	I _O = 0, V _I = 53 V		1.8		W
P _{RC}	Input standby power	V _I = 53 V (turned off with RC)		108		mW
f _s	Switching frequency	0 -100% of max I _O	180	200	220	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, $I_O = \text{max } I_O$ Vadj, see Note 1	7.06		7.34	V
	Output adjust range		6.48		7.92	V
V_O	Output voltage tolerance band	10-100% of max I_O	6.99		7.41	V
	Idling voltage	$I_O = 0$	6.99		7.41	V
	Line regulation	max I_O			20	mV
	Load regulation	$V_I = 53$ V, 1-100% of max I_O			10	mV
V_{tr}	Load transient voltage deviation	$V_I = 53$ V, Load step 25-75-25 % of max I_O , $di/dt = 1$ A/ μs , see Note 2	± 340			mV
t_{tr}	Load transient recovery time		135			us
t_r	Ramp-up time (from 10-90 % of V_{Oi})	10-100% of max I_O	4	7	25	ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})		5	9	25	ms
I_O	Output current		0		15	A
I_{lim}	Current limit threshold	$V_O = 6.48$ V, $T_{ref} < \text{max } T_{ref}$	17			A
I_{sc}	Short circuit current	$T_{ref} = 25^{\circ}\text{C}$, $V_O = < V_{Onom} * 0.1$	21			A
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_O .	35		70	mVp-p
OVP	Over Voltage Protection	$T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, $I_O = 0$ -100% of max I_O	9.5			V

 Note 1: When using Vadj function, max output power (P_O) must not be exceeded

Note 2: Output filter according to Ripple & Noise section

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W


EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB


7.2 V Typical Characteristics

PKM 4116D PINB


Efficiency

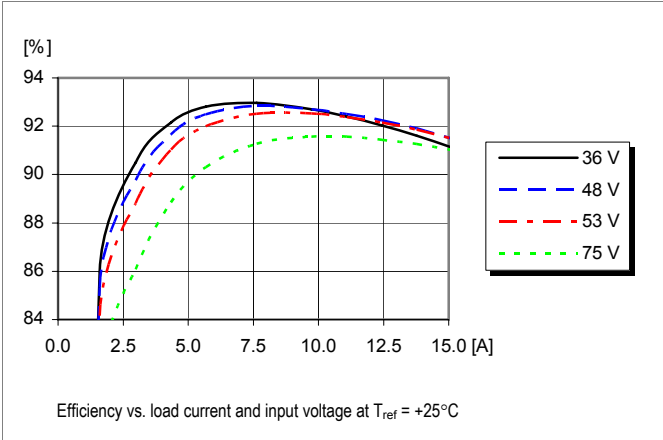


Power Dissipation

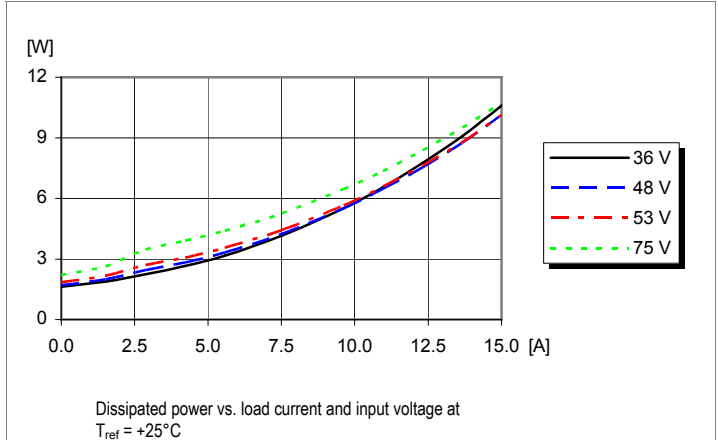


Output Current Derating

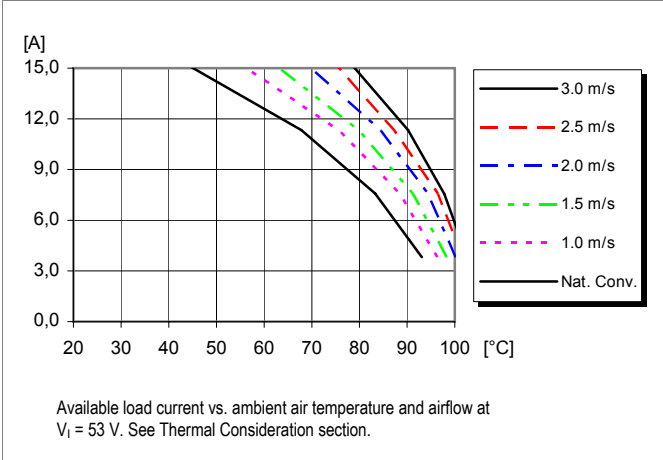


Thermal Resistance

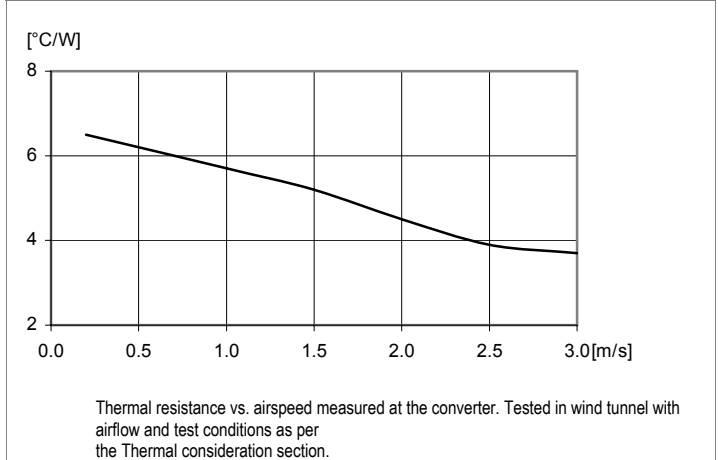

Output Characteristics

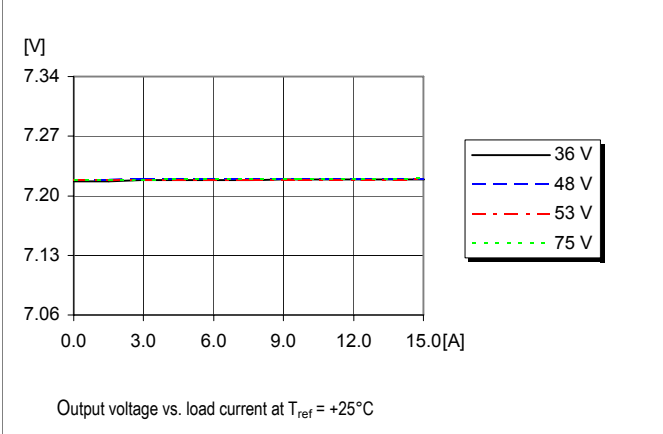

Current Limit Characteristics

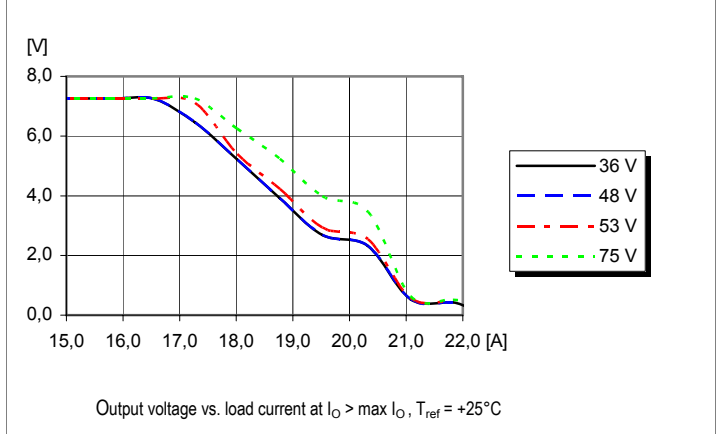

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W


EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB


7.2 V Typical Characteristics

PKM 4116D PINB


Start-up

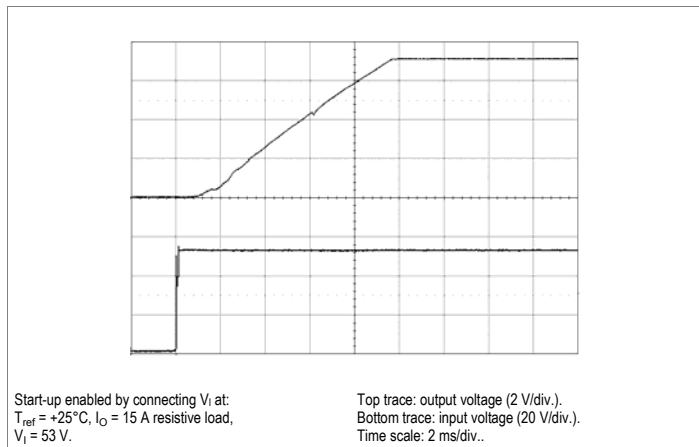


Shut-down

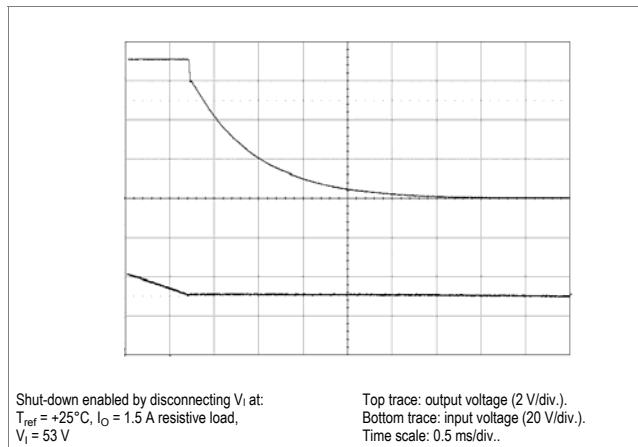

Output Ripple & Noise

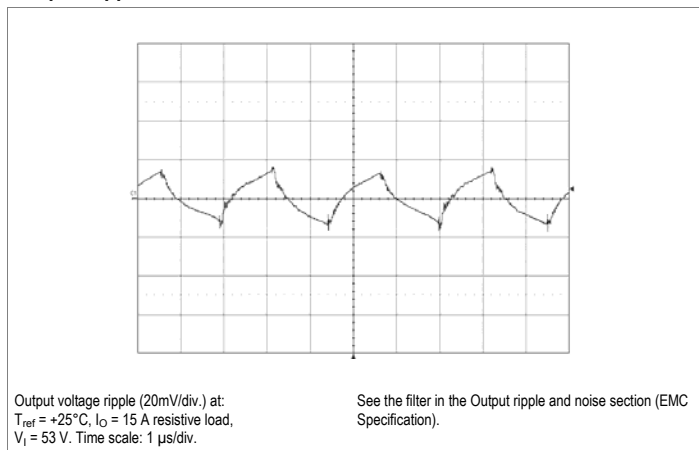

Output Load Transient Response

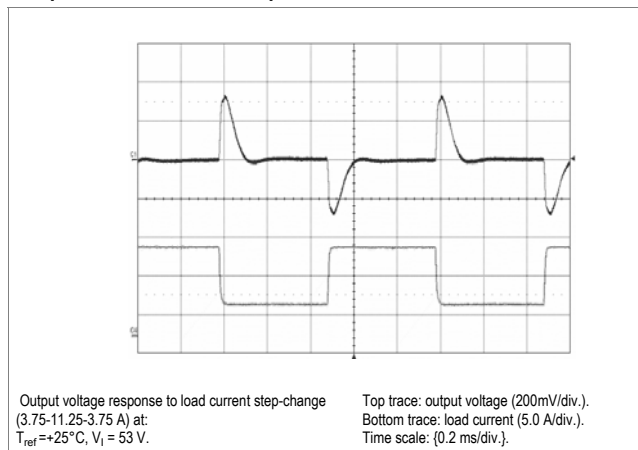

Output Voltage Adjust (see operating information)

Passive trim

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11((7.2(100+\Delta\%))/1.225\Delta\% - (100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

Eg Increase 4% $\Rightarrow V_{out} = 7.488\text{ Vdc}$

$$5.11(7.2(100+4)/1.225 \times 4 - (100+2 \times 4)/4) = 642 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\% - 2) \text{ k}\Omega$$

Eg Decrease 2% $\Rightarrow V_{out} = 7.056\text{ Vdc}$

$$5.11(100/2 - 2) = 245 \text{ k}\Omega$$

The PKM4000D series DC/DC converters can be offered with a baseplate. Baseplate helps to cool hotspots more efficient during heavy load. The baseplate have approximately 5°C improved derating compared to datasheet showing non baseplated PKM4000D. The baseplate is intended to be mounted on a cold wall to transfer heat away from the converter. By mounting PKM4000D in this way thermal derating can be improved by more than 10°C .

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W

EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

12 V Electrical Specification

PKM 4113D PINB

$T_{ref} = -40$ to $+90^{\circ}\text{C}$, $V_I = 38$ to 75 V, unless otherwise specified under Conditions.

Typical values given at: $T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, max I_O , unless otherwise specified under Conditions.

Characteristics		Conditions	min	typ	max	Unit
V _I	Input voltage range		38		75	V
V _{Ioff}	Turn-off input voltage	Decreasing input voltage		31		V
V _{Ion}	Turn-on input voltage	Increasing input voltage		33		V
C _I	Internal input capacitance			4.3		μF
P _O	Output power	Output voltage initial setting	0		132	W
SVR	Supply voltage rejection (ac)	f = 100 Hz sinewave, 1 Vp-p		68		dB
η	Efficiency	50 % of max I _O		93.6		%
		max I _O	92.5	94.0		
		50 % of max I _O , V _I = 48 V		93.8		
		max I _O , V _I = 48 V		93.9		
P _d	Power Dissipation	max I _O			10.7	W
P _{ii}	Input idling power	I _O = 0, V _I = 53 V		2.5		W
P _{RC}	Input standby power	V _I = 53 V (turned off with RC)		100		mW
f _s	Switching frequency	0 -100% of max I _O	180	200	220	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, $I_O = 11.0$ A V_{adj} , see Note 1	11.8	12.0	12.2	V
	Output adjust range		10.8		13.2	V
V_O	Output voltage tolerance band	10-100% of max I_O	11.7		12.3	V
	Idling voltage	$I_O = 0$	11.8		12.2	V
	Line regulation	max I_O			50	mV
	Load regulation	$V_I = 53$ V, 1-100% of max I_O			20	mV
V_{tr}	Load transient voltage deviation	$V_I = 53$ V, Load step 25-75-25 % of max I_O , $di/dt = 1$ A/ μs , see Note 1	± 600			mV
t_{tr}	Load transient recovery time		100			μs
t_r	Ramp-up time (from 10–90 % of V_{Oi})	10-100% of max I_O	5	8	20	ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})		7	10	50	ms
I_O	Output current		0		11	A
I_{lim}	Current limit threshold	$V_O = 10.8$ V, $T_{ref} < \max T_{ref}$	14.5			A
I_{sc}	Short circuit current	$T_{ref} = 25^{\circ}\text{C}$, $V_O = < V_{Onom} * 0.1$	18.5			A
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_O .	100		200	mVp-p
OVP	Over Voltage Protection	$T_{ref} = +25^{\circ}\text{C}$, $V_I = 53$ V, $I_O = 0$ -100% of max I_O	14.5			V

Note 1: When using V_{adj} function, max output power (P_O) must not be exceeded

Note 2: Output filter according to Ripple & Noise section

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W


EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

12.0 V Typical Characteristics


PKM 4113D PINB

Efficiency

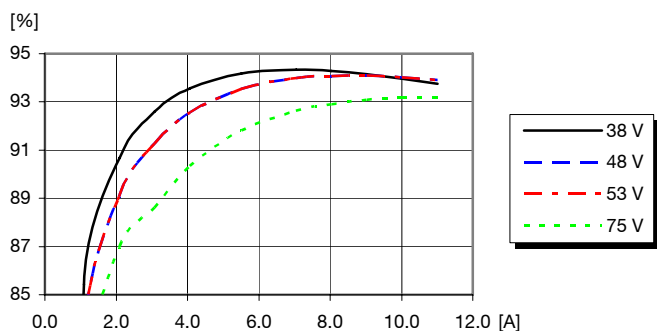


Efficiency vs. load current and input voltage at $T_{ref} = +25^{\circ}\text{C}$

Power Dissipation

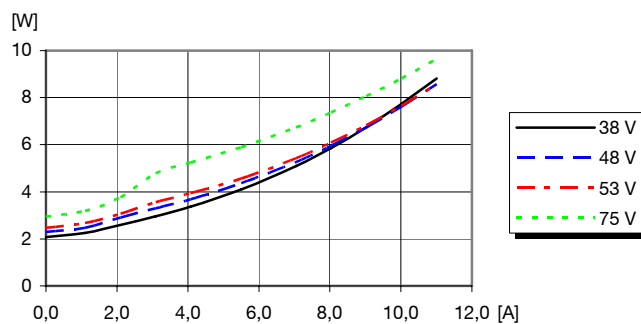


Dissipated power vs. load current and input voltage at $T_{ref} = +25^{\circ}\text{C}$

Output Current Derating

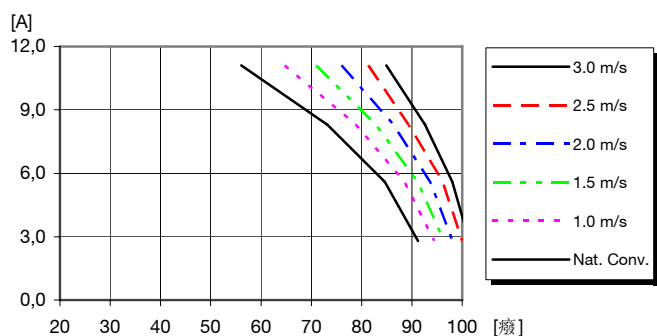


Available load current vs. ambient air temperature and airflow at $V_i = 53\text{ V}$. See Thermal Consideration section.


Thermal Resistance

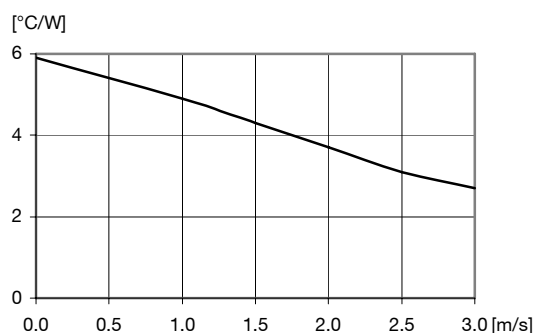

Thermal resistance vs. airspeed measured at the converter. Tested in wind tunnel with airflow and test conditions as per the Thermal consideration section.

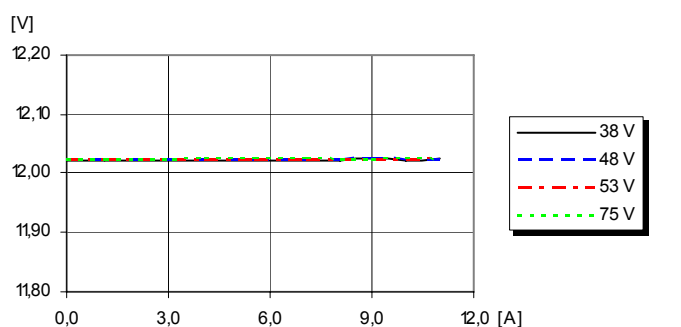

Output voltage vs. load current at $T_{ref} = +25^{\circ}\text{C}$

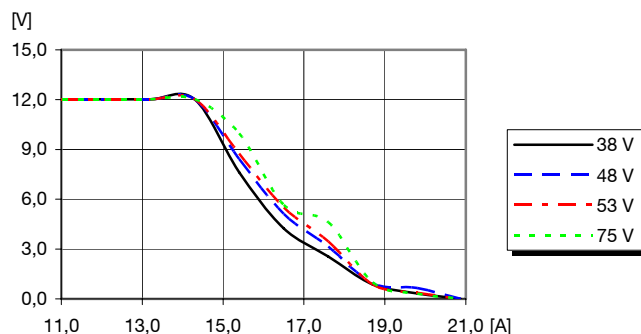

Output voltage vs. load current at $I_O > \max I_O$, $T_{ref} = +25^{\circ}\text{C}$

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W


EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

12.0 V Typical Characteristics

PKM 4113D PINB


Start-up

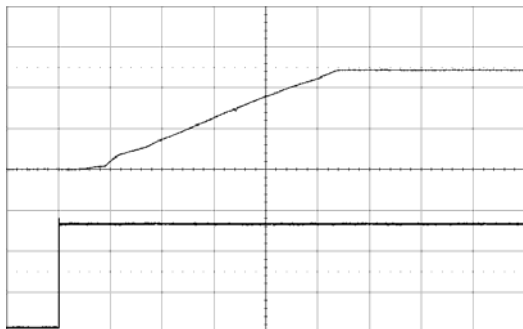

Start-up enabled by connecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 11\text{ A}$ resistive load,
 $V_i = 53\text{ V}$.

Top trace: output voltage (5 V/div.).
Bottom trace: input voltage (20 V/div.).
Time scale: 2 ms/div..


Shut-down

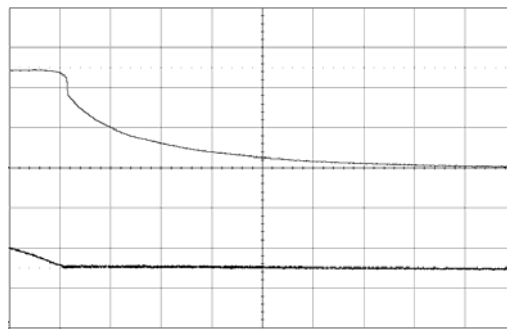

Shut-down enabled by disconnecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 1.1\text{ A}$ resistive load,
 $V_i = 53\text{ V}$.

Top trace: output voltage (5 V/div.). Bottom
trace: input voltage (20 V/div.).
Time scale: 0.5 ms/div..


Output Ripple & Noise

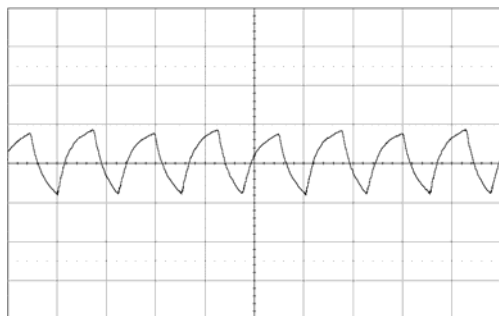

Output voltage ripple (50mV/div.) at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 11\text{ A}$ resistive load,
 $V_i = 53\text{ V}$. Time scale: 2 μs /div.

See the filter in the Output ripple and noise
section (EMC Specification).

Output Load Transient Response

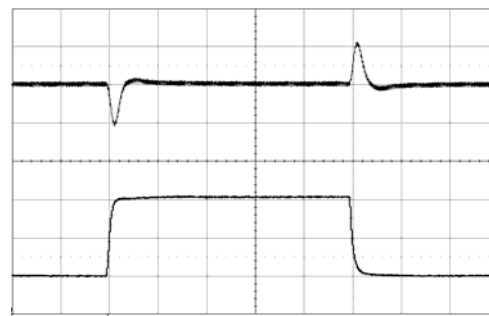

Output voltage response to load current step-
change (2.75-8.25-2.75 A) at:
 $T_{ref} = +25^\circ\text{C}$, $V_i = 53\text{ V}$.

Top trace: output voltage (500mV/div.).
Bottom trace: load current (2.75 A/div.).
Time scale: {0.1 ms/div.}.

Output Voltage Adjust (see operating information)

Passive trim

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11((12(100+\Delta\%))/1.225\Delta\% - (100+2\Delta\%)/\Delta\%) \text{ k}\Omega$$

Eg Increase 4% $\Rightarrow V_{out} = 12.48\text{ Vdc}$

$$5.11(12(100+4))/1.225 \times 4 - (100+2 \times 4)/4 = 404 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\% - 2) \text{ k}\Omega$$

Eg Decrease 2% $\Rightarrow V_{out} = 11.76\text{ Vdc}$

$$5.11(100/2 - 2) = 245 \text{ k}\Omega$$

The PKM4000D series DC/DC converters can be offered with a baseplate. Baseplate helps to cool hotspots more efficient during heavy load. The baseplate have approximately 5°C improved derating compared to datasheet showing non baseplated PKM4000D. The baseplate is intended to be mounted on a cold wall to transfer heat away from the converter. By mounting PKM4000D in this way thermal derating can be improved by more than 10°C .

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W

EN/LZT 146 306 R4A July 2008


© Ericsson Power Modules AB

EMC Specification

Conducted EMI measured according to EN55022, CISPR 22 and FCC part 15J (see test set-up).

The fundamental switching frequency is 200 kHz for PKM 4110D PINB @ $V_I = 53$ V, max I_O .



Conducted EMI Input terminal value (typ)

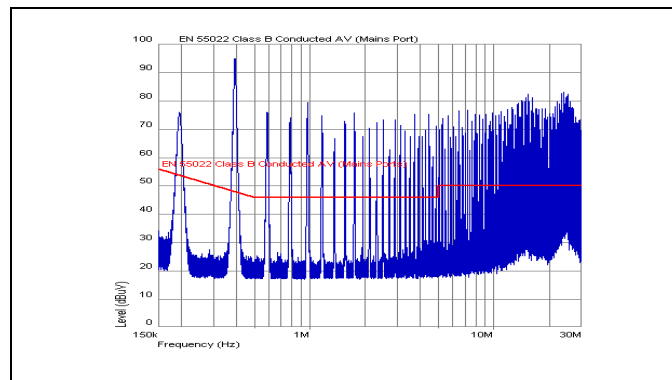


EMI without filter

External filter (class B)

Required external input filter in order to meet class B in EN 55022, CISPR 22 and FCC part 15J.

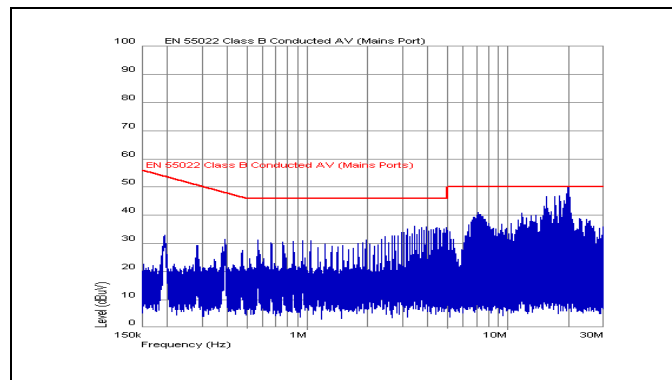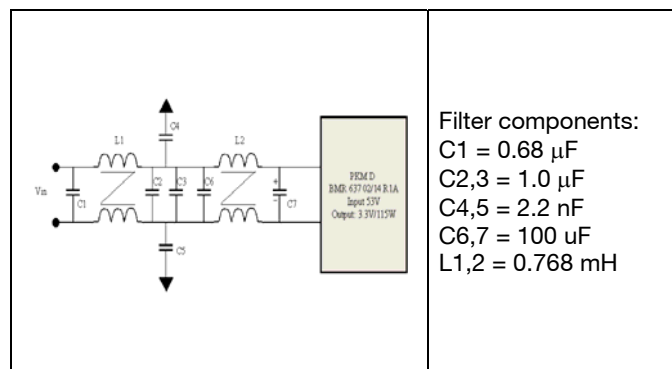

EMI with filter

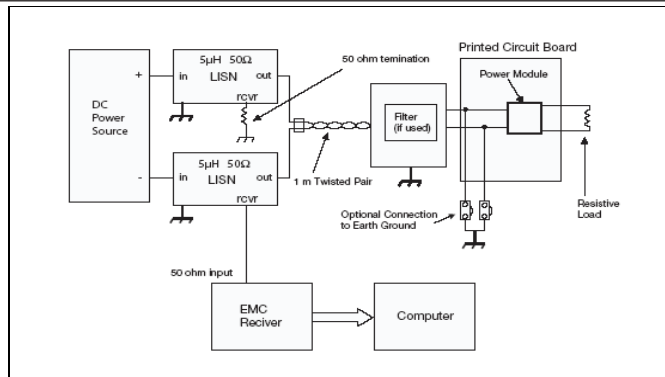

Test set-up


Layout recommendation

The radiated EMI performance of the DC/DC converter will depend on the PCB layout and ground layer design. It is also important to consider the stand-off of the DC/DC converter. If a ground layer is used, it should be connected to the output of the DC/DC converter and the equipment ground or chassis.

A ground layer will increase the stray capacitance in the PCB and improve the high frequency EMC performance.

Output ripple and noise

Output ripple and noise measured according to figure below. See Design Note 022 for detailed information.

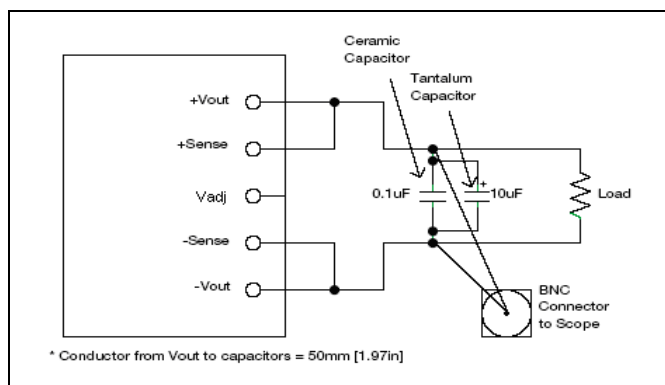

Output ripple and noise test setup

PKM 4000D PINB Series

DC/DC converters, Input 36-75 V, Output 40 A/132 W

EN/LZT 146 306 R4A July 2008


© Ericsson Power Modules AB

Operating information
Input Voltage

The input voltage range 36 to 75Vdc meets the requirements of the European Telecom Standard ETS 300 132-2 for normal input voltage range in -48 and -60 Vdc systems, -40.5 to -57.0 V and -50.0 to -72 V respectively. At input voltages exceeding 75 V, the power loss will be higher than at normal input voltage and T_{ref} must be limited to absolute max +110°C. The absolute maximum continuous input voltage is 80Vdc.

Turn-off Input Voltage

The PKM 4000D Series DC/DC converters monitor the input voltage and will turn on and turn off at predetermined levels. The minimum hysteresis between turn on and turn off input voltage is 1 V.

Remote Control (RC)


The products are fitted with a remote control function referenced to the primary negative input connection (- In), with negative and positive logic options available. The RC function allows the converter to be turned on/off by an external device like a semiconductor or mechanical switch. The RC pin has an internal pull up resistor to + In.

The maximum required sink current is 1 mA. When the RC pin is left open, the voltage generated on the RC pin is 3.5 – 6.0 V.

The second option is “positive logic” remote control, which can be ordered by adding the suffix “P” to the end of the part number. The converter will turn on when the input voltage is applied with the RC pin open. Turn off is achieved by connecting the RC pin to the - In. To ensure safe turn off the voltage difference between RC pin and the - In pin shall be less than 1V. The converter will restart automatically when this connection is opened.

See Design Note 021 for detailed information.

Input and Output Impedance

The impedance of both the power source and the load will interact with the impedance of the DC/DC converter. It is most important to have a low characteristic impedance, both at the input and output, as the converters have a low energy storage capability. The PKM 4000D Series DC/DC converters have been designed to be completely stable without the need for external capacitors on the input or the output circuits. The performance in some applications can be enhanced by addition of external capacitance as described under maximum capacitive load. If the distribution of the input voltage source to the converter contains significant inductance, the addition of a 100µF capacitor across the input of the converter will help insure stability. This capacitor

is not required when powering the DC/DC converter from a low impedance source with short, low inductance, input power leads.

External Decoupling Capacitors

When powering loads with significant dynamic current requirements, the voltage regulation at the point of load can be improved by addition of decoupling capacitors at the load. The most effective technique is to locate low ESR ceramic and electrolytic capacitors as close to the load as possible, using several parallel capacitors to lower the effective ESR. The ceramic capacitors will handle high-frequency dynamic load changes while the electrolytic capacitors are used to handle low frequency dynamic load changes. Ceramic capacitors will also reduce any high frequency noise at the load.

It is equally important to use low resistance and low inductance PCB layouts and cabling.


External decoupling capacitors will become part of the control loop of the DC/DC converter and may affect the stability margins. As a “rule of thumb”, 100 µF/A of output current can be added without any additional analysis. The ESR of the capacitors is a very important parameter. Power Modules guarantee stable operation with a verified ESR value of >10 mΩ across the output connections.

For further information please contact your local Ericsson Power Modules representative.

Output Voltage Adjust (V_{adj})

All PKM 4000D Series DC/DC converters have an Output Voltage adjust pin (V_{adj}). This pin can be used to adjust the output voltage above or below Output voltage initial setting. When increasing the output voltage, the voltage at the output pins (including any remote sense offset) must be kept below the maximum output adjust range. Also note that at increased output voltages the maximum power rating of the converter remains the same, and the output current capability will decrease correspondingly.

To decrease the output voltage the resistor should be connected between V_{adj} pin and -Sense pin. To increase the voltage the resistor should be connected between V_{adj} pin and +Sense pin. The resistor value of the Output voltage adjust function is according to information given under the output section.

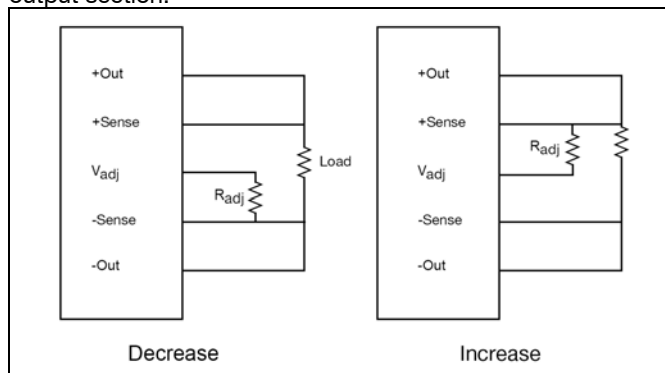

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W

EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

Operating information continued

Parallel Operation

The PKM 4000DSeries DC/DC converters can be paralleled for redundancy if external o-ring diodes are used in series with the outputs. It is not recommended to parallel the PKM 4000D Series DC/DC converters for increased power without using external current sharing circuits.

See Design Note 006 for detailed information.

Remote Sense

All PKM 4000DSeries DC/DC converters have remote sense that can be used to compensate for moderate amounts of resistance in the distribution system and allow for voltage regulation at the load or other selected point. The remote sense lines will carry very little current and do not need a large cross sectional area. However, the sense lines on the Pcb should be located close to a ground trace or ground plane. In a discrete wiring situation, the use of twisted pair wires or other technique to reduce noise susceptibility is highly recommended. The remote sense circuitry will compensate for up to 10% voltage drop between the sense voltage and the voltage at the output pins. The output voltage and the remote sense voltage offset must be less than the minimum over voltage trip point. If the remote sense is not needed the -Sense should be connected to -Out and +Sense should be connected to +Out.

Over Temperature Protection (OTP)

The PKM 4000DSeries DC/DC converters are protected from thermal overload by an internal over temperature shutdown circuit. When the Pcb temperature (TC reference point) exceeds the temperature trig point (120 °C) for the OTP circuit the converter will cut down output power. The converter will go into hiccup mode until safe operational temperature is restored.

Over Voltage Protection (OVP)

The PKM 4000DSeries DC/DC converters include output overvoltage protection. In the event of an overvoltage condition due to malfunction in the voltage monitoring circuits, the converter's PWM will automatically dictate minimum duty-cycle thus reducing the output voltage to a minimum.

Over Current Protection (OCP)

The PKM 4000DSeries DC/DC converters include current limiting circuitry that allows them to withstand continuous overloads or short circuit conditions on the output. The output voltage will decrease towards zero for output currents in excess of max output current (Iomax).

The converter will resume normal operation after removal of the overload. The load distribution system should be designed to carry the maximum output short circuit current specified.

Thermal Consideration


General

The PKM 4000DSeries DC/DC converters are designed to operate in a variety of thermal environments, however sufficient cooling should be provided to help ensure reliable operation. Heat is removed by conduction, convection and radiation to the surrounding environment. Increased airflow enhances the heat transfer via convection. The available load current vs. ambient air temperature and airflow at $V_{in} = 53$ V for each model is according to the information given under the output section. The test is done in a wind tunnel with a cross section of 305 x 305 mm, the DC/DC converter vertically mounted on a 16 layer Pcb with a size of 254 x 254 mm, each layer with 35 μ m (1 oz) copper. Proper cooling can be verified by measuring the temperature of selected devices. Peak temperature can occur at positions P1 - P4. The temperature at these positions should not exceed the recommended max values.

Note that the max value is the absolute maximum rating (non destruction) and that the electrical Output data is guaranteed up to $T_{ref} + 90^{\circ}\text{C}$.

See Design Note 019 for further information.

Position	Device	Designation	max value
P ₁	Pcb	T _{ref}	110° C
P ₂	Mosfet	T _{surface}	120° C
P ₃	Mosfet	T _{surface}	120° C
P ₄	Transformer	T _{surface}	130° C

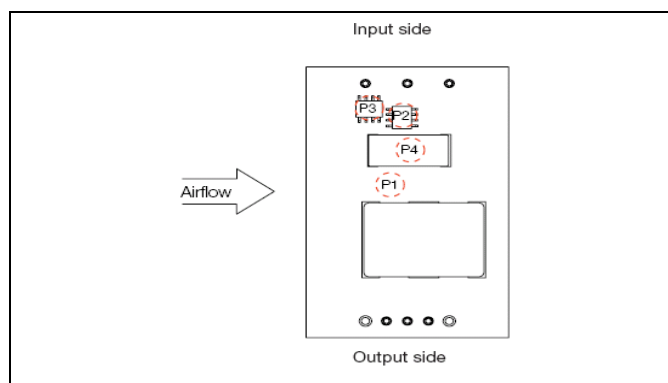

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W

EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

Thermal Consideration continued

Definition of reference temperature (T_{ref})

The reference temperature is used to monitor the temperature limits of the product. Temperatures above maximum T_{ref} are not allowed and may cause degradation or permanent damage to the product. T_{ref} is also used to define the temperature range for normal operating conditions. T_{ref} is defined by the design and used to guarantee safety margins, proper operation and high reliability of the module.

Ambient Temperature Calculation

By using the thermal resistance the maximum allowed ambient temperature can be calculated.

1. The power loss is calculated by using the formula $((1/\eta) - 1) \times \text{output power} = \text{power losses (Pd)}$.
 η = efficiency of converter. E.g 90 % = 0.90
2. Find the thermal resistance (R_{th}) in the Thermal Resistance graph found in the Output section for each model.
Calculate the temperature increase (ΔT).
 $\Delta T = R_{th} \times P_d$
3. Max allowed ambient temperature is:
 $\text{Max } T_{ref} - \Delta T$.

E.g PKM 4110D PINB 53v full load at 2m/s:


$$1. ((\frac{1}{0.89}) - 1) \times 115 \text{ W} = 14.2 \text{ W}$$

$$2. 14.2 \text{ W} \times 4^\circ\text{C/W} = 56^\circ\text{C}$$

$$3. 110^\circ\text{C} - 56^\circ\text{C} = \text{max ambient temperature is } 54^\circ\text{C}$$

The real temperature will be dependent on several factors, like Pcb size and type, direction of airflow, air turbulence etc.
It is recommended to verify the temperature by testing.

Connections

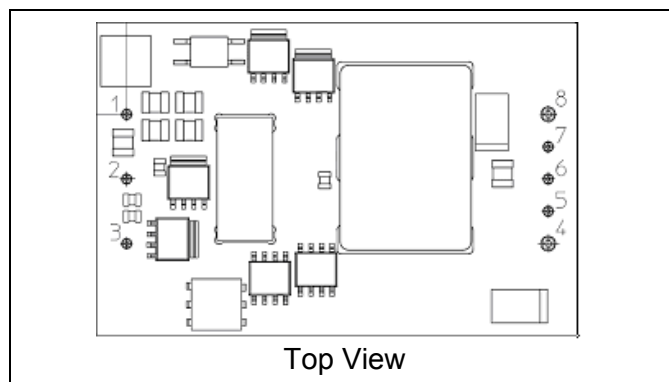

Pin	Designation	Function
1	+In	Positive input
2	RC	Remote control
3	- In	Negative input
4	- Out	Negative output
5	- Sen	Negative remote sense
6	Vadj	Output voltage adjust
7	+ Sen	Positive remote sense
8	+ Out	Positive output

PKM 4000D PINB Series DC/DC converters, Input 36-75 V, Output 40 A/132 W	EN/LZT 146 306 R4A July 2008
	© Ericsson Power Modules AB

Mechanical Information






Table 1


Height option	Height max.	Stand-off min.
Standard	9.35 [0.368]	0.07 [0.003]
M	10.53 [0.415]	1.25 [0.049]

Table 2

Pin option	Lead Length
Standard	5.33 [0.210]
LA	3.69 [0.145]
LB	4.57 [0.180]

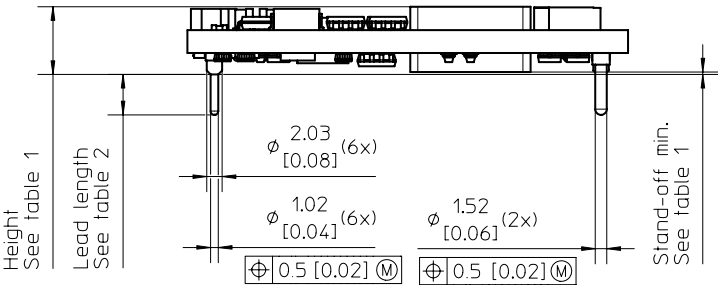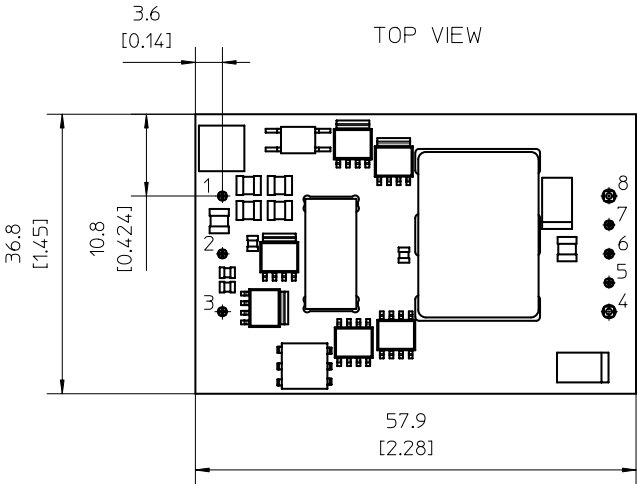

Recommended footprint - TOP VIEW

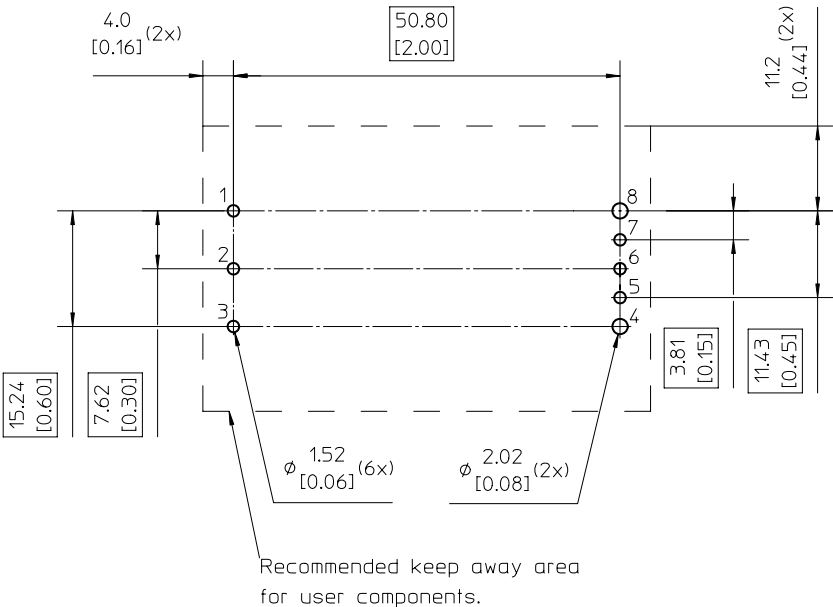

Weight: Typical 40g

Pins:
Material, pins 1-3, 5-7: Brass
Material, pins 4, 8: Copper alloy
Plating: 0,1 μm Gold over 2 μm Nickel

All dimensions are in mm [inches]
Tolerances unless specified
x.x ± 0.5 [0.02]
x.xx ± 0.25 [0.01]
Not applied on the recommended footprint

PKM 4000D PINB Series
DC/DC converters, Input 36-75 V, Output 40 A/132 W

EN/LZT 146 306 R4A July 2008

© Ericsson Power Modules AB

Mechanical Information for base plate option


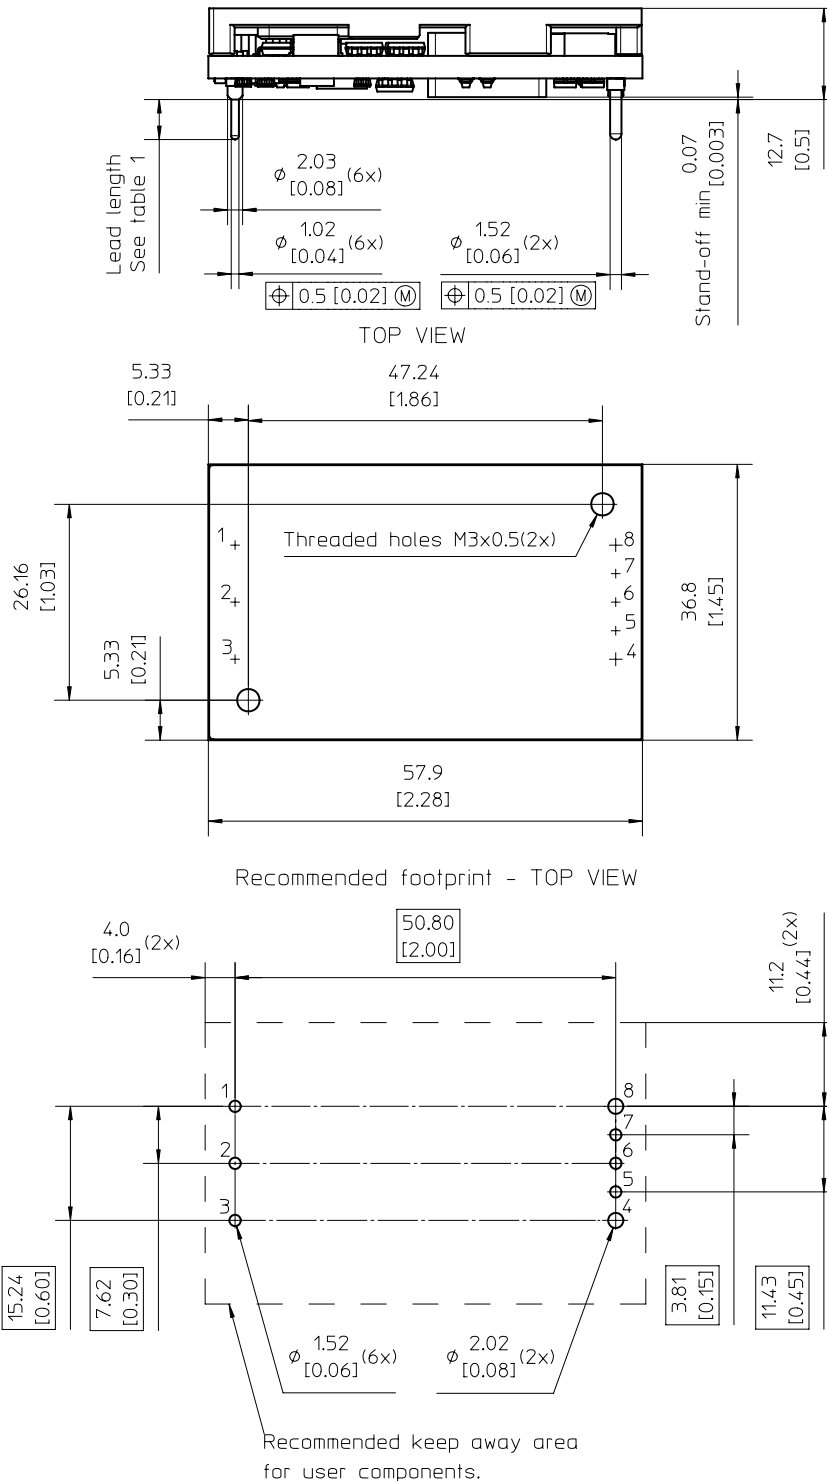


Table 1

Pin option	Lead Length
Standard	5.33 [0.210]
LA	3.69 [0.145]
LB	4.57 [0.180]

Weight: Typical 65g

Pins:

Material, pins 1-3, 5-7: Brass

Material, pins 4-8: Copper alloy

Plating: 0,1 μ m Gold over 2 μ m Nickel

All dimensions are in mm [inches]

Tolerances unless specified

x.x $\pm$ 0.5 [0.02]

x.xx $\pm$ 0.25 [0.01]

Not applied on the recommended footprint



PKM 4000D PINB Series DC/DC converters, Input 36-75 V, Output 40 A/132 W	EN/LZT 146 306 R4A July 2008
	© Ericsson Power Modules AB

Soldering Information – Through Hole Mounting

The product is intended for through hole mounting in a PCB.
When wave soldering is used, the temperature on the pins is specified to maximum 260 °C for maximum 10 seconds.


Maximum preheat rate of 4 °C/s and temperature of max 150 °C is suggested. When hands soldering care should be taken to avoid direct contact between the hot soldering iron tip and the pins for more than a few seconds in order to prevent overheating.

A no-clean (NC) flux is recommended to avoid entrapment of cleaning fluids in cavities inside of the DC/DC power module. The residues may affect long time reliability and isolation voltage.

Delivery package information

The products are delivered in antistatic trays.

Tray specifications	
Material	PS, dissipative
Surface resistance	10E5 to 10E12 ohms/square
Tray capacity	20 converters/tray
Tray weight	140 g empty, 940 g full
Box capacity	20 converters

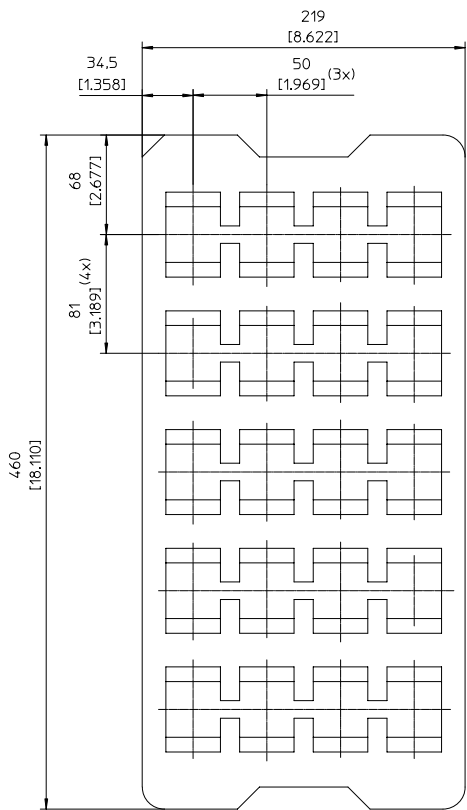

PKM 4000D PINB Series DC/DC converters, Input 36-75 V, Output 40 A/132 W	EN/LZT 146 306 R4A July 2008
	© Ericsson Power Modules AB

Product Qualification Specification

Characteristics			
External visual inspection	IPC-A-610		
Change of temperature (Temperature cycling)	IEC 60068-2-14 Na	Temperature range Number of cycles Dwell/transfer time	-40 to +100 °C 300 30 min/0-1 min
Cold (in operation)	IEC 60068-2-2 Bc	Temperature T _A Duration	-40 °C 2 h
Damp heat	IEC 60068-2-3 Ca	Temperature Humidity Duration	+85 °C 85 % RH 1000 hours
Immersion in cleaning solvents	IEC 60068-2-45 XA	Water Isopropanol Glycol ether (Zestron)	+55 ±5 °C +35 ±5 °C +35 ±5 °C
Mechanical shock	IEC 60068-2-27 Ea	Peak acceleration Duration Pulse shape Directions Number of pulses	200 g 3 ms Half sine 6 18 (3 + 3 in each perpendicular direction)
Vibration random	IEC 60068-2-34 Eb	Frequency Spectral density Duration	10 to 500 Hz 0.025 g ² /Hz 10 min in each 3 perpendicular directions
Vibration sinusoidal	IEC 60068-2-6 Fc	Frequency Acceleration Duration	10 to 500 Hz 10 g 2 h in each 3 perpendicular directions
Robustness of terminations	IEC 60068-2-21 Ua ₁	Tensile Duration	20N/signal pin; 40N/power pin 10 s
Solder heat stability	IEC 60068-2-20 Tb Method 1A	Temperature, solder Duration	260 °C 10 s
Storage test	IEC 60068-2-2 Ba	Temperature Duration	125 °C 1000 h