
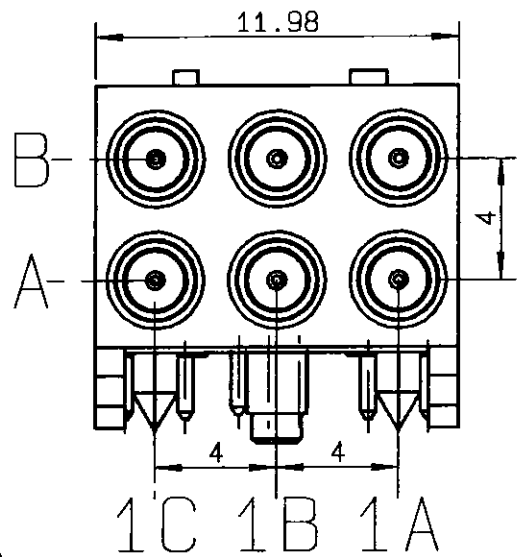


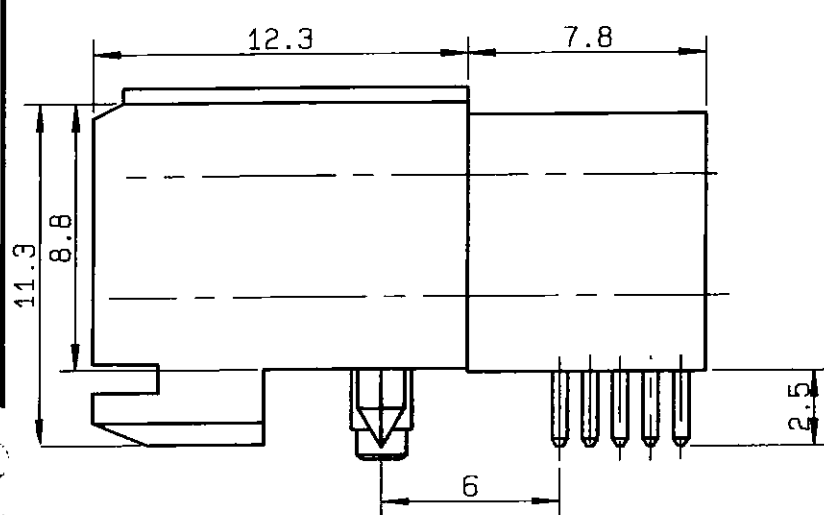

CONNECTOR: 6 COAX POSITION AB/1A,1B,1C

CHARACTERISTICS

NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-6	GHz
TEMPERATURE RATING	-25/+125	°C
VSWR	1.12(0-3GHz)	Maxi
RF INSERTION LOSS	0.2 $\sqrt{f(\text{GHz})}$	dB Maxi
VOLTAGE RATING	500	Vrms Max
DIELECTRIC WITHSTANDING VOLTAGE	750	Vrms min
INSULATION RESISTANCE	5000	MΩ min
HERMETIC SEAL	-	cc/s
	NA	Atm.cm3/s
LEAKAGE (pressurized only)	-	psi
	NA	MPa
WEIGHT	0	Oz
	7.54	g

STANDARDISATION

CABLE RETENTION

CENTER CONTACT RETENTION

Axial force - mating end 1.35₆ lb min N

Axial force - opposite end 1.35₆ lb min N

Torque (Min) 0 NA Inch.oz cm.N

RECOMMENDED TORQUES

Mating 0 NA Inch.lb cm.N

Panel nut 0 NA Inch.lb cm.N

Clamp nut 0 NA Inch.lb cm.N

CONSTRUCTION

CONNECTOR PARTS

MATERIALS

FINISH

BODY	BRASS
OUTER CONTACT	-
CENTER CONTACT	BERYLLIUM COPPER
INSULATOR	PTFE
HOUSING	LIQUID CRYSTAL POLYMER
-	-
-	-
-	-
-	-
-	-

GOLD OVER NICKEL + NICKEL

-

GOLD OVER NICKEL

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

ISSUE	REVISION No	DESCRIPTION	BY	DATE
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

Initiated on 28/02/95

Approval by -

The information given here is subject to change without notice. Design changes may be in order to improve the product.

FEMALE COAXIPACK 6 WAYS
WITH COAX SOLDER TYPE


Issue : 9515

Series :
MCC2

Page
2 / 2

102
103
104
105
106
107

RECOMMENDED P.C BOARD LAYOUT (COMPONENT SIDE)

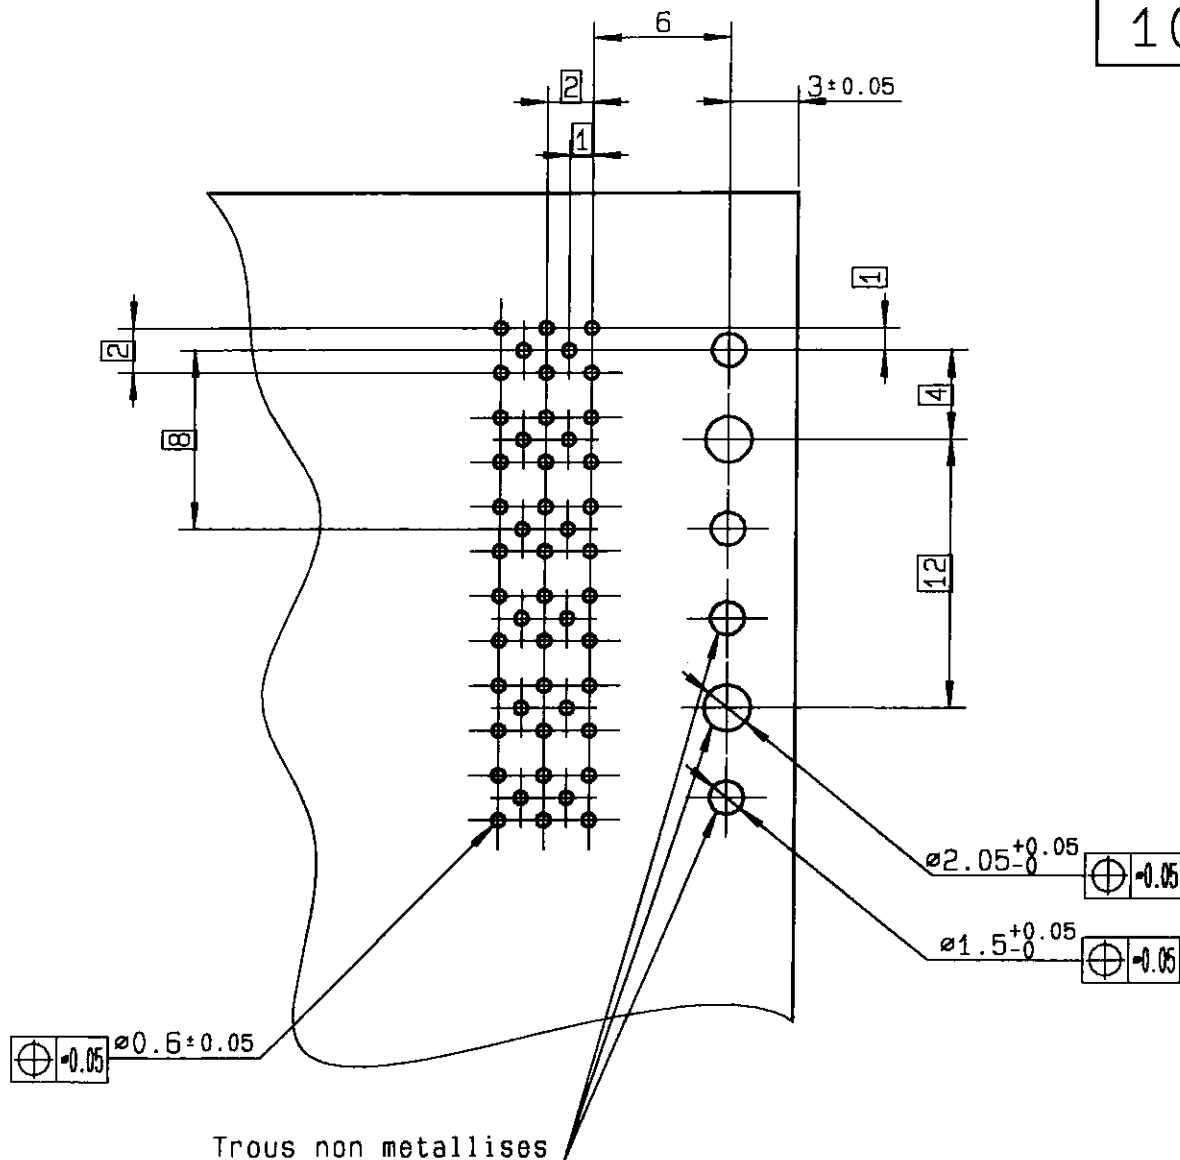

ISSUE	REVISION No	DESCRIPTION	BY	DATE
.	.	.	.	.
.	.	.	.	.
.	.	.	.	.

Initiated on 10-04-95

Approval by FANJAT

The information given here
is subject to change without
notice. Design changes may be
in order to improve the product.