

HIGH VOLTAGE DC SWITCHING RELAY 1 POLE - 20 / 30A

FTR-E1 Series

FEATURES

- 20/30A - 450VDC and 20A - 800VDC high voltage DC load switching.
- Non polarized contacts. Switchable for charge/discharge circuit.
- Low coil power consumption (0.9W at coil rated voltage)
- High insulation.
 - Between coil and contact: 5,000VAC, 1 minute.
 - Between open contact: 2,500VDC, 1 minute.
- cULus recognized types are available.
- Plastic material: UL flammability 94V-0.
- Plastic sealed.



Applications

- On board electrical vehicles charger system and plug-in hybrid vehicles
- String disconnecting of photovoltaics systems
- Charge and discharge of power storage system
- High voltage DC load control system
- Electric vehicles precharge
- Vehicle to Home

Part Numbers

[Example] FTR-E1 A A 012 Y - MF
 (a) (b) (c) (d) (e) (f)

(a)	Relay type	FTR-E1 : FTR-E1 series
(b)	Contact configuration	A : 1a (1 form X)
(c)	Power consumption	A : Standard (900mW)
(d)	Coil voltage	012 : 12VDC 024 : 24VDC
(e)	Contact material	Y : Silver alloy
(f)	Special type	MF : Standard (20A) GR : cULus recognized HA (20A) : cULus recognized (30A)

Note: The designation name is stamped on the top of the relay case as follows:

Example: Ordering part number: FTR-E1AA012Y-MF Stamped on part number: E1AA012Y-MF

FTR-E1 Series

■ Specifications

Item			FTR-E1		Remarks / conditions
			20A type (-MF, -GR)	30A type (-HA)	
Contact data	Configuration		1a (1 form X)		
	Material		Silver alloy		
	Construction		Single contact		
	Contact rating		20A, 450VDC 20A, 800VDC	30A, 450VDC 20A, 800VDC	Resistive
	Voltage drop		Max. 0.5V at 20A		Initial
	Continuous carrying current		25A (85°C, cable size 5.5mm ²) 30A (70°C, cable size 8mm ²) 40A (40°C, cable size 8mm ²)		Please refer to characteristic data
	Max. carrying current		40A / 1 hour (85°C, cable size 8mm ²)		
	Min. switching load		1A 6VDC		Reference *1
Coil	Rated power consumption		900mW		At 20°C
	Operate power consumption		324mW		At 20°C
	Operating temperature range		-40°C ~ +85°C		No frost
Time	Operate		Max. 30ms (without bounce)		At 20°C, nominal voltage
	Release		Max. 10ms (without diode, without bounce)		
Life	Mechanical		1 x 10 ⁶ operations		18.000 operations / hour
	Electrical		75 x 10 ³ operations		10A, 450VDC resistive, with varistor *2
			10 x 10 ³ operations		20A, 450VDC resistive, with varistor *2
			-	5 x 10 ³ operations	30A, 450VDC resistive, with varistor *2
			10 operations		20A, 800VDC resistive
			100 x 10 ³ operations		20A, 450VDC inrush only (without break)
			100 x 10 ³ operations		20A, 800VDC inrush only (without break)
Insulation	Insulation resistance		1000MΩ		At 1000VDC
	Dielectric withstanding voltage	Open contact	2,500VAC(50/60Hz), 1 minute		
		Coil contact	5,000VAC(50/60Hz), 1 minute		
Other	Vibration resistance	Misoperation	5~200Hz, 45m/s ² , constant acceleration		Sense time 1ms, contact ON/OFF
		Endurance	5~200Hz, 45m/s ² , constant acceleration		Contact ON/OFF, up/down 4hours, left/right/front/back each 2 hours
	Shock resistance	Misoperation	300m/s ² (11±1ms, contact ON) 200m/s ² (11±1ms, contact OFF)		Sense time 1ms
		Endurance	1,000m/s ² (6±1ms)		Contact ON/OFF total 36 times
Dimensions / weight		43.6×28.3×36.8 mm / approx. 75g			

Note: Electrical characteristics mentioned above are the values at JIS standard condition (temperature 15 to 35degC, relative humidity 25 to 75%, atmospheric pressure 86k to 106kPa) unless otherwise specified.

Note: Care shall be taken on the heat generated on PC board when maximum carrying current exceeds 10A. Please perform the confirmation test with actual conditions.

*1: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

*2: Electrical life at resistive load mentioned above are the values when a varistor is used as coil suppression device. Using protection device other than varistor, the contact life expectancy may decrease drastically.

FTR-E1 Series

■ Coil Data

Coil code	Rated Coil Voltage (VDC)	Coil Resistance +/-10%(Ω)	Must Operate Voltage* (VDC)	Must Release Voltage* (VDC)
012	12	160	7.2 (20°C) 9.0 (85°C)	1.0 (20°C) 1.3 (85°C)
024	24	640	14.4 (20°C) 18.0 (85°C)	2.0 (20°C) 2.6 (85°C)

Note: All values in the table are valid at 20degC and zero contact current unless otherwise specified.

Note: Coil polarity must be applied as specified in schematics.


*: Specified operated values are valid for pulse wave voltage.

■ Safety Standards

Type	Compliance	Contact Rating
cULus	UL508 C22.2 No.14-13 (File No. E63615)	[FTR-E1AA Y-GR] 10A, 450VDC (resistive) 85°C 20A, 450VDC (resistive) 85°C [FTR-E1AA Y-HA] 10A, 450VDC (resistive) 85°C 20A, 450VDC (resistive) 85°C 30A, 450VDC (resistive) 85°C

■ Dimensions


- Dimensions

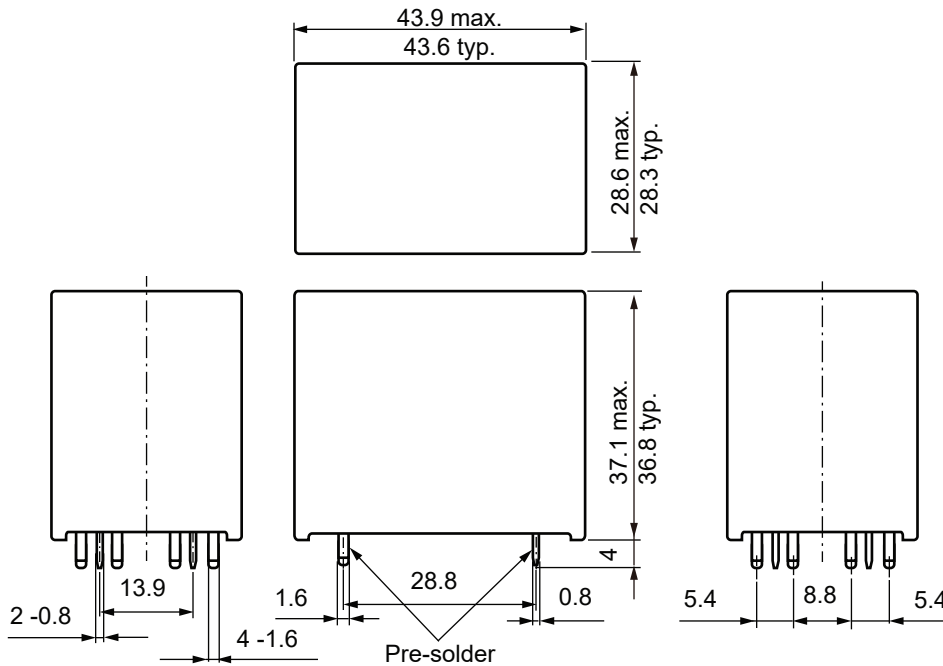


Note: Dimensions of the terminals do not include thickness of pre-solder.

FTR-E1 Series

- Schematics
(BOTTOM VIEW)




- PC Board Mounting Hole Layout (BOTTOM VIEW)

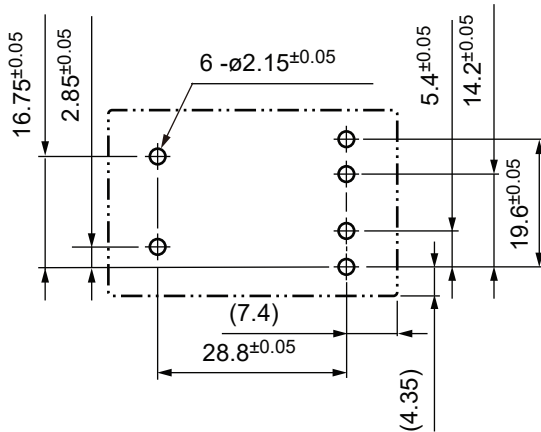


(): Reference value
Unit: mm

Characteristic Data (Reference)


Distribution of operate/release voltage

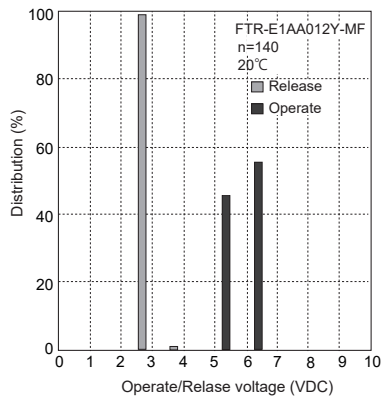




Distribution of voltage drop

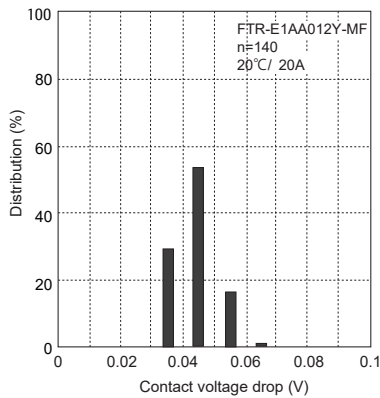


Distribution of operate time

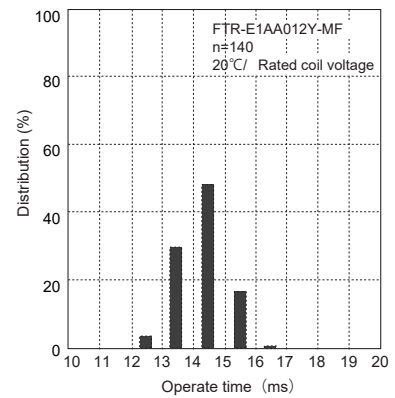


FTR-E1 Series

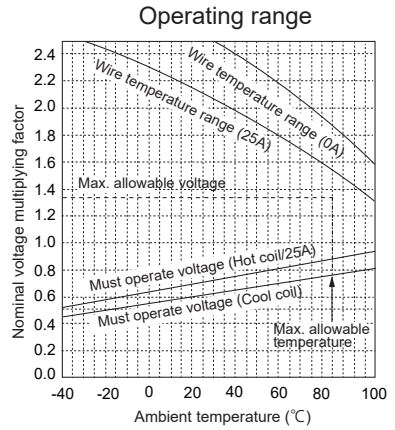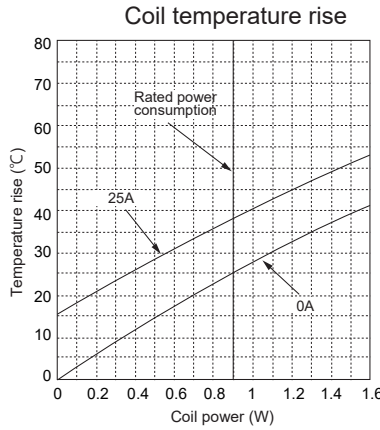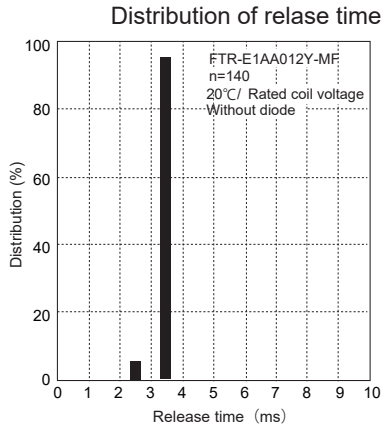


Ambient temperature - contact carrying current

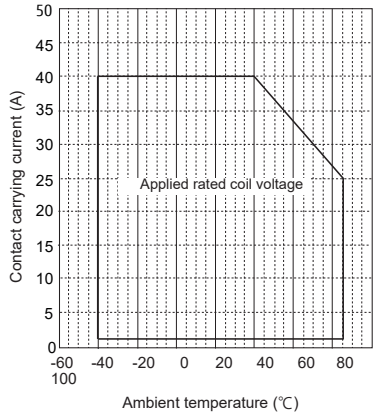


Switching life curve (600VDC, resistive load)

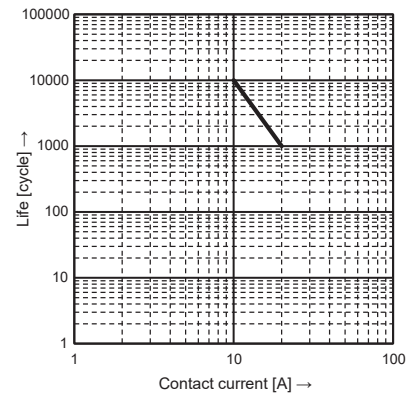


Vibration resistance characteristics

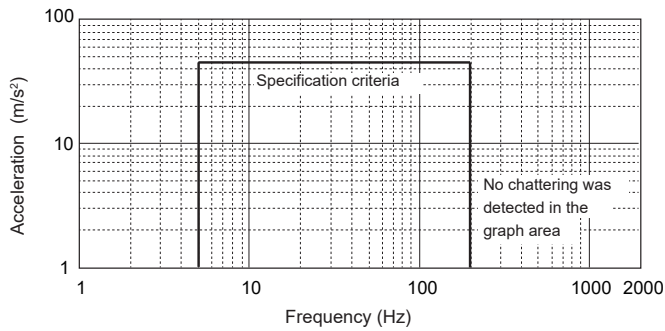

Test material: coil energized and de-energized
Direction of vibration: see diagram below
Detection level: chatter > 1 ms



Shock resistance characteristics

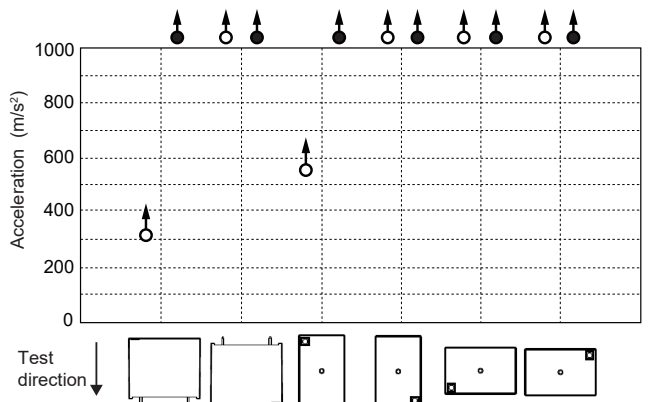

Test material: coil energized and de-energized
Shock duration: 11ms (490m/s² or less)
6ms (more than 490m/s²)
Test direction: see diagram under the graph
Detection level: chatter > 1ms

- : Coil de-energized
- : Coil energized

FTR-E1 Series

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.
- Please connect relay coils according to specified polarity.

Cautions for high voltage DC switching relays

- There is a possibility that the relay is not able to switch off the load at high voltage DC load. Fail safe circuit must be provided to prevent injury, fire or other harms resulting from failure occurred on relays.
- Relays are periodic maintenance parts. Do not exceed the specified life time and/or switching conditions.

GENERAL INFORMATION

1. ROHS Compliance

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: maximum 120°C
within 90 sec.
Soldering: dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:

Soldering Iron: 30-60W
Temperature: maximum 340-360°C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

FTR-E1 Series

Contact

Japan

FUJITSU COMPONENT LIMITED
Shinagawa Seaside Park Tower
12-4, Higashi-shinagawa 4-chome,
Tokyo 140 0002, Japan
Tel: (81-3) 3450-1682
Email: fcl-contact@cs.fcl-components.com

North and South America

FUJITSU COMPONENTS AMERICA
350 Cobalt Way, M/S 160
Sunnyvale, CA 94085 U.S.A.
Tel: (1-408) 745-4900
Email: components@gr.fcl-components.com

Europe

FUJITSU COMPONENTS EUROPE
Diamantlaan 25
2132 WV Hoofddorp, Netherlands
Tel: (31-23) 5560910
Email: info.fceu@cs.fcl-components.com

Asia Pacific

FUJITSU COMPONENTS ASIA.
No. 20 Harbour Drive, #07-01B
Singapore 117612
Tel: (65) 6375-8560
Email: fcal@fcl-components.com

China

FUJITSU ELECTRONIC COMPONENTS
(SHANGHAI)
Unit 4306, InterContinental Center
100 Yu Tong Road, Shanghai 200070, China
Tel: (86 21) 3253 0998
Email: fcsh@fcl-components.com

Hong Kong

FUJITSU COMPONENTS HONG KONG
Room 13, 23/F, Seapower Tower, Concordia
Plaza, No.1 Science Museum Road, Tsim
Sha Tsui East, Kowloon, Hong Kong
Tel: (852) 2881 8495
Email: fcal@fcl-components.com

Korea

FUJITSU COMPONENTS KOREA
Alpha Tower #403, 645 Sampyeong-dong,
Bundang-gu, Seongnam-si, Gyeonggi-do, 13524 Korea
Tel: (82 31) 708-7108
Email: fcal@fcl-components.com

Web: www.fcl.fujitsu.com/en/

© 2022 Fujitsu Component Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. Fujitsu Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death. Please do not use Fujitsu Products without securing the sufficient safety and reliability required for the High Safety Required Applications.

In addition, Fujitsu shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of Fujitsu Products in the High Safety Required Applications.

Fujitsu warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Component Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Component Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. April 14, 2022.