

RED INDICATES ORIGINAL


DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS, INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR REPRODUCTION OF MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVIEWS			3-0230		SH 1
REV	EO	DESCRIPTION	OWN	APPROVED	DATE
K	12391	ADDED -224, & -225; CHANGED DIA .750 TO .765 ±.005; SEE ECO	DBN	W.M. Fd	4/1/98

DASH NO	CABLES ACCOMMODATED	A DIM	B HEX	ASSEMBLE PER
-201	M17/178-00002	1.164	.255	TAI-143
-202	TWC-78-1			
-203	TWC-124-1A			
-204	10802, RAYCHEM			
-205	TWAC-78-1F2			
-206	782800130, RAYCHEM	1.289	.344	TAI-144
-207	93310 BELDEN			
-208	202-3927 MICRODOT			
-209	202-3942 MICRODOT			
-210	9451 BELDEN			
-211	202-3934 MICRODOT	1.164	.255	TAI-143
-212	2524E0114, RAYCHEM			
-213	TWC-78-2			
-214	TWC-124-2			
-215	BL-882 TIMES			
-216	BL-1242 TIMES	1.289	.344	TAI-144
-217	GC875TM24H, GRUMMAN			
-218	EPD 22188B, RAYCHEM			
-219	252801114, RAYCHEM			
-220	GC875RR1, GRUMMAN			
-221	10614, RAYCHEM	1.164	.255	TAI-143
-222	10613, RAYCHEM			
-223	HMS2-1149, HUGHES			
-224	TWCP-124-3			
-225	PS885PL, PRIME STOCK			

DASH NO	CABLES ACCOMMODATED	A DIM	B HEX	ASSEMBLE PER
-301	GC875GC1, GRUMMAN	1.164	.255	TAI-157
-302	GC875GB1, GRUMMAN 5022ES111, RAYCHEM			
-303	7528A5314, RAYCHEM			
-304				
-305	M17/177-00001/295-3804 MICRODOT			
-306	TRC-50-2 M17/134-00002	1.289	.344	TAI-173
-307	TRC-75-1			
-308	TRC-75-2			
-309	TRC-50-1			
-309	TRC-50-1			

INCH	MM
.005	0.13
.030	0.76
.116	2.95
.255	6.48
.257	6.53
.260	6.60
.344	8.74
.567	14.40
.572	14.53
.580	14.73
.688	17.48
.775	19.69
1.00	25.40
1.164	29.57
1.25	31.75
1.289	32.74
1.75	44.45

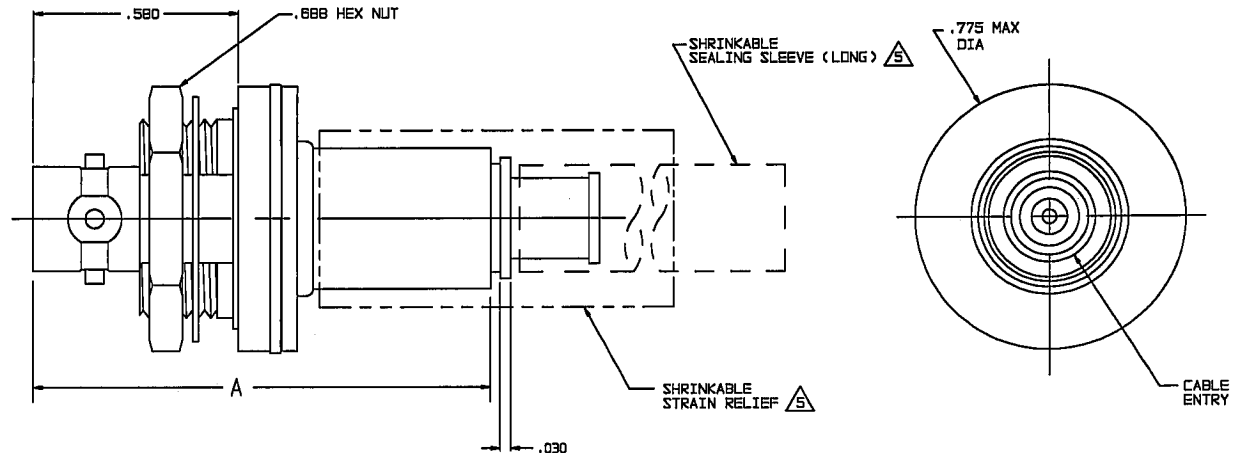

1 SHRINKABLE STRAIN RELIEF AND/OR SHRINKABLE SEALING SLEEVE SUPPLIED LOOSE AS FOLLOWS:

a. CABLE GROUPS -207, -210 & -307:

1 SHRINKABLE STRAIN RELIEF (1.00 LONG)
1 SHRINKABLE SEALING SLEEVE (1.25 LONG)

b. CABLE GROUPS -201 THROUGH -206, -208, -209, -217 THROUGH -223, -301, -302, -303 & -309

1 SHRINKABLE SEALING SLEEVE (1.25 LONG)

c. CABLE GROUPS -211 THROUGH -216, -305, -306 & -308

1 SHRINKABLE STRAIN RELIEF (1.75 LONG)

4. MAX PANEL THK .116

3. 4-LUG SUBMINIATURE CONCENTRIC TWINAX (4 PIECE ASSY) AND TRIAX (6 PIECE ASSY) FULL CRIMP INSULATED BULKHEAD MOUNT RECEPTACLE

2. FINISH: TFS-1A (NICKEL)


1. ALL DIMENSIONS ARE IN INCHES

7. EXAMPLE OF COMPLETE MODEL NO:
BJ154ACFL-201


BASIC MODEL NO. CABLE GROUP DASH NO

6. EXAMPLE OF COMPLETE PART NO:
3-0230-201

BASIC PART NO. CABLE GROUP DASH NO



RECOMMENDED
PANEL CUTOUT
SCALE: NONE



RECOMMENDED
HEX CRIMP
SCALE: NONE

QTY	DESCRIPTION	PART NUMBER	ITEM
TOL. UNLESS SPECIFIED: .XX ±.03 .XXX ±.005 .XXXX ±.0005 ANG. .001	TROMPETER ELECTRONICS, INC.	BJ154ACFL	
OWN DBN 3/21/98 CHK 1/4/98 3/31/98 ENGR APPR	MATERIAL CODE IDENT 14949	DRAWING NO. 3-0230	REV K
NEXT ASSY	SCALE 4/1	DATE 5-31-95	SHEET 1 OF 2