



The worldwide leader in thermal management solutions

News About Us Contact Us Global Manufacturing Shop Aavid

Products

Solutions

Industries

Search Aavid

Register or Sign Into Your Account

Cart

Knowledge Center

Design Help





- Interface Materials
 - Insulators
 - Aluminum Oxide Ceramic
 - Insulating Covers
 - Bushings
 - Mica
 - Thermasil
 - Beryllium Oxide Ceramic
 - Hard Anodized Aluminum

Mica insulators

Mica insulators provide high maximum operating temperatures (550°C) and excellent electrical properties.

Check Distributor Stock

Enter a part number for pricing and availability.

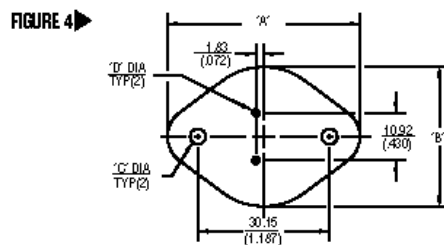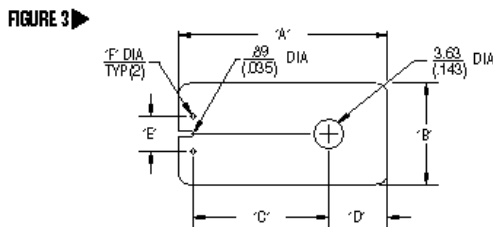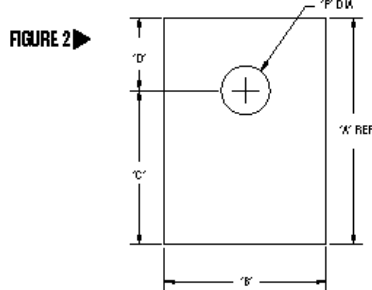

Note: Tolerances are ±.38mm (.015") unless otherwise specified.


Part No.	RoHS	PCN	Figure	Case Style	A	B	C	D	E	F	Thickness
56-02-95G	RoHS <input checked="" type="checkbox"/> Compliant	N/A	1	TO-218	23.24 (0.915)	18.80 (0.740)	16.26 (0.640)	6.98 (0.275)	N/A	5.59 (.220)	0.05/0.10 (0.002/0.004)
56-02-101G*	RoHS <input checked="" type="checkbox"/> Compliant	N/A	2	TO-218	26.16 (1.000)	22.61 (0.890)	17.91 (0.705)	8.26 (0.325)	N/A	11.30 (.144)	0.05/0.10 (0.002/0.004)
56-77-10G	RoHS <input checked="" type="checkbox"/> Compliant	N/A	3	TO-220	21.89 (0.862)	13.21 (0.520)	14.73 (0.580)	5.26 (0.270)	5.08 (0.200)	1.75 (0.070)	0.05/0.10 (0.002/0.004)
56-77-8G	RoHS <input checked="" type="checkbox"/> Compliant	Product Change Notice <input type="checkbox"/>	2	TO-220	18.93 (0.745)	13.84 (0.545)	13.54 (0.533)	5.38 (0.212)	N/A	3.81 (0.150)	0.05/0.10 (0.002/0.004)

Mica insulators - heat sink interface material

56-77-11G	RoHS	2	TO-220	18.93 (0.745)	13.84 (0.545)	13.54 (0.533)	5.38 (0.212)	N/A	3.05 (0.120)	0.05/0.10 (0.002/0.004)
56-03-2G	RoHS	4	TO-3	42.04 (1.655)	27.00 (1.063)	3.96 (0.156)	1.57 (0.062)	N/A	N/A	0.05/0.10 (0.002/0.004)
56-03-8G	RoHS	4	TO-3	42.85 (1.687)	30.15 (1.187)	3.96 (0.156)	1.57 (0.062)	N/A	N/A	0.05/0.10 (0.002/0.004)

* This insulator is also for TO-218, TO-247, and TO3P.
 Note: Tolerances are ±.38mm (.015") unless otherwise specified.

Property	Typical Value 25°C
Electrical	
Dielectric Strength 0.025mm to 0.076mm thick in air (1 to 3 mils thick in air)	172 x 103 volts/mm (4500 volts/mil)
Dielectric Constant	6.5 to 8.7
Dissipation Factor 106 Cycles	.0001 -.004
Volume Resistivity	1015 ohm-cm
Physical	
Modulus of Elasticity in Tension	172 x 103 (25 x 106 psi)
Tensile Strength	310 MPa (45,000 psi)
Hardness Mohs	3.0
Shore	115
Comprehensive Strength	2.21 x 108 Pa (32,000 psi)
Specific Gravity	2.9
Thermal	
Thermal Conductivity:	0.528 Wm-1°C-1 (0.30 Btu/hr.ft °F)
Coefficient of Thermal Expansion	3.24 x 10-5/°C (1.8x 10-5/°F)
Specific Heat	.084 KJ/Kg°C (.02 Btu/Lb °F)
Melting Point	1275°C
Maximum Operating Temperature (1022°C)	550°C
Chemical Composition	
Silica	45.4%
Alumina	37.5%
Potash	12.0%
Water	5.0%



Part Number	ID	OD	Diameter Tolerances	Thickness
56-02-10G	5.16 (0.203)	14.30 (0.563)	±13 (0.005)	0.05/0.10 (0.002/0.004)
56-02-72G	6.55 (0.258)	25.40 (1.00)	±38 (0.015)	0.10/0.15 (0.004/0.006)

Customer Assistance

- Contact Us
- Get Design Assistance
- Find a Distributor
- Find a Sales Rep
- Request a Quote
- Placing an Order
- Terms and Conditions
- Returns

Popular Products

- Fans
- Extrusions
- Board Level
- Liquid Cooling
- Heat Pipe Technology
- Heat Sink Accessories
- Interface Materials

Our Company

- News and Events
- Management Team
- Worldwide Locations
- Directions to Headquarters
- Disclaimer
- Customer Survey
- Privacy Policy

Connect with Aavid

Sign up for Aavid News & Alerts

Like / Follow / Connect



© Copyright 2015 Aavid Thermalloy, LLC.