

LCD Module Technical Specification

First Edition
Apr 18, 2005

Final Revision
Apr 13, 2012

Type No. **F-51854GNFJ-SLW-ABN**

Customer : **STANDARD**

Customer's Product No : -----

KYOCERA Display Corporation

Approved: *Teruo Kuragane*
QUALITY ASSURANCE DIVISION

Checked: *Masayuki Kato*
Design Div.

Prepared: *Hisashi Okano*
Design Div.

Table of Contents

| | |
|--|----|
| 1. General Specifications..... | 3 |
| 2. Electrical Specifications..... | 4 |
| 3. Optical Specifications(MLA Driving)..... | 9 |
| 4. I/O Terminal..... | 11 |
| 5. Test | 13 |
| 6. Appearance Standards..... | 14 |
| 7. Code System of Production Lot | 17 |
| 8. Type Number..... | 17 |
| 9. Applying Precautions..... | 17 |
| 10. Precautions Relating Product Handling..... | 18 |
| 11. Warranty..... | 20 |

Revision History

| Rev. | Date | Page | Comment |
|---------------------------|---------------|-------|---|
| 1 | May 9, 2008 | 18~20 | Revise of Precautions Relating Product Handling and Warranty. |
| 2 | Apr. 13. 2012 | - | Changing company's name |
| F-51854GNFJ-SLW-ABN Rev.2 | | | KYOCERA Display Corporation |
| | | | Page 2/20 |

1. General Specifications

| | |
|--------------------|--|
| Operating Temp. | : min. -20°C ~max. 70°C |
| Storage Temp. | : min. -20°C ~max. 70°C |
| Dot Pixels | : 160 (W) × 128 (H) dots |
| Dot Size | : 0.54 (W) × 0.54 (H) mm |
| Dot Pitch | : 0.58 (W) × 0.58 (H) mm |
| Viewing Area | : 108.6 (W) × 82.55 (H) mm |
| Outline Dimensions | : 129.0 (W) × 102.0* (H) × 13.5max. (D) mm * Without FPC |
| Weight | : 160g max. |
| LCD Type | : NSD-22808 (F-STN / Black&White-mode / Transflective) |
| Viewing Angle | : 6:00 |
| Data Transfer | : 8-bit parallel data transfer |
| Backlight | : LED Backlight / White |
| Additional Spec. | : Winter White Display (Highly Reflective Type Transflective Display) |
| Drawing | : Dimensional Outline UE-211023A |
| RoHS regulation | : To our best knowledge, this product satisfies material requirement of RoHS regulation. Our company is doing the best efforts to obtain the equivalent certificate from our suppliers. |

2. Electrical Specifications

2.1. Absolute Maximum Ratings

V_{SS}=0V

| Parameter | Symbol | Conditions | Min. | Max. | Units |
|----------------------------|--|------------|------|----------------------|-------|
| Supply Voltage (Logic) | V _{DD} -V _{SS} | - | -0.3 | 6.0 | V |
| Supply Voltage (LCD Drive) | V ₃ , V _{OUT} | - | -0.3 | +18.0 | V |
| Supply Voltage (LCD Drive) | V ₁ , V ₂ , V _C , MV ₁ , MV ₂ | - | -0.3 | V ₃ | V |
| Input Voltage | V _{IN} | - | -0.3 | V _{DD} +0.3 | V |
| Output Voltage | V _{OUT} | - | -0.3 | V _{DD} +0.3 | V |

*1: Voltages V₃, V₂, V₁, V_C, MV₁, MV₂ and MV₃(V_{SS}) must always meet the conditions of V₃≥V₂≥V₁≥V_C≥MV₁≥MV₂≥MV₃(V_{SS}).

*2: Voltage V_{OUT} must always meet the conditions of V_{OUT}≥V_{DD2}≥V_{DD}.

When inputting V_{OUT} from outside, maintain the condition of V_{OUT}≥3+0.2V.

2.2. DC Characteristics

T_a=25°C, V_{SS}=0V

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Units |
|-------------------------------------|------------------------------------|---|-------------------------|--------|---------------------|-------|
| Supply Voltage (Logic) | V _{DD} -V _{SS} | - | 4.5 | - | 5.5 | V |
| Supply Voltage (LCD Drive) | V _{OUT} V ₃ | - | V _{DD2} 5.6 | - - | 16.2 16.2 | V |
| Supply Voltage (Booster Circuit) | V _{DD2} | With Triple(Based on V _{DD}) | 4.5 | - | 5.3 | V |
| Booster Output Voltage | V _{OUT} | - | - | - | 16.2 | V |
| Voltage Regulator Operating Voltage | V ₃ | *1 | 5.6 | - | 16.2 | V |
| "High" Level Input Voltage | V _{IH} | V _{DD} =4.5~5.5V *2 | 0.8×V _{DD} | - | V _{DD} | V |
| "Low" Level Input Voltage | V _{IL} | V _{DD} =4.5~5.5V *2 | V _{SS} | - | 0.2×V _{DD} | V |
| "High" Level Output Voltage | V _{OH} | V _{DD} =4.5~5.5V I _{OH} =-25μA *3 | 0.8×V _{DD} | - | V _{DD} | V |
| "Low" Level Output Voltage | V _{OL} | V _{DD} =4.5~5.5V I _{OL} =25μA *3 | V _{SS} | - | 0.2×V _{DD} | V |
| Supply Current | I _{DD} | V _{DD} -V _{SS} =5.0V | - | 1.2 | 1.8 | mA |
| Oscillation Frequency | f _{CL} | | 92 | 100 | 108 | kHz |

*1: The V₃ voltage adjusting circuit is adjusted within the electronic volume operating range.

These ranges are applied when using the external power supply.

*2: A0, D0~D7, RD, WR CS1, CS2, RES pins

*3: D0~D7

2.3.AC Characteristics

2.3.1.Read/Write Operation Sequence (80 series CPU)

V_{DD}=4.5~5.5V

| Parameter | | Symbol | Min. | Max. | Units |
|--------------------------|-------|--------------------|------|------|-------|
| Address Hold Time | | t _{AH8} | 0 | - | ns |
| Address Setup Time | | t _{AW8} | 0 | - | ns |
| System Write Cycle Time | | t _{WCYC8} | 500 | | ns |
| System Read Cycle Time | | t _{RCYC8} | 7000 | - | ns |
| Control Low Pulse Width | WRITE | t _{CCLW} | 200 | - | ns |
| | READ | t _{CCLR} | 3000 | - | ns |
| Control High Pulse Width | WRITE | t _{CCHW} | 200 | - | ns |
| | READ | t _{CCHR} | 200 | - | ns |
| Data Setup Time | | t _{DS8} | 200 | - | ns |
| Data Hold Time | | t _{DH8} | 30 | - | ns |
| RD Access Time(CL=100pF) | | t _{ACC8} | - | 3500 | ns |
| Output Disable Time | | t _{OH8} | 5 | 200 | ns |

*1:This is in case of making the access by \overline{WR} and \overline{RD} , setting the \overline{CS} =LOW.


*2:This is in case of making the access by \overline{CS} , setting the \overline{WR} , \overline{RD} =LOW.

*3: Input signal rise and fall time (tr, tf) must not exceed 15 ns.

When the system cycle time is used at a high speed, it is specified by $(tr+tf) \leq (tcyc8 - tcclw - tcchW)$
or $(tr+tf) \leq (tcyc8 - tcclr - tcchr)$.

*4:Timing is entirely specified with reference to 20% or 80 % of V_{DD}.

*5:tcclw and tcclr are specified in terms of the overlapped period when \overline{CS} is at LOW level and \overline{WR} and \overline{RD} are at LOW level.

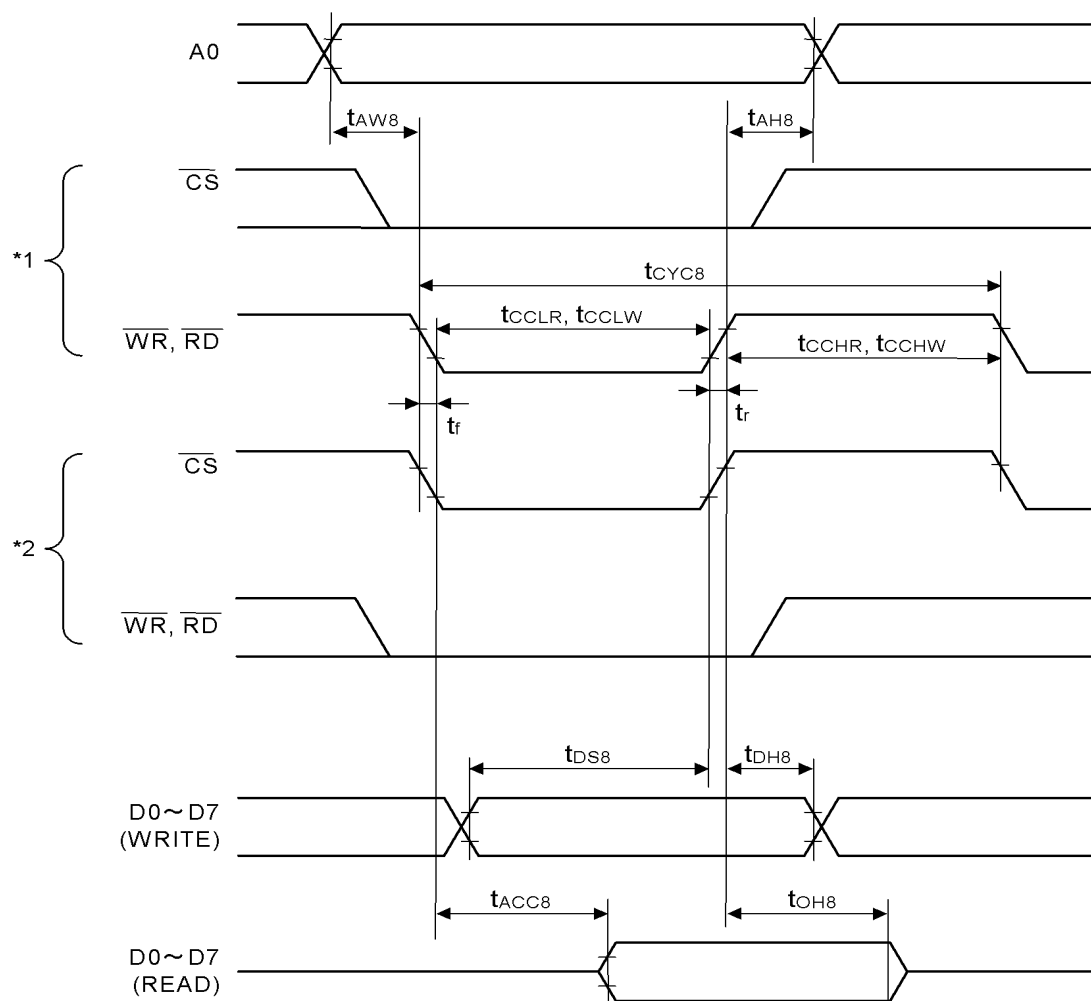

*1: This is in case of making the access by \overline{WR} and \overline{RD} , setting the $\overline{CS} = \text{LOW}$.

*2: This is in case of making the access by \overline{CS} , setting the $\overline{WR}, \overline{RD} = \text{LOW}$.


2.3.2.Display Control Timing Characteristics

Reset Input Timing

$V_{DD}=4.5\sim 5.5V$

| Parameter | Symbol | Min. | Typ. | Max. | Units |
|-----------------------|----------|------|------|------|---------|
| Reset time | t_R | - | - | 1000 | μs |
| Reset "L" Pulse Width | t_{RW} | 1000 | - | - | |

*1: Timing is entirely specified with reference to 20% or 80% of V_{DD} .

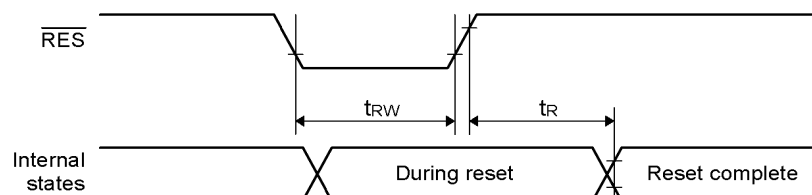


2.4. Lighting Specifications

2.4.1. Absolute Maximum Ratings

Ta=25°C

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Units |
|-----------------------|----------------|------------|------|------|------|-------|
| Foward Current | I _F | Note 1 | - | - | 360 | mA |
| Reverse Voltage | V _R | - | - | - | 5 | V |
| LED Power Dissipation | P _D | - | - | - | 1440 | mW |

Note 1 : Refer to the foward current derating curve.

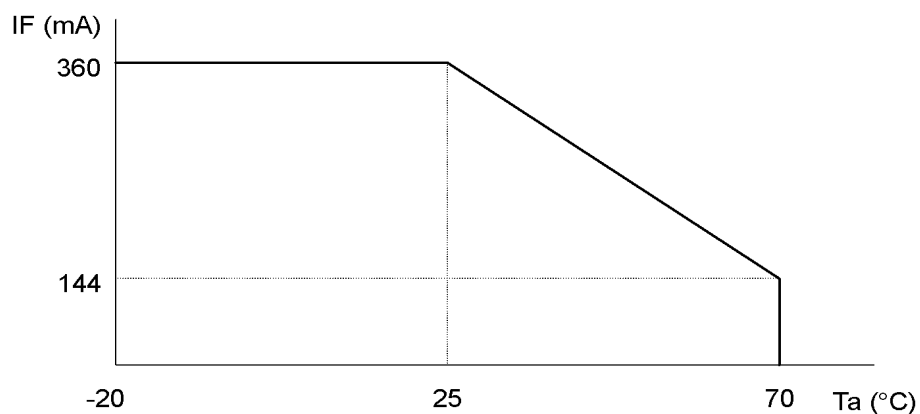

2.4.2. Operating Characteristics

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Units |
|--------------------------------|----------------|-----------------------|------|------|------|-------------------|
| Foward Voltage | V _F | I _F =180mA | - | 3.5 | 4.0 | V |
| Luminance of Module Surface | L | I _F =180mA | 28 | 40 | - | cd/m ² |

3. Optical Specifications (MLA Driving)

3.1. Optical Characteristics

$T_a=25^{\circ}\text{C}$, 1/65 Duty, 1/8 Bias, $V_{OD}=10.1\text{V}$ (Note 4), $\theta=0^{\circ}$, $\phi=-^{\circ}$

| Parameter | | Symbol | Conditions | Min. | Typ. | Max. | Units |
|----------------|--------------|-----------|---------------------------------------|------|------|------|-------|
| Contrast Ratio | Note 1 | CR | $\theta=0^{\circ}$, $\phi=-^{\circ}$ | - | 5.0 | - | |
| Viewing Angle | | | Shown in 3.2 | | | | |
| Response Time | Rise Note 2 | T_{ON} | - | - | 125 | 200 | ms |
| | Decay Note 3 | T_{OFF} | - | - | 200 | 300 | ms |

Note 1 : Contrast ratio is defined as follows. ($CR = L_{OFF} / L_{ON}$)

L_{ON} : Luminance of the ON segments

L_{OFF} : Luminance of the OFF segments

Measuring Spot : $3.0\text{mm}\phi$

Note 2 : The time that the luminance level reaches 90% of the saturation level from 0% when ON signal is applied.

Note 3 : The time that the luminance level reaches 10% of the saturation level from 100% when OFF signal is applied.


Note 4 : Definition of Driving Voltage V_{OD}

Assuming that the typical driving waveforms shown below are applied to the LCD Panel at 1/A Duty - 1/B Bias (A: Duty Number, B: Bias Number). Driving voltage V_{OD} is defined as follows.

$$V_{OD} = (V_{th1} + V_{th2}) / 2$$

V_{th1} : The voltage V_{O-P} that should provide 70% of the saturation level in the luminance at the segment which the ON signal is applied to.


V_{th2} : The voltage V_{O-P} that should provide 20% of the saturation level in the luminance at the segment which the OFF signal is applied to.

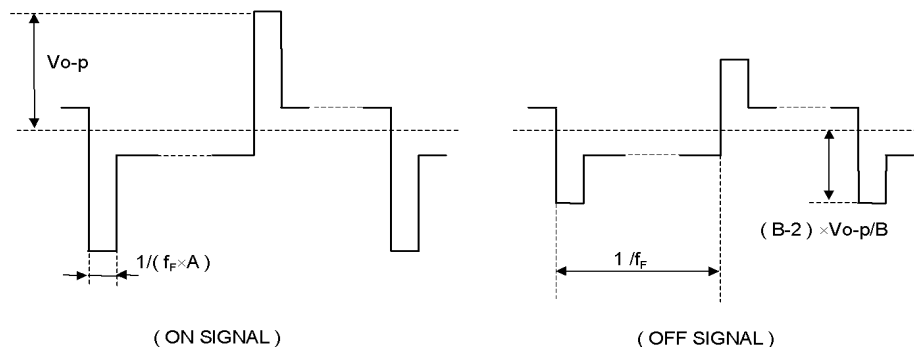


3.2. Definition of Viewing Angle and Optimum Viewing Area


*Point ● shows the point where contrast ratio is measured. : $\theta = 0^\circ$, $\phi = -^\circ$

*Driving condition: 1/65 Duty, 1/8 Bias, $V_{OD}=10.1V$, $f_F=72Hz$

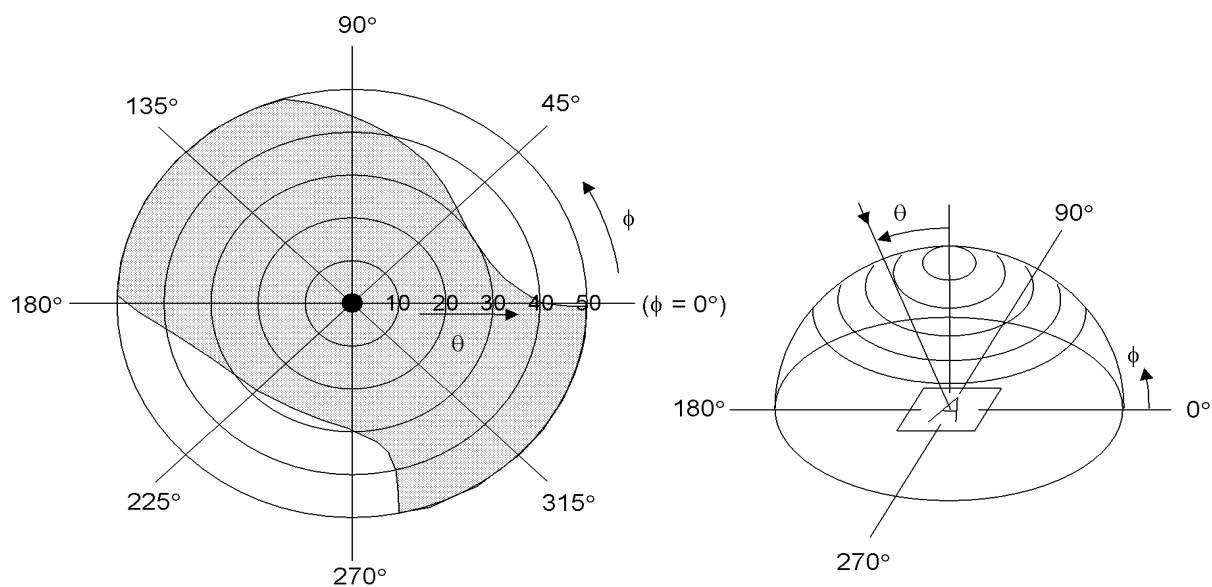

*Area  shows typ. $CR \geq 2.5$ (Measuring Spot : $3.0mm\phi$)

3.3. System Block Diagram

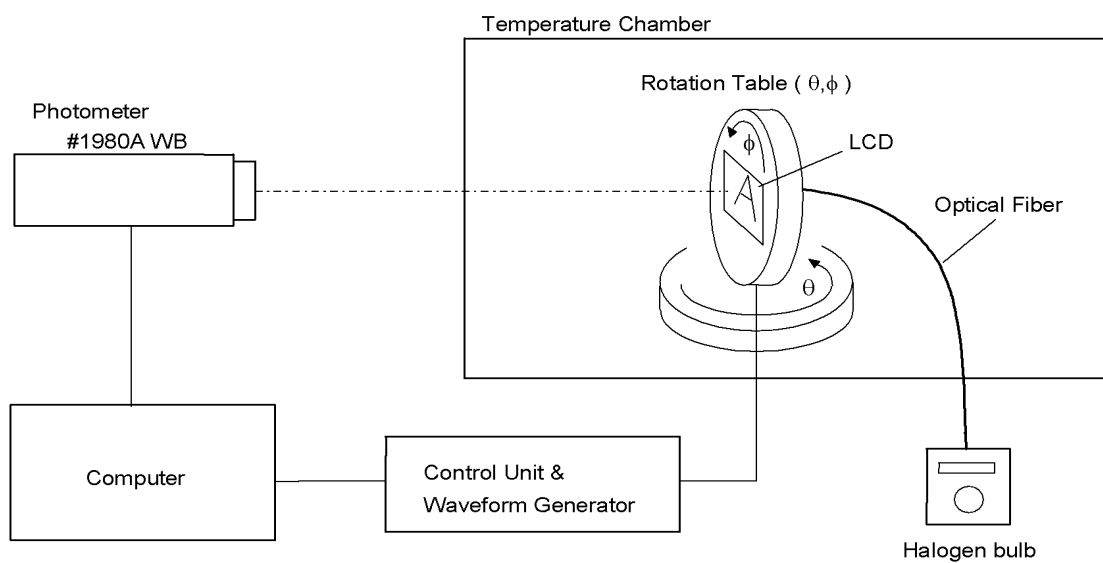

4. I/O Terminal


4.1. Pin Assignment

CN1

| No. | Symbol | Function |
|-----|-------------------------|---|
| 1 | $\overline{\text{CS1}}$ | Chip Select Signal L : Active(Upper Display) |
| 2 | $\overline{\text{CS2}}$ | Chip Select Signal L : Active(Lower Display) |
| 3 | $\overline{\text{RES}}$ | Reset Signal L : Reset |
| 4 | A0 | H : D0~D7 are Display Data L : D0~D7 are Instructions |
| 5 | $\overline{\text{WR}}$ | 80 family CPU : Write Signal L : Active |
| 6 | $\overline{\text{RD}}$ | 80 family CPU : Read Signal L : Active |
| 7 | D0 | Display Data |
| 8 | D1 | Display Data |
| 9 | D2 | Display Data |
| 10 | D3 | Display Data |
| 11 | D4 | Display Data |
| 12 | D5 | Display Data |
| 13 | D6 | Display Data |
| 14 | D7 | Display Data |
| 15 | V _{SS} | Power Supply (0V, GND) |
| 16 | V _{DD} | Power Supply for Logic |
| 17 | V _{OUT} *1 | Monitor Terminal for DC/DC Voltage Converter Output |
| 18 | V ₃ *1 | Monitor Terminal for LCD Driving Voltage |
| 19 | LED +A | LED Anode Terminal |
| 20 | LED -K | LED Cathode Terminal |

*1:Normally, No connection(NC) to the pin 17 and the pin 18 for operation.

4.2. Block Diagram

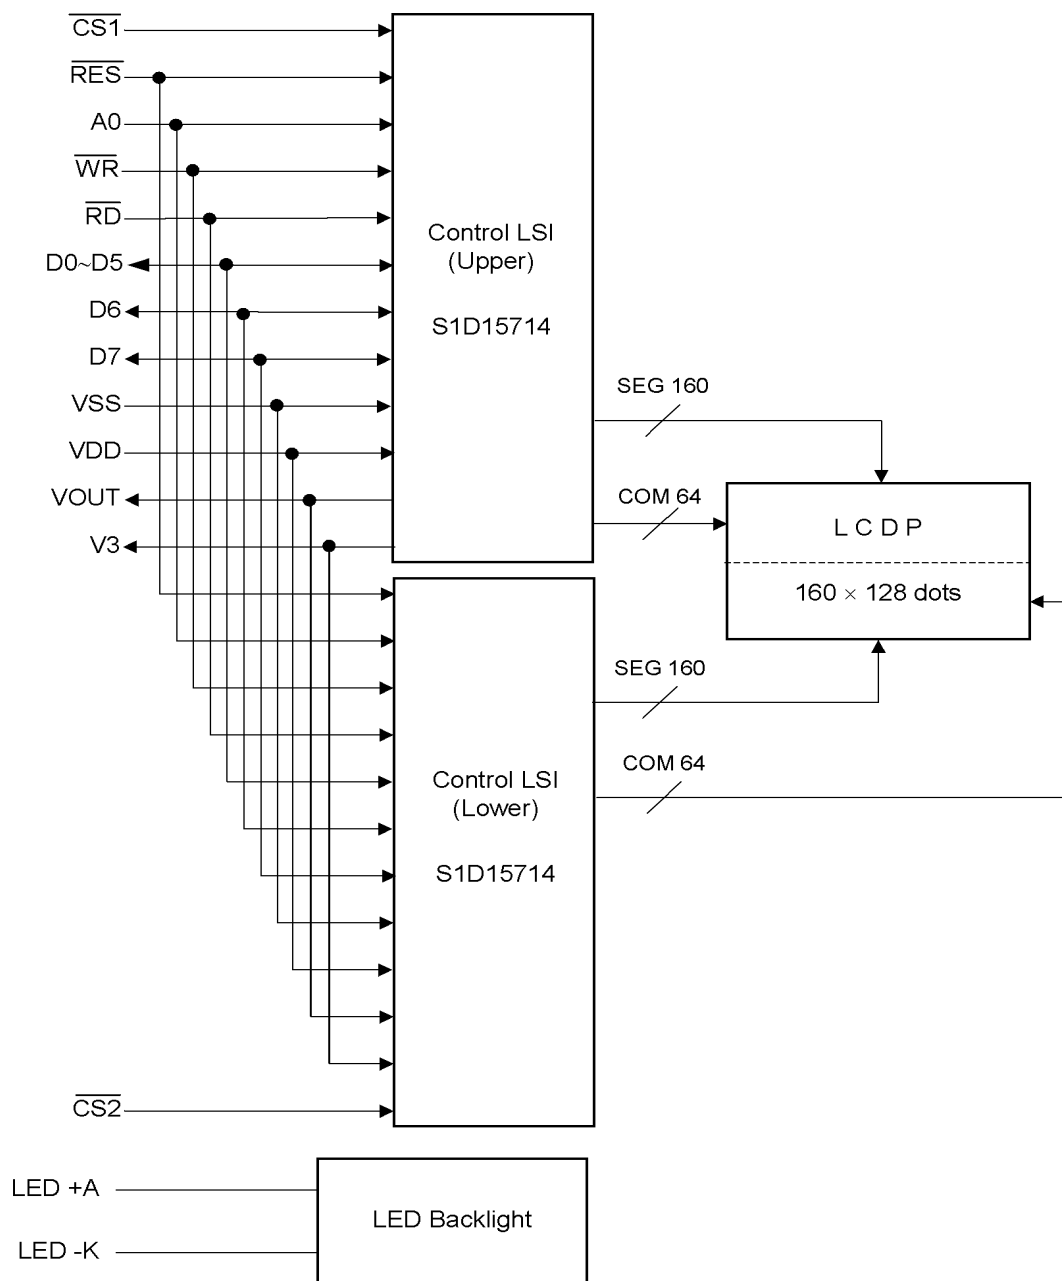

5. Test


No abnormal function and appearance are found after the following tests.

Conditions: Unless otherwise specified, tests will be conducted under the following condition.

Temperature: $20\pm 5^{\circ}\text{C}$

Humidity : $65\pm 5\%\text{RH}$

tests will be not conducted under functioning state.

| No. | Parameter | Conditions | Notes |
|-----|----------------------------|---|-------|
| 1 | High Temperature Operating | $70^{\circ}\text{C}\pm 2^{\circ}\text{C}$, 96hrs (operation state) | |
| 2 | Low Temperature Operating | $-20^{\circ}\text{C}\pm 2^{\circ}\text{C}$, 96hrs (operation state) | 1 |
| 3 | High Temperature Storage | $70^{\circ}\text{C}\pm 2^{\circ}\text{C}$, 96hrs | 2 |
| 4 | Low Temperature Storage | $-20^{\circ}\text{C}\pm 2^{\circ}\text{C}$, 96hrs | 1,2 |
| 5 | Damp Proof Test | $40^{\circ}\text{C}\pm 2^{\circ}\text{C}$, 90~95%RH, 96hrs | 1,2 |
| 6 | Vibration Test | Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X, Y, Z each 15 minutes | 3 |
| 7 | Shock Test | To be measured after dropping from 60cm high the concrete surface in packing state.  | |

Note 1 :No dew condensation to be observed.

Note 2 :The function test shall be conducted after 4 hours storage at the normal

Temperature and humidity after removed from the test chamber.

Note 3 :Vibration test will be conducted to the product itself without putting it in a container.


6. Appearance Standards

6.1. Inspection conditions


The LCD shall be inspected under 40W white fluorescent light.

The distance between the eyes and the sample shall be more than 30cm.

All directions for inspecting the sample should be within 45° against perpendicular line.

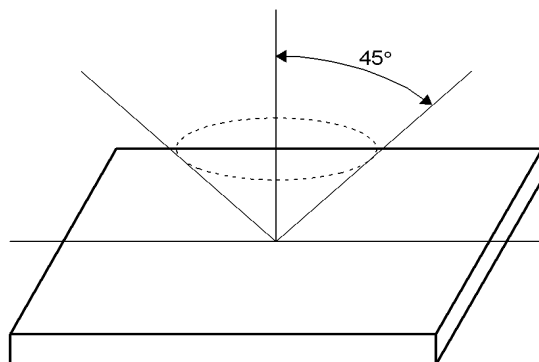

6.2. Definition of applicable Zones

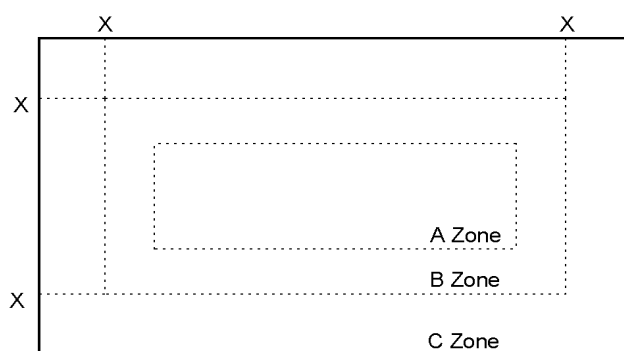

X : Maximum Seal Line

A Zone : Active display area




B Zone : Out of active display area ~ Maximum seal line

C Zone : Rest parts

A Zone + B Zone = Validity viewing area

6.3.Standards(middle scale, LED)

$D = (\text{Long} + \text{Short}) / 2$ * : Disregard Units : mm


| No. | Parameter | Criteria | | | | | | |
|---|--|---|---|-------------------|----------------------|--|----------------------|--|
| 1 | The Shape of Dot | (1) Pin Hole | | | | | | |
| | |  | | | | | | |
| | | <table><tr><th>Dimension</th><th>Acceptable Number</th></tr><tr><td>$D \leq 0.10$</td><td>*</td></tr><tr><td>$0.10 < D \leq 0.20$</td><td>1 pc / dot(only segment)or less 5 pcs / cell or less</td></tr></table> | Dimension | Acceptable Number | $D \leq 0.10$ | * | $0.10 < D \leq 0.20$ | 1 pc / dot(only segment)or less 5 pcs / cell or less |
| | | Dimension | Acceptable Number | | | | | |
| | | $D \leq 0.10$ | * | | | | | |
| | | $0.10 < D \leq 0.20$ | 1 pc / dot(only segment)or less 5 pcs / cell or less | | | | | |
| | | (2) Breakage or Chips / Deformation | | | | | | |
| | | 1.Dot Type | | | | | | |
| | |  | | | | | | |
| | | <table><tr><th>Dimension</th><th>Acceptable Number</th></tr><tr><td>$A \leq 0.10$</td><td>* (Should not be connected to next dot)</td></tr><tr><td>$0.10 < A \leq 0.15$</td><td>1 pc / dot(only segment)or less 5 pcs / cell or less (Should not be connected to next dot)</td></tr><tr><td>$B \leq 0.15$</td><td>*</td></tr></table> | Dimension | Acceptable Number | $A \leq 0.10$ | * (Should not be connected to next dot) | $0.10 < A \leq 0.15$ | 1 pc / dot(only segment)or less 5 pcs / cell or less (Should not be connected to next dot) |
| Dimension | Acceptable Number | | | | | | | |
| $A \leq 0.10$ | * (Should not be connected to next dot) | | | | | | | |
| $0.10 < A \leq 0.15$ | 1 pc / dot(only segment)or less 5 pcs / cell or less (Should not be connected to next dot) | | | | | | | |
| $B \leq 0.15$ | * | | | | | | | |
| 2.Defective type extends over multiple numbers of dots | | | | | | | | |
|  | | | | | | | | |
| <table><tr><th>Dimension</th><th>Acceptable Number</th></tr><tr><td>$D \leq 0.10$</td><td>*</td></tr><tr><td>$0.10 < D \leq 0.20$</td><td>1 pc / dot(only segment)or less 5 pcs / cell or less (Individual dot must secure 1/2 area or more)</td></tr></table> | Dimension | Acceptable Number | $D \leq 0.10$ | * | $0.10 < D \leq 0.20$ | 1 pc / dot(only segment)or less 5 pcs / cell or less (Individual dot must secure 1/2 area or more) | | |
| Dimension | Acceptable Number | | | | | | | |
| $D \leq 0.10$ | * | | | | | | | |
| $0.10 < D \leq 0.20$ | 1 pc / dot(only segment)or less 5 pcs / cell or less (Individual dot must secure 1/2 area or more) | | | | | | | |

$$D = (\text{Long} + \text{Short}) / 2 \quad * : \text{Disregard} \quad \text{Units : mm}$$

| No. | Parameter | Criteria | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|--|--------------------------------------|-------------------|--|--|--|---|---|---|---------------|---|---|---|----------------------|---|---|---|----------------------|---|---|---|--|-------------------|--|--|--|---|---|---|--|---|---|---|--|---|---|---|--|---|---|---|--|---------------------|--|---|
| 2 | Black and White Spots, Foreign Substances | <div>(1) Round Shape</div> <table><tr><th><div>Zone</div><div>Dimension</div></th><th colspan="3">Acceptable Number</th></tr><tr><th></th><th>A</th><th>B</th><th>C</th></tr><tr><td>$D \leq 0.10$</td><td>*</td><td>*</td><td>*</td></tr><tr><td>$0.10 < D \leq 0.20$</td><td>6</td><td>6</td><td>*</td></tr><tr><td>$0.20 < D \leq 0.30$</td><td>4</td><td>4</td><td>*</td></tr></table> <div>Individual dot must secure 1/2 area or more.</div> <div>(2) Line Shape</div> <table><tr><th><div>Zone</div><div>Length Width</div></th><th colspan="3">Acceptable Number</th></tr><tr><th></th><th>A</th><th>B</th><th>C</th></tr><tr><td><div>*</div><div>$W \leq 0.03$</div></td><td>*</td><td>*</td><td>*</td></tr><tr><td><div>$L \leq 2.0$</div><div>$0.03 < W \leq 0.05$</div></td><td>5</td><td>5</td><td>*</td></tr><tr><td><div>$L \leq 1.0$</div><div>≤ 0.10</div></td><td>4</td><td>4</td><td>*</td></tr><tr><td><div>*</div><div>$0.10 < W$</div></td><td colspan="2">In the same way (1)</td><td>*</td></tr></table> <div>No more than 9pcs as total. (Refer to “Complex Foreign Substance Defects”)</div> | <div>Zone</div> <div>Dimension</div> | Acceptable Number | | | | A | B | C | $D \leq 0.10$ | * | * | * | $0.10 < D \leq 0.20$ | 6 | 6 | * | $0.20 < D \leq 0.30$ | 4 | 4 | * | <div>Zone</div> <div>Length Width</div> | Acceptable Number | | | | A | B | C | <div>*</div> <div>$W \leq 0.03$</div> | * | * | * | <div>$L \leq 2.0$</div> <div>$0.03 < W \leq 0.05$</div> | 5 | 5 | * | <div>$L \leq 1.0$</div> <div>≤ 0.10</div> | 4 | 4 | * | <div>*</div> <div>$0.10 < W$</div> | In the same way (1) | | * |
| <div>Zone</div> <div>Dimension</div> | Acceptable Number | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | A | B | C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $D \leq 0.10$ | * | * | * | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $0.10 < D \leq 0.20$ | 6 | 6 | * | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $0.20 < D \leq 0.30$ | 4 | 4 | * | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div>Zone</div> <div>Length Width</div> | Acceptable Number | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | A | B | C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div>*</div> <div>$W \leq 0.03$</div> | * | * | * | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div>$L \leq 2.0$</div> <div>$0.03 < W \leq 0.05$</div> | 5 | 5 | * | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div>$L \leq 1.0$</div> <div>≤ 0.10</div> | 4 | 4 | * | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div>*</div> <div>$0.10 < W$</div> | In the same way (1) | | * | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Color Variation | Not to be conspicuous defects. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | Air Bubbles (between glass & polarizer) | <table><tr><th><div>Zone</div><div>Dimension</div></th><th colspan="3">Acceptable Number</th></tr><tr><th></th><th>A</th><th>B</th><th>C</th></tr><tr><td>$D \leq 0.30$</td><td>*</td><td>*</td><td>*</td></tr><tr><td>$0.30 < D \leq 0.40$</td><td>3</td><td>*</td><td>*</td></tr><tr><td>$0.40 < D \leq 0.60$</td><td>2</td><td>3</td><td>*</td></tr></table> <div>No more than 3pcs as total. (Refer to “Complex Foreign Substance Defects”)</div> | <div>Zone</div> <div>Dimension</div> | Acceptable Number | | | | A | B | C | $D \leq 0.30$ | * | * | * | $0.30 < D \leq 0.40$ | 3 | * | * | $0.40 < D \leq 0.60$ | 2 | 3 | * | | | | | | | | | | | | | | | | | | | | | | | | |
| <div>Zone</div> <div>Dimension</div> | Acceptable Number | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | A | B | C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $D \leq 0.30$ | * | * | * | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $0.30 < D \leq 0.40$ | 3 | * | * | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $0.40 < D \leq 0.60$ | 2 | 3 | * | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | Polarizer Scratches | Not to be conspicuous defects. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | Polarizer Dirts | If the stains are removed easily from LCDP surface, the module is not defective. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | Complex Foreign Substance Defects | Black spots, line shaped foreign substances or air bubbles between glass & polarizer should be 9pcs maximum in total. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | Distance between Different Foreign Substance Defects | 20mm or more | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

7. Code System of Production Lot

The production lot of module is specified as follows.

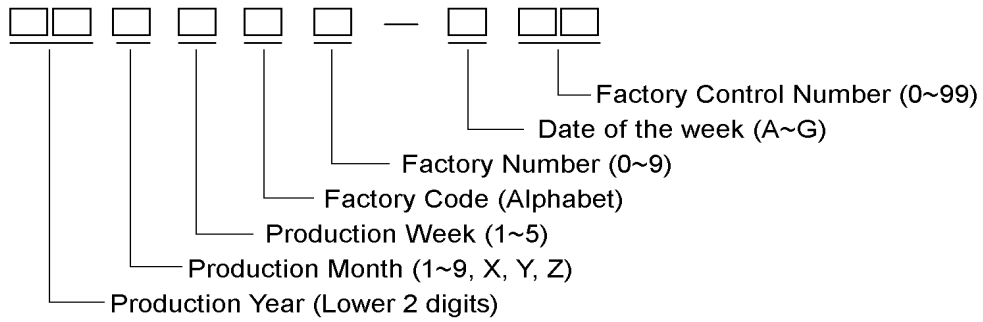

8. Type Number

The type number of module is specified as follows.

F-51854GNFJ-SLW-ABN

9. Applying Precautions

Please contact us when questions and/or new problems not specified in this Specifications arise.

10. Precautions Relating Product Handling

The Following precautions will guide you in handling our product correctly.

1) Liquid crystal display devices

1. The liquid crystal display panel used in the liquid crystal display module is made of plate glass. Avoid any strong mechanical shock. Should the glass break handle it with care. The polarizer adhering to the surface of the LCD is made of a soft material. Guard against scratching it.



2) Care of the liquid crystal display module against static electricity discharge.

1. When working with the module, be sure to ground your body and any electrical equipment you may be using. We strongly recommend the use of anti static mats (made of rubber), to protect worktables against the hazards of electrical shock.
2. Avoid the use of work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.
3. Slowly and carefully remove the protective film from the LCD module, since this operation can generate static electricity.

3) When the LCD module must be stored for long periods of time:

1. Protect the modules from high temperature and humidity.

Conditions: Temperature: 0°C~40°C

Humidity : Less than 60%RH

No dew condensation to be observed.

2. Keep the modules out of direct sunlight or direct exposure to ultraviolet rays.

3. Protect the modules from excessive external forces.

- 4) Use the module with a power supply that is equipped with an overcurrent protector circuit, since the module is not provided with this protective feature.

- 5) Do not ingest the LCD fluid itself should it leak out of a damaged LCD module. Should hands or clothing come in contact with LCD fluid, wash immediately with soap.

- 6) Conductivity is not guaranteed for models that use metal holders where solder connections between the metal holder and the PCB are not used. Please contact us to discuss appropriate ways to assure conductivity.

7) For models which use CFL:

1. High voltage of 1000V or greater is applied to the CFL cable connector area.

Care should be taken not to touch connection areas to avoid burns.

2. Protect CFL cables from rubbing against the unit and thus causing the wire jacket to become worn.

3. The use of CFLs for extended periods of time at low temperatures will significantly shorten their service life.

4. After storing the product (or LCD) under low temperature and/or in dark atmosphere for a long period of time, CCFL may take longer time to reach its specified brightness.

8) For models which use touch panels:

1. Do not stack up modules since they can be damaged by components on neighboring modules.
2. Do not place heavy objects on top of the product. This could cause glass breakage.

9) For models which use COG,TAB,or COF:

- 1.The mechanical strength of the product is low since the IC chip faces out unprotected from the rear. Be sure to protect the rear of the IC chip from external forces.
- 2.Given the fact that the rear of the IC chip is left exposed, in order to protect the unit from electrical damage, avoid installation configurations in which the rear of the IC chip runs the risk of making any electrical contact.

10)Models which use flexible cable, heat seal, or TAB:

- 1.In order to maintain reliability, do not touch or hold by the connector area.
- 2.Avoid any bending, pulling, or other excessive force, which can result in broken connections.

11)In case of buffer material such as cushion / gasket is assembled into LCD module, it may have an adverse effect on connecting parts (LCD panel-TCP / HEAT SEAL / FPC / etc., PCB-TCP / HEAT SEAL / FPC etc., TCP-HEAT SEAL, TCP-FPC, HEAT SEAL-FPC, etc.,) depending on its materials. Please check and evaluate these materials carefully before use.

12)In case of acrylic plate is attached to front side of LCD panel, cloudiness (very small cracks) can occur on acrylic plate, being influenced by some components generated from polarizer film. Please check and evaluate those acrylic materials carefully before use.

11. Warranty

This product has been manufactured to your company's specifications as a part for use in your company's general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment, we cannot take responsibility if the product is used in medical devices, nuclear power control equipment, aerospace equipment, fire and security systems, or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required. If the product is to be used in any of the above applications, we will need to enter into a separate product liability agreement.

1. We cannot accept responsibility for any defect, which may arise from additional manufacturing of the product (including disassembly and reassembly), after product delivery.
2. We cannot accept responsibility for any defect, which may arise after the application of strong external force to the product.
3. We cannot accept responsibility for any defect, which may arise due to the application of static electricity after the product has passed your company's acceptance inspection procedures.
4. When the product is in CFL models, CFL service life and brightness will vary according to the performance of the inverter used, leaks, etc. We cannot accept responsibility for product performance, reliability, or defect, which may arise.
5. We cannot accept responsibility for intellectual property of a third party, which may arise through the application of our product to your assembly with exception to those issues relating directly to the structure or method of manufacturing of our product.
6. We will not be held responsible for any quality issue(s) after two years and beyond from its production date indicated on the lot number (please refer to "Code System of Production Lot" indicated earlier in this specification).