



AAvid - The worldwide leader in thermal management solutions

[News](#) [About Aavid](#) [Contact Us](#) [Global Manufacturing](#) [Shop Aavid](#)

[Products](#)

[Solutions](#)

[Industries](#)

Search Aavid

[Your Account](#)

[Logout](#)


[Cart](#)

[Knowledge Center](#)

[Design Help](#)

» [Mounting Pads](#)

7717-7NG

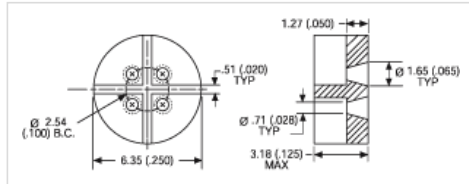

Standard Mounting Pads, TO-18

Nylon

Leads: 4

Heat Sink Diameter: 6.35

Thickness: 3.18

[Download PCN](#)

QTY IN STOCK: 100

ENTER QTY:

[VIEW PRICE](#)

Need assistance?

Call us: 1-855-32-AAVID

Email: estore@aavid.com

[» Help Page](#)

The Fine Print

[Product Return Policy](#)

[Terms & Conditions](#)

[Privacy Policy](#)

Material Specifications

		Maximum Operating Temperature		
Suffix	Base Material	Continuous	Deflection	Color
-N	Nylon base resin per ASTM STD D4066-82 PA111	121.0°C 250°F	243.3°C 470°F	Natural
-DAP*	Diallyl Phthalate per MIL-M-14G Type SDG	204.4°C 400°F	282.2°C 540°F	Black only

* All "-DAP" mounting pads meet UL 94V-0

Note: Please specify material for each mounting pad:

"N" = nylon; "Dap" = Diallyl Phthalate.

Example: 7717-3N, 7717-86DAP

Customer Assistance

[Contact Us](#)
[Get Design Assistance](#)
[Find a Distributor](#)
[Find a Sales Rep](#)
[Request a Quote](#)
[Placing an Order](#)
[Terms and Conditions](#)
[Returns](#)

Popular Products

[Fans](#)
[Extrusions](#)
[Board Level](#)
[Liquid Cooling](#)
[Heat Pipe Technology](#)
[Heat Sink Accessories](#)
[Interface Materials](#)

Our Company

[News and Events](#)
[Management Team](#)
[Worldwide Locations](#)
[Directions to USA Headquarters](#)
[Disclaimer](#)
[Customer Survey](#)
[Privacy Policy](#)
[Careers](#)

Connect with Aavid

Sign up for Aavid News & Alerts

Email Address

[GO!](#)

Like / Follow / Connect



© Copyright 2015 Aavid Thermalloy, LLC.

USA: 1.855.32.AAVID Europe: 39.051.764002 Asia: 86.21.6115.2000 x 8122