

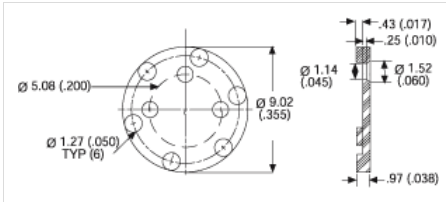

[Asia](#) | [Europe](#) | [Kunze](#)

[Register or Sign Into
Your Account](#)
[Cart](#)

Aavid - The worldwide leader in thermal management solutions

[News](#) [About Aavid](#) [Contact Us](#) [Global Manufacturing](#) [Shop Aavid](#)
[Products](#)
[Solutions](#)
[Industries](#)
[Knowledge Center](#)
[Design Help](#)
[» Mounting Pads](#)

7717-79NG



Standard Mounting Pads, TO-5

Nylon

Leads: 3

Heat Sink Diameter: 9.02

Thickness: 0.97

[Download PCN](#)

QTY IN STOCK: 1,000

ENTER QTY:

Need assistance?

Call us: 1-855-32-AAVID
Email: estore@aavid.com

[» Help Page](#)

The Fine Print

[Product Return Policy](#)
[Terms & Conditions](#)
[Privacy Policy](#)

Material Specifications

Suffix	Base Material	Maximum Operating Temperature		
		Continuous	Deflection	Color
-N	Nylon base resin per ASTM STD D4066-82 PA111	121.0°C 250°F	243.3°C 470°F	Natural
-DAP	Diallyl Phthalate per MIL-M-14G Type SDG	204.4°C 400°F	282.2°C 540°F	Black only

* All "-DAP" mounting pads meet UL 94V-0

Note: Please specify material for each mounting pad:

"N" = nylon; "Dap" = Diallyl Phtalante.

Example: 7717-3N, 7717-86DAP

Customer Assistance

- Contact Us
- Get Design Assistance
- Find a Distributor
- Find a Sales Rep
- Request a Quote
- Placing an Order
- Terms and Conditions
- Returns

Popular Products

- Fans
- Extrusions
- Board Level
- Liquid Cooling
- Heat Pipe Technology
- Heat Sink Accessories
- Interface Materials

Our Company

- News and Events
- Management Team
- Worldwide Locations
- Directions to USA Headquarters
- Disclaimer
- Customer Survey
- Privacy Policy
- Careers

Connect with Aavid

Sign up for Aavid News & Alerts

Like / Follow / Connect



© Copyright 2015 Aavid Thermalloy, LLC.

USA: 1.855.32.AAVID Europe: 39.051.764002 Asia: 86.21.6115.2000 x 8122