



Aavid - The worldwide leader in thermal management solutions

Products

Shop Aavid


Industries

Knowledge Center

Design Help

» Mounting Pads

7717-178NG

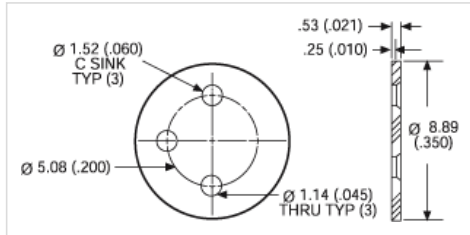

Standard Mounting Pads, TO-5

Nylon

Leads: 3

Heat Sink Diameter: 8.89

Thickness: 0.53

[Download PCN](#)

ENTER QTY:

VIEW PRICE

Need assistance?

Call us: 1-855-32-AAVID
Email: estore@aavid.com

» [Help Page](#)

The Fine Print

[Product Return Policy](#)
[Terms & Conditions](#)
[Privacy Policy](#)

Material Specifications

Suffix	Base Material	Maximum Operating Temperature		
		Continuous	Deflection	Color
-N	Nylon base resin per ASTM STD D4066-82 PA111	121.0°C 250°F	243.3°C 470°F	Natural
-DAP*	Diallyl Phthalate per MIL-M-14G Type SDG	204.4°C 400°F	282.2°C 540°F	Black only

* All "-DAP" mounting pads meet UL 94V-0

Note: Please specify material for each mounting pad:

"N" = nylon; "Dap" = Diallyl Phtalante.

Example: 7717-3N, 7717-86DAP

Customer Assistance

- Contact Us
- Get Design Assistance
- Find a Distributor
- Find a Sales Rep
- Request a Quote
- Placing an Order
- Terms and Conditions
- Returns

Popular Products

- Fans
- Extrusions
- Board Level
- Liquid Cooling
- Heat Pipe Technology
- Heat Sink Accessories
- Interface Materials

Our Company

- News and Events
- Management Team
- Worldwide Locations
- Disclaimer
- Customer Survey
- Privacy Policy
- Careers

Connect with Aavid

Like / Follow / Connect



© Copyright 2016 Aavid Thermalloy, LLC.

USA: 1.855.32.AAVID Europe: 39.051.764002 Asia: 86.21.6115.2000 x 8122