



Aavid - The worldwide leader in thermal management solutions

 **Products**

 **Shop Aavid**

 **Industries**

 **Knowledge Center**

 **Design Help**

Interface Materials

- > Gap Fillers
- > Thermal Greases
- > Thermal Adhesives & Epoxies
- > Attachment Tapes
- > Insulating Hardware
- > Insulating Pads & Films
 - > Thermalfilm
 - > Thermalfilm MT
 - > Thermalsil III
 - > In-Sil-8
- > Non-Insulating Pads & Films
- > Phase Change Materials
- > [Request a Sample](#)
- > [Request a Quote](#)
- > [Ask an Engineer](#)

Insulating Films

Thermalfilm and Thermalfilm MT Polyimide Plastic Films

RoHS Compliant

Thermalfilm and Thermalfilm MT are low cost polyimide plastic insulating films designed to be an improved replacement for mica. These insulators have a distinctive amber color and can be easily recognised and assembled on a production line

Thermalfilm MT, made from high performance Kapton MT material, provides thermal conductivity nearly 2-5 times greater than standard Thermalfilm.


Both insulators have an extremely high resistance to flow or thin out under high compressive stresses, particularly at elevated temperatures.

Excellent physical, mechanical and electrical properties remain nearly constant over a wide range of temperatures and frequencies. They are radiation resistant, have no melting points, and have no known organic solvents.

The polyimide plastic film is UL listed as a component in UL's publication "Component - Plastic Material" dated September 18, 1969. The UL card number is E39505R, Guide QMFZ2 filed by E.I. du Pont de Nemours & Co., Inc. Thermalfilm is rated 94 V-O.


Notes:
Thermalfilm MT part numbers begin with "46".
Insulator thickness is .05mm +/- 0.006mm (0.002" +/- 0.00025") unless otherwise specified.
Dimensional tolerances are +/- 0.38mm(0.015"), hole diameters are +/- 0.25mm (0.010") and angularity is +/- 1 1/2° unless otherwise specified.

For TO-3

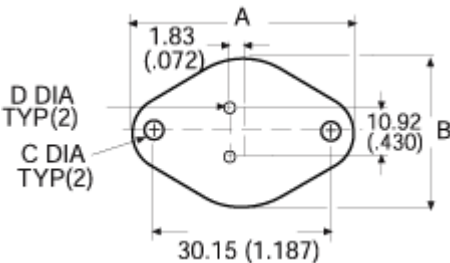


Part	A	B	C	D	Buy
43-03-1G	43.94 (1.730)	31.75 (1.250)	3.56 (0.140)	1.57 (0.062)	
43-03-2G	42.04 (1.655)	27.00 (1.063)	3.96 (0.156)	1.57 (0.062)	
43-03-3G	42.04 (1.655)	27.00 (1.063)	3.96 (0.156)	4.22 (0.166)	
43-03-4G	39.70 (1.563)	26.67 (1.050)	3.56 (0.140)	1.57 (0.062)	
43-03-6G	42.04 (1.655)	28.58 (1.125)	3.96 (0.156)	1.57 (0.062)	

For TO-5 and TO-18

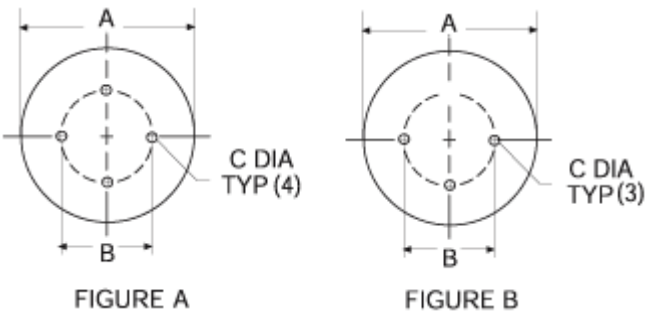


Part	Fig.	A	B	C	Buy
43-05-1G (TO-5)	A	9.91 (0.390)	5.08 (0.200)	0.91 (0.036)	
43-05-2G (TO-5)	B	9.91 (0.390)	5.08 (0.200)	0.91 (0.036)	
43-18-1G (TO-18)	A	6.35 (0.250)	2.54 (0.100)	0.91 (0.036)	

Washer

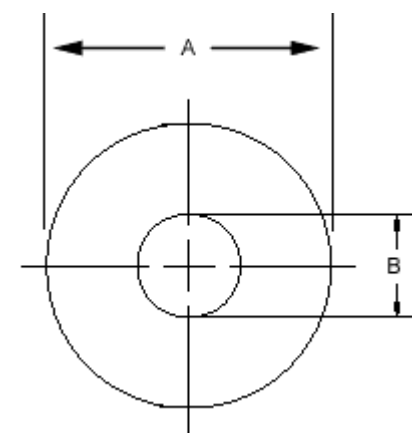

Part	Thread	A	B	Buy
43-02-4G	#4	6.35 (0.250)	3.05 (0.120)	
43-02-10G	#10	14.27 (0.562)	5.16 (0.203)	
43-02-25G	1/4"	20.62 (0.812)	6.73 (0.265)	


For TO-220, TO-126, Case 77, Case 199, Case 90, TO-218, TO-3P

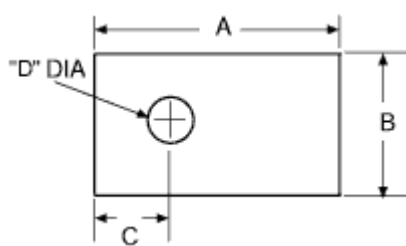

Part	A	B	C	D	Buy
43-77-1G (TO-126,case 77)	11.10 (0.437)	7.92 (0.312)	3.56 (0.140)	2.36 (0.093)	
43-77-2G (case 90,case 199)	17.45 (0.687)	14.27 (0.562)	5.54 (0.218)	3.18 (0.125)	


43-77-6G (case 90,case 199)	20.62 (0.812)	14.27 (0.562)	7.14 (0.281)	3.96 (0.156)	
43-77-8G (case 90,case 199)	18.92 (0.745)	13.84 (0.545)	5.38 (0.212)	3.81 (0.150)	
43-77-9G (TO-220)	18.42 (0.725)	13.21 (0.520)	4.32 (0.170)	2.92 (0.115)	
46-77-9G MT(TO-220)	18.42 (0.725)	13.21 (0.520)	4.32 (0.170)	2.92 (0.115)	
43-77-20G (TO-220,TO-218,TO-3P)	23.24 (0.915)	18.80 (0.740)	6.98 (0.2.75)	3.66 (0.144)	
46-77-20G MT(TO-220,TO-218,TO-3P)	23.24 (0.915)	18.80 (0.740)	6.98 (0.2.75)	3.66 (0.144)	

For TO-66

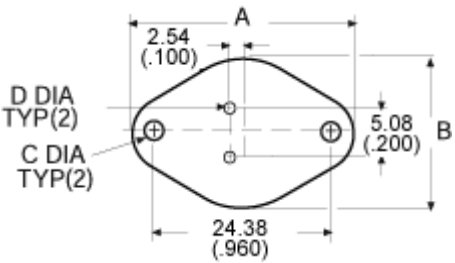

Part	A	B	C	D	Buy
43-66-2G	33.32 (1.312)	19.35 (0.762)	3.56 (0.140)	1.57 (0.062)	

For TO-218

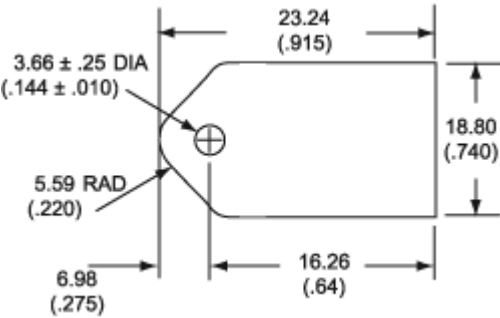

Part	Buy
43-02-95G	N/A

Bulk Thermalfilm

Part Number	RoHS	PCN
4300G 2 MIL	RoHS  Compliant	
4500 5 MIL	N/A	N/A

Additional Product Information

Thermalfilm / Thermalfilm MT

Property	Electrical -Typical Value @ 25°C		Test Method
	Thermalfilm	Thermalfilm MT	
Dielectric Strength	03mm (1 -mil) 275.6 x 103 volts/mm (7,000 volts/mil)	177.2 x 103 volts/mm (4500 volts/mm)	ASTM D149-64
Dielectric Constant	3.5	4.3	ASTM D150-64T
Dissipation Factor	0.002	0.002	ASTM D150-64T
Volume Resistivity	1017 ohm-cm	1017 ohm-cm	ASTM D257-61
Surface Resistivity	1016 ohms	1016 ohms	ASTM D257-61
Corona Start Voltage .025mm (1 -mil)	465 volts	465 volts	ASTM D1868-61T
Insulation Resistance	100.00 megohm mfs.	100.00 megohm mfs.	Based on 0.05 mfd wound capacitor using 0.25mm (1 -mil) Film
PHYSICAL			
Ultimate Tensile Strength (MD)	1.72 x 108 Pa (25,000 psi)	103 MPa (1500 psi)	ASTM D882-64T

Insulating Films - heat sink interface material			
Bursting Strength Test (Mullen)	3.10 x 105 Pa (45 psi)	0.31 MPa (45 psi)	ASTM 0774-63
Tear Strength - Initial	27,559 gm/mm (700 gm/mil)	35,433 gm/mm (900 gm/mil)	ASTM D1004-61
Density	1.42 gm/cm3 (88.7 lb/ft3)	1.78 gm/cm3 (111.1 lb/ft3)	ASTM D1505-63T
Folding Endurance(MIT)	>10,000 cycles	>10,000 cycles	ASTM D2176-63T
THERMAL			
Melting Point	None	None	
Zero Strength Temperature	815°C (1499°F)	815°C (1499°F)	Hot Bar (Du Pont Test)
Cut Through Temperature	435°C (815°F) 525°C (977°F)	435°C (815°F) 525°C (977°F)	Weighted Probe on Heated Film (Du Pont Test)
Service Temperature	-260°C to 240°C) (-464°F to 464°F)	-260°C to 240°C) (-464°F to 464°F)	
Thermal Conductivity	0.156Wm/K (0.09 BTU/hr-ft-°F)	0.379Wm/K (0.219 BTU/hr-ft-°F)	Model TC-1000 Twin Heatmeter Comparitive Tester
Flammability	V-0, UL "E" card E39505	V-0, UL "E" card E39505	UL 94

Note: One mil equals 0.001 inch

Thermalfilm Resistance Calculator

Enter the area of the device that will contact the heat sink:		mm2
	Calculate	
Interface Resistance =		

Formula

$$\frac{\text{interface resistance=}}{\frac{\text{interface thickness (mm) * 1000}}{\text{thermal conductivity (W/m-K) * contact area (mm}^2\text{)}}}$$

Thermalfilm MT Resistance Calculator

Enter the area of the device that will contact the heat sink:		mm2
	Calculate	
Interface Resistance =		

Formula

$$\frac{\text{interface resistance=}}{\frac{\text{interface thickness (mm) * 1000}}{\text{thermal conductivity (W/m-K) * contact area (mm}^2\text{)}}}$$

Customer Assistance

- [Contact Us](#)
- [Get Design Assistance](#)
- [Find a Distributor](#)
- [Find a Sales Rep](#)
- [Request a Quote](#)
- [Placing an Order](#)
- [Terms and Conditions](#)
- [Returns](#)

Popular Products

- [Fans](#)
- [Extrusions](#)
- [Board Level](#)
- [Liquid Cooling](#)
- [Heat Pipe Technology](#)
- [Heat Sink Accessories](#)
- [Interface Materials](#)

Our Company

- [News and Events](#)
- [Management Team](#)
- [Worldwide Locations](#)
- [Disclaimer](#)
- [Customer Survey](#)
- [Privacy Policy](#)
- [Careers](#)

Connect with Aavid

Like / Follow / Connect



© Copyright 2016 Aavid Thermalloy, LLC.

USA: 1.855.32.AAVID **Europe:** 39.051.764002 **Asia:** 86.21.6115.2000 x 8122