



Product Change Notification / SYST-12WUIM914

Date:

16-Nov-2021

Product Category:

8-bit Microcontrollers

PCN Type:

Document Change

Notification Subject:

ERRATA - ATmega48A/PA/88A/PA/168A/PA/328/P Silicon Errata and Data Sheet Clarification

Affected CPNs:

[SYST-12WUIM914_Affected_CPN_11162021.pdf](#)

[SYST-12WUIM914_Affected_CPN_11162021.csv](#)

Notification Text:

SYST-12WUIM914

Microchip has released a new Product Documents for the ATmega48A/PA/88A/PA/168A/PA/328/P Silicon Errata and Data Sheet Clarification of devices. If you are using one of these devices please read the document located at [ATmega48A/PA/88A/PA/168A/PA/328/P Silicon Errata and Data Sheet Clarification](#)

Notification Status: Final

Description of Change: 1. Added data sheet clarifications:

- Ordering Information
- Package Information

Impacts to Data Sheet: None

Reason for Change: To Improve Productivity

Change Implementation Status: Complete

Date Document Changes Effective: 16 Nov 2021

NOTE: Please be advised that this is a change to the document only the product has not been changed.

Markings to Distinguish Revised from Unrevised Devices: N/A

Attachments:

[ATmega48A/PA/88A/PA/168A/PA/328/P Silicon Errata and Data Sheet Clarification](#)

Please contact your local [Microchip sales office](#) with questions or concerns regarding this notification.

Terms and Conditions:

If you wish to receive Microchip PCNs via email please register for our PCN email service at our [PCN home page](#) select register then fill in the required fields. You will find instructions about registering for Microchips PCN email service in the [PCN FAQ](#) section.

If you wish to change your PCN profile, including opt out, please go to the [PCN home page](#) select login and sign into your myMicrochip account. Select a profile option from the left navigation bar and make the applicable selections.

Affected Catalog Part Numbers (CPN)

ATMEGA48PA-15MZ
ATMEGA48PA-15MZV01
ATMEGA48PA-15AZ
ATMEGA48PA-15AZV03
ATMEGA88PA-15AZT
ATMEGA88A-PU
ATMEGA88PA-PU
ATMEGA88PA-MMH
ATMEGA88A-MMH
ATMEGA88A-MU
ATMEGA88PA-MU
ATMEGA88PA-AU
ATMEGA88A-AU
ATMEGA88PA-AUA6
ATMEGA88PA-PN
ATMEGA88PA-MMN
ATMEGA88PA-MN
ATMEGA88PA-AN
ATMEGA88PA-MMNR
ATMEGA88PA-MNR
ATMEGA88PA-ANR
ATMEGA88PA-MMUR
ATMEGA88PA-MMHR
ATMEGA88A-MMHR
ATMEGA88A-MUR
ATMEGA88PA-MUR
ATMEGA88PA-MURA6
ATMEGA88PA-AUR
ATMEGA88PA-AURA3
ATMEGA88A-AUR
ATMEGA88PA-15MZ
ATMEGA88PA-15MZV03
ATMEGA88PA-15MZV04
ATMEGA88PA-15MZV05
ATMEGA88PA-15MZV06
ATMEGA88PA-15MZV07
ATMEGA88PA-15AZ
ATMEGA88PA-15AZV01
ATMEGA88PA-15AZV02
ATMEGA168PA-15AZT
ATMEGA168PA-15AZTV02
ATMEGA168A-PU
ATMEGA168PA-PU
ATMEGA168PA-MMH
ATMEGA168A-MMH
ATMEGA168PA-MU

ATMEGA168A-MU
ATMEGA168PA-MUA2
ATMEGA168PA-AU
ATMEGA168A-AU
ATMEGA168PA-PN
ATMEGA168PA-MN
ATMEGA168PA-AN
ATMEGA168PA-MNR
ATMEGA168PA-ANR
ATMEGA168PA-MMHR
ATMEGA168A-MMHR
ATMEGA168PA-MUR
ATMEGA168A-MUR
ATMEGA168PA-MURA2
ATMEGA168PA-AUR
ATMEGA168A-AUR
ATMEGA168PA-15MZ
ATMEGA168PA-15MZV01
ATMEGA168PA-15MZV03
ATMEGA168PA-15MZV04
ATMEGA168PA-15AZ
ATMEGA328P-PU
ATMEGA328-PU
ATMEGA328P-MMH
ATMEGA328-MMH
ATMEGA328P-MU
ATMEGA328-MU
ATMEGA328P-MUA2
ATMEGA328-AU
ATMEGA328P-AU
ATMEGA328P-PN
ATMEGA328P-MN
ATMEGA328P-AN
ATMEGA328P-MNR
ATMEGA328P-ANR
ATMEGA328P-MMHR
ATMEGA328-MMHR
ATMEGA328P-MUR
ATMEGA328-MUR
ATMEGA328-AUR
ATMEGA328P-AUR
ATMEGA328P-AURA0
ATMEGA328P-15MZ
ATMEGA328P-15AZ
ATMEGA48A-PU
ATMEGA48PA-PU
ATMEGA48PA-MMH
ATMEGA48A-MMH
ATMEGA48A-MU

ATMEGA48PA-MU
ATMEGA48A-AU
ATMEGA48PA-AU
ATMEGA48PA-PN
ATMEGA48PA-MMN
ATMEGA48PA-MN
ATMEGA48PA-AN
ATMEGA48PA-MMNR
ATMEGA48PA-MNR
ATMEGA48PA-ANR
ATMEGA48PA-MMHR
ATMEGA48A-MMHR
ATMEGA48A-MUR
ATMEGA48PA-MUR
ATMEGA48A-AUR
ATMEGA48PA-AUR
ATMEGA48PA-AURB0



ATmega48A/PA/88A/PA/ 168A/PA/328/P

Silicon Errata and Data Sheet Clarifications

Introduction

The ATmega48A/PA/88A/PA/168A/PA/328/P devices you have received conform functionally to the current device data sheet (www.microchip.com/DS40002061), except for the anomalies described in this document. The erratas described in this document will likely be addressed in future revisions of the ATmega48A/PA/88A/PA/168A/PA/328/P devices.

Note:

- This document summarizes all the silicon errata issues from all revisions of silicon, previous as well as current.

1. Silicon Issue Summary

Legend

- Erratum is not applicable.
- X Erratum is applicable.

| Peripheral | Short Description | Valid for Silicon Revision | | | | | | | | |
|--------------------------------|-------------------------------------------------------------------------------|----------------------------|--------|--------------|--------|---------------|--------|-------------|--------|--------|
| | | ATmega48A/PA | | ATmega88A/PA | | ATmega168A/PA | | ATmega328/P | | |
| | | Rev. D (1) | Rev. E | Rev. F (1) | Rev. G | Rev. E (1) | Rev. L | Rev. A | Rev. B | Rev. D |
| System Clock and Clock Options | 2.2.1. Unstable 32 kHz Oscillator | - | - | - | - | - | - | X | X | - |
| TWI | 2.3.1. TWI Data Setup Time Can Be Too Short | X | X | X | X | X | X | - | - | X |
| Analog Comparator | 2.4.1. Analog MUX Can Be Turned Off When Setting the ACME Bit | X | X | X | X | X | X | X | X | X |

Note:

1. This revision is the initial release of the silicon.

The following silicon revisions were never released to production:

- ATmega168A/PA
 - Rev. F-K
- ATmega328/P
 - Rev. C

2. Silicon Errata Issues

2.1 Errata Details

- Erratum is not applicable.
- X Erratum is applicable.

2.2 System Clock and Clock Options

2.2.1 Unstable 32 kHz Oscillator

The 32 kHz oscillator does not work as a system clock and if it used as an asynchronous timer, it is inaccurate.

Work around

None.

Affected Silicon Revisions

| ATmega48A/PA | | |
|--------------|--------|--|
| Rev. D | Rev. E | |
| - | - | |

| ATmega88A/PA | |
|--------------|--------|
| Rev. F | Rev. G |
| - | - |

| ATmega168A/PA | |
|---------------|--------|
| Rev. E | Rev. L |
| - | - |

| ATmega328/P | | |
|-------------|--------|--------|
| Rev. A | Rev. B | Rev. D |
| X | X | - |

2.3 TWI - Two-Wire Interface

2.3.1 TWI Data Setup Time Can Be Too Short

When running the device as a TWI slave with a system clock above 2 MHz, the data setup time for the first bit after ACK may, in some cases, be too short. This may cause a false start or stop condition on the TWI line.

Work around

Insert a delay between setting TWDR and TWCR.

Affected Silicon Revisions

| ATmega48A/PA | | |
|--------------|--|--------|
| Rev. D | | Rev. E |
| X | | X |

| ATmega88A/PA | |
|--------------|--------|
| Rev. F | Rev. G |
| X | X |

| ATmega168A/PA | |
|---------------|--------|
| Rev. E | Rev. L |
| X | X |

| ATmega328/P | | |
|-------------|--------|--------|
| Rev. A | Rev. B | Rev. D |
| - | - | X |

2.4 AC - Analog Comparator

2.4.1 Analog MUX Can Be Turned Off When Setting the ACME Bit

If the ACME (Analog Comparator Multiplexer Enabled) bit in ADCSRB is set while MUX3 in ADMUX is '1' (ADMUX[3:0]=1xxx), all MUXs are turned off until the ACME bit is cleared.

Work around

Clear the MUX3 bit before setting the ACME bit.

Affected Silicon Revisions

| ATmega48A/PA | | |
|--------------|--|--------|
| Rev. D | | Rev. E |
| X | | X |

| ATmega88A/PA | |
|--------------|--------|
| Rev. F | Rev. G |
| X | X |

| ATmega168A/PA | |
|---------------|--------|
| Rev. E | Rev. L |
| X | X |

| ATmega328/P | | |
|-------------|--------|--------|
| Rev. A | Rev. B | Rev. D |
| X | X | X |

3. Data Sheet Clarifications

The following typographic corrections and clarifications are to be noted for the latest version of the device data sheet (www.microchip.com/DS40002061).

Note: Corrections are shown in **bold**. Where possible, the original bold text formatting has been removed for clarity.

3.1 Ordering Information

A clarification has been made to tables titled 'Package Type' for all devices documented in the data sheet:

- A note to the 32M1-A row was added informing that the package type can be delivered in two different styles

| Package Type | |
|-----------------------|-----------------------------------------------------------------------------------------|
| 32A | 32-lead, (1.0 mm) Plastic Thin Quad Flat Package (TQFP) |
| 28M1 | 28-pad, 4 x 4 x 1.0 body, Lead Pitch 0.45 mm Very Thin Plastic Quad Flat No-Lead (VQFN) |
| 32M1-A ⁽¹⁾ | 32-pad, 5 x 5 x 1.0 body, Lead Pitch 0.50 mm Thin Plastic Quad Flat No-Lead (VQFN) |
| 28P3 | 28-lead, 0.300" Wide, Skinny Plastic Dual Inline Package (SPDIP) |

1. **This package type can be delivered with two different styles with reference numbers 'C04-21400' (punched) and 'C04-21395' (sawn) as shown in section 3.2.1 - 32M1-A. For PCB layouts, it is recommended to take both *recommended land patterns* into consideration.**


3.2 Package Information

A clarification about the other package style available for package type 32M1-A has been added to the 32M1-A section.

3.2.1 32M1-A

32-Lead Thin Plastic Quad Flat, No Lead Package (S4B) - 5x5 mm Body [VQFN] Punch Singulated; 3.10x3.10 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

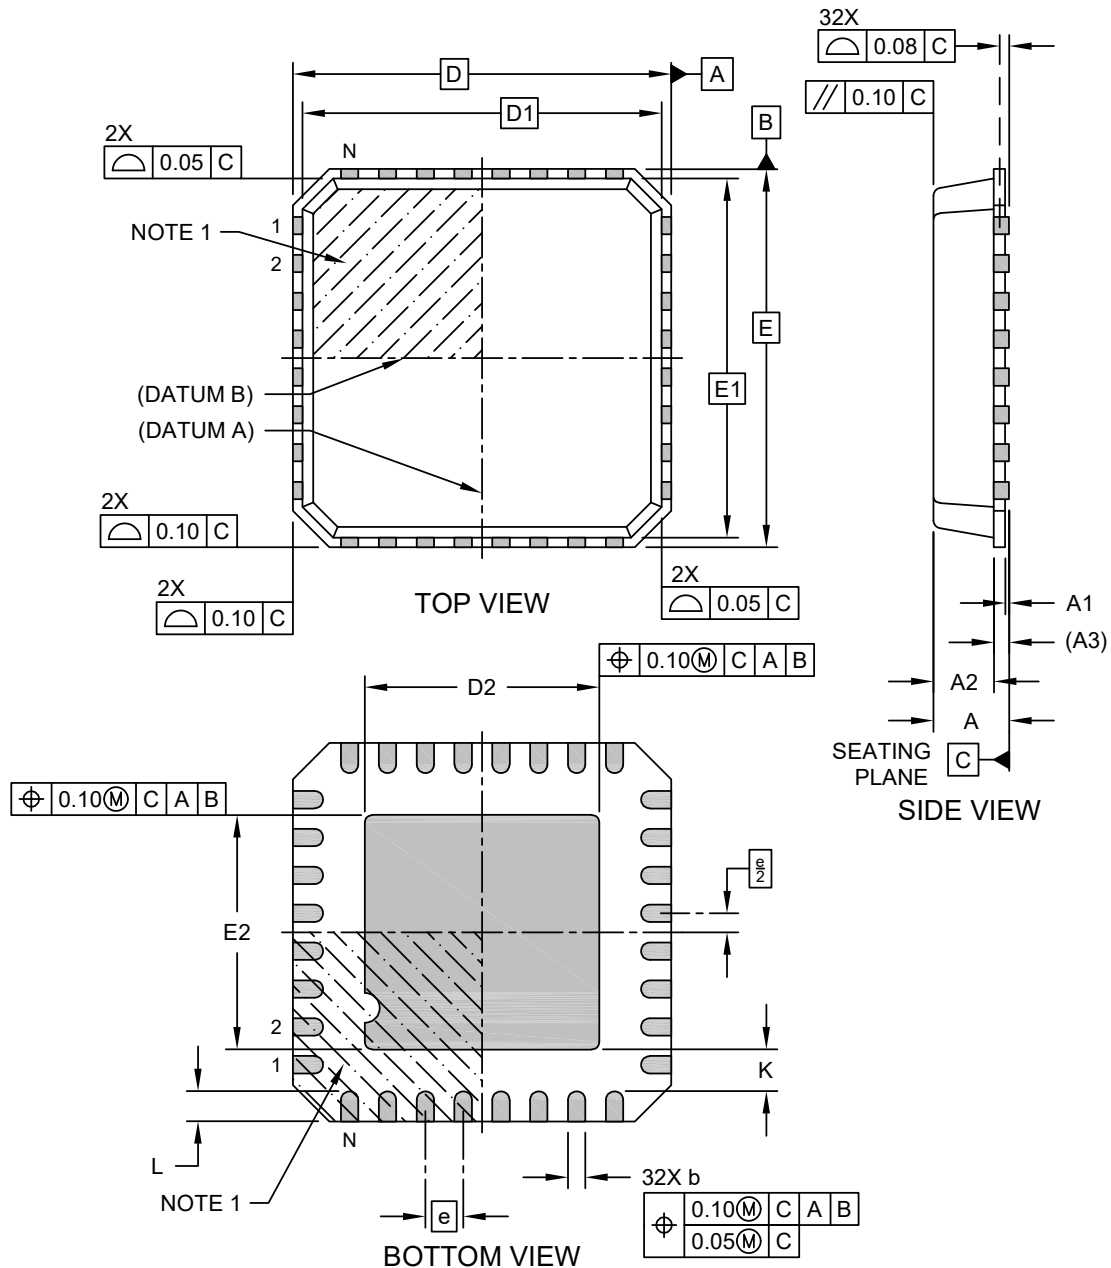


Microchip Technology Drawing C04-21400 Rev B Sheet 1 of 2

ATmega48A/PA/88A/PA/168A/PA/328/P

Data Sheet Clarifications

32-Lead Thin Plastic Quad Flat, No Lead Package (S4B) - 5x5 mm Body [VQFN] Punch Singulated; 3.10x3.10 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

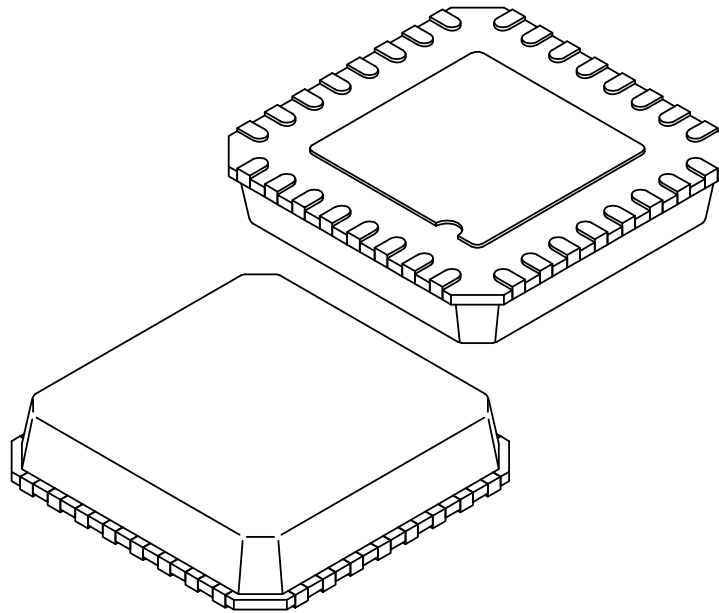

| | | Units | MILLIMETERS | | |
|-------------------------|----|-------|-------------|------|------|
| Dimension Limits | | | MIN | NOM | MAX |
| Number of Terminals | N | | 32 | | |
| Pitch | e | | 0.50 BSC | | |
| Overall Height | A | | 0.80 | 0.85 | 1.00 |
| Standoff | A1 | | 0.00 | 0.02 | 0.05 |
| Mold Cap Thickness | A2 | | - | 0.65 | 0.70 |
| Terminal Thickness | A3 | | 0.20 REF | | |
| Overall Length | D | | 5.00 BSC | | |
| Mold Cap Length | D1 | | 4.75 BSC | | |
| Exposed Pad Length | D2 | | 2.95 | 3.10 | 3.25 |
| Overall Width | E | | 5.00 BSC | | |
| Mold Cap Width | E1 | | 4.75 BSC | | |
| Exposed Pad Width | E2 | | 2.95 | 3.10 | 3.25 |
| Terminal Width | b | | 0.18 | 0.23 | 0.30 |
| Terminal Length | L | | 0.30 | 0.40 | 0.50 |
| Terminal-to-Exposed-Pad | K | | 0.20 | - | - |


Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is punch singulated
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-21400 Rev B Sheet 2 of 2

32-Lead Thin Plastic Quad Flat, No Lead Package (S4B) - 5x5 mm Body [VQFN] Punch Singulated; 3.10x3.10 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

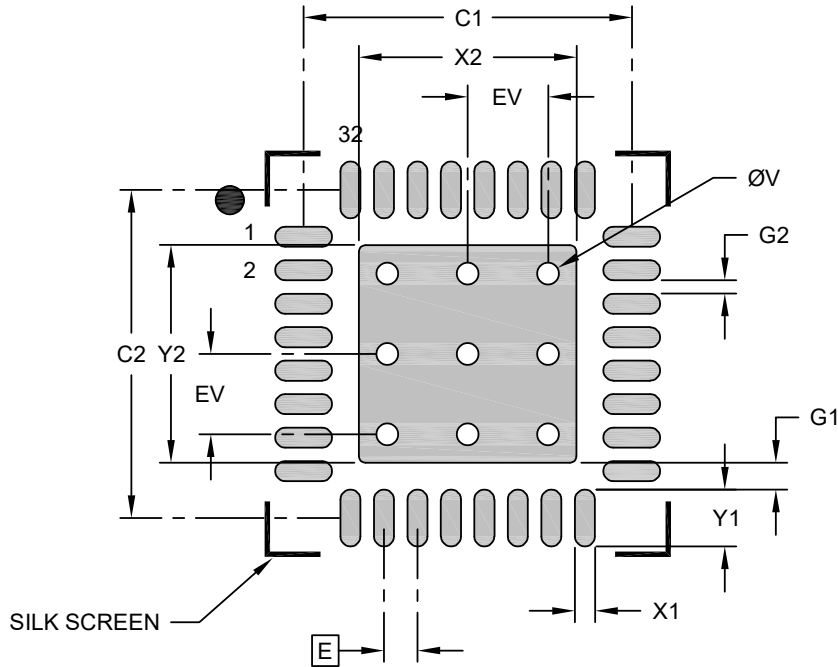

RECOMMENDED LAND PATTERN

| Dimension Limits | Units | MILLIMETERS | | |
|----------------------------------|-------|-------------|------|------|
| | | MIN | NOM | MAX |
| Contact Pitch | E | 0.50 BSC | | |
| Optional Center Pad Width | X2 | | | 3.25 |
| Optional Center Pad Length | Y2 | | | 3.25 |
| Contact Pad Spacing | C1 | | 4.90 | |
| Contact Pad Spacing | C2 | | 4.90 | |
| Contact Pad Width (X32) | X1 | | | 0.30 |
| Contact Pad Length (X32) | Y1 | | | 0.85 |
| Contact Pad to Center Pad (X32) | G1 | 0.40 | | |
| Contact Pad to Contact Pad (X28) | G2 | 0.20 | | |
| Thermal Via Diameter | V | | 0.33 | |
| Thermal Via Pitch | EV | | 1.20 | |

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process


Microchip Technology Drawing C04-23400 Rev B

ATmega48A/PA/88A/PA/168A/PA/328/P

Data Sheet Clarifications

32-Lead Very Thin Plastic Quad Flat, No Lead Package (UBB) - 5x5x0.9 mm Body [VQFN] With 3.1x3.1 mm Exposed Pad; Atmel Legacy Global Package Code ZMF

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

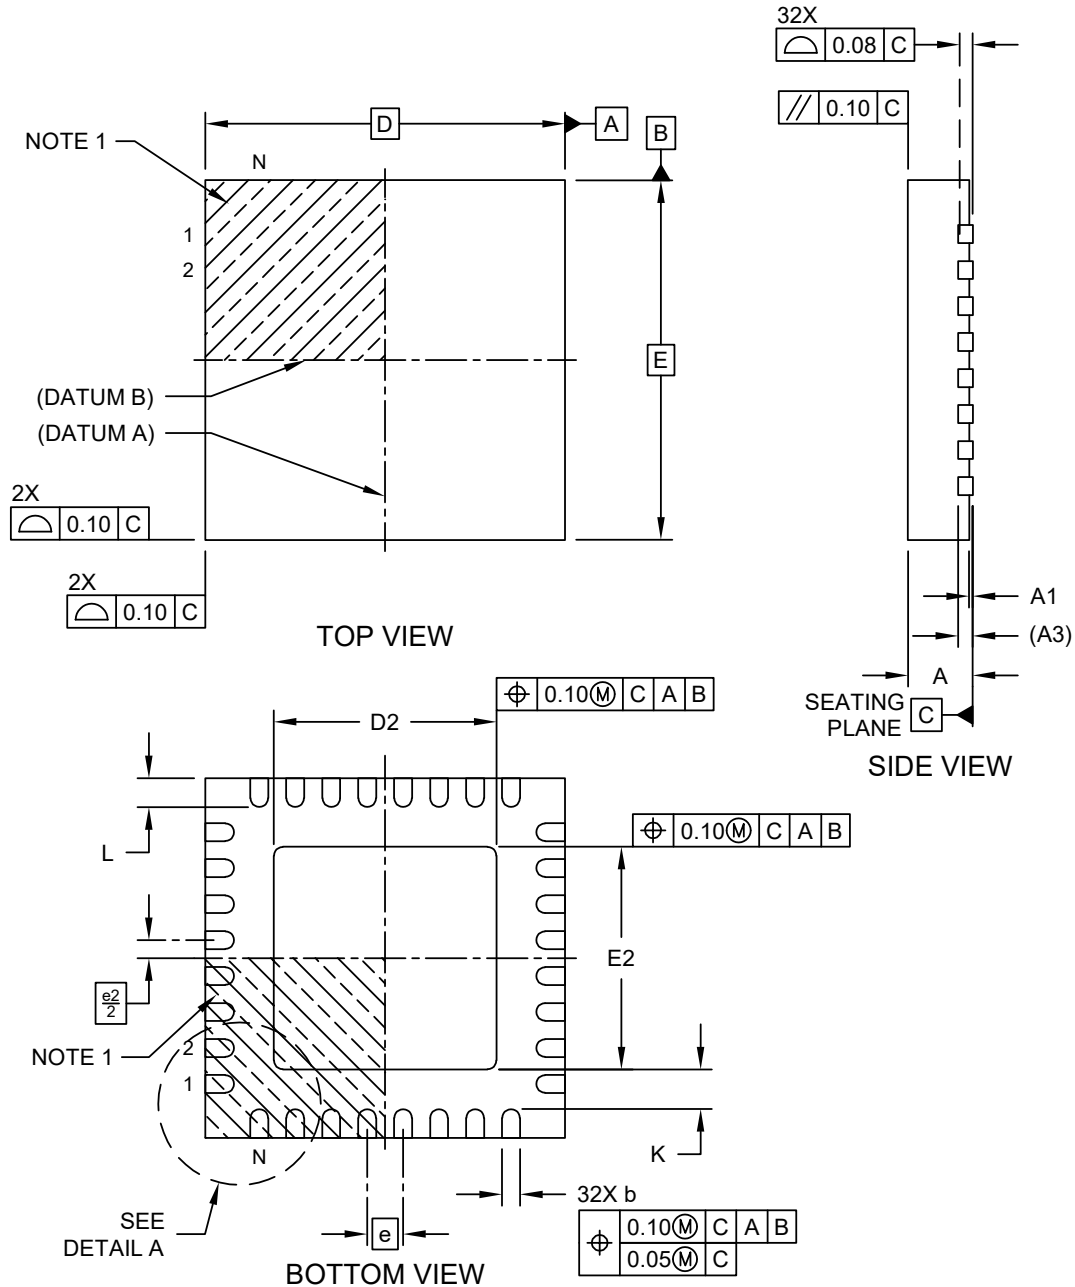


Microchip Technology Drawing C04-21395-UBB Rev C Sheet 1 of 2

ATmega48A/PA/88A/PA/168A/PA/328/P


Data Sheet Clarifications

32-Lead Very Thin Plastic Quad Flat, No Lead Package (UBB) - 5x5x0.9 mm Body [VQFN] With 3.1x3.1 mm Exposed Pad; Atmel Legacy Global Package Code ZMF

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>



DETAIL A
ALTERNATE TERMINAL
CONFIGURATIONS

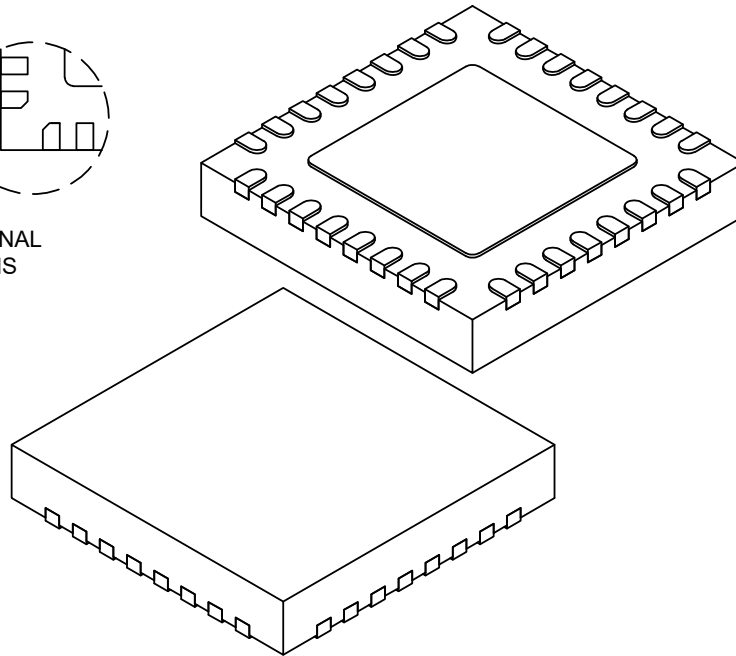

| Dimension Limits | Units | MILLIMETERS | | |
|-------------------------|-------|-------------|------|------|
| | | MIN | NOM | MAX |
| Number of Terminals | N | 32 | | |
| Pitch | e | 0.50 BSC | | |
| Overall Height | A | 0.80 | 0.85 | 0.90 |
| Standoff | A1 | 0.00 | 0.02 | 0.05 |
| Terminal Thickness | A3 | 0.203 REF | | |
| Overall Length | D | 5.00 BSC | | |
| Exposed Pad Length | D2 | 3.00 | 3.10 | 3.20 |
| Overall Width | E | 5.00 BSC | | |
| Exposed Pad Width | E2 | 3.00 | 3.10 | 3.20 |
| Terminal Width | b | 0.18 | 0.25 | 0.30 |
| Terminal Length | L | 0.30 | 0.40 | 0.50 |
| Terminal-to-Exposed-Pad | K | 0.20 | - | - |


Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-21395-UBB Rev C Sheet 2 of 2

32-Lead Very Thin Plastic Quad Flat, No Lead Package (UBB) - 5x5x0.9 mm Body [VQFN] With 3.1x3.1 mm Exposed Pad; Atmel Legacy Global Package Code ZMF

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

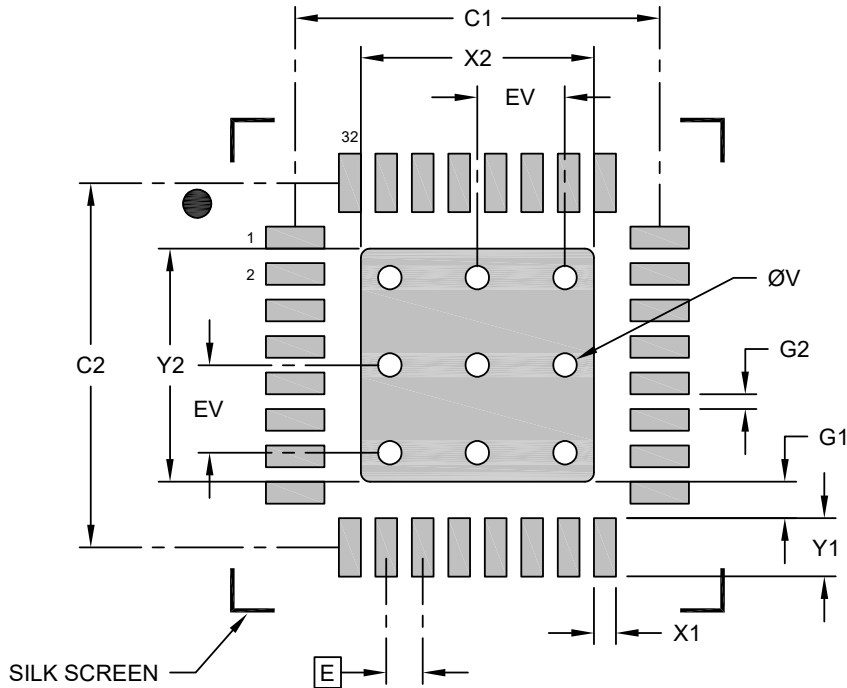

RECOMMENDED LAND PATTERN

| Dimension Limits | Units | MILLIMETERS | | |
|----------------------------------|-------|-------------|------|------|
| | | MIN | NOM | MAX |
| Contact Pitch | E | 0.50 BSC | | |
| Center Pad Width | X2 | | | 3.20 |
| Center Pad Length | Y2 | | | 3.20 |
| Contact Pad Spacing | C1 | | 5.00 | |
| Contact Pad Spacing | C2 | | 5.00 | |
| Contact Pad Width (X32) | X1 | | | 0.30 |
| Contact Pad Length (X32) | Y1 | | | 0.80 |
| Contact Pad to Center Pad (X32) | G1 | 0.20 | | |
| Contact Pad to Contact Pad (X28) | G2 | 0.20 | | |
| Thermal Via Diameter | V | | 0.33 | |
| Thermal Via Pitch | EV | | 1.20 | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23395-UBB Rev C

4. Document Revision History

Note: The data sheet clarification document revision is independent of the die revision and the device variant (last letter of the ordering number).

4.1 Revision History

| Doc Rev. | Date | Comments |
|----------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| B | 11/2021 | Added data sheet clarifications: <ul style="list-style-type: none">• Ordering Information• Package Information |
| A | 09/2020 | Initial document release. <ul style="list-style-type: none">• Content moved from the data sheet and restructured to the new document template• Updated the die revision list to reflect die revisions in production |

The Microchip Website

Microchip provides online support via our website at www.microchip.com/. This website is used to make files and information easily available to customers. Some of the content available includes:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip design partner program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

Product Change Notification Service

Microchip's product change notification service helps keep customers current on Microchip products. Subscribers will receive email notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, go to www.microchip.com/pcn and follow the registration instructions.

Customer Support

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Embedded Solutions Engineer (ESE)
- Technical Support

Customers should contact their distributor, representative or ESE for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in this document.

Technical support is available through the website at: www.microchip.com/support

Microchip Devices Code Protection Feature

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods being used in attempts to breach the code protection features of the Microchip devices. We believe that these methods require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Attempts to breach these code protection features, most likely, cannot be accomplished without violating Microchip's intellectual property rights.
- Microchip is willing to work with any customer who is concerned about the integrity of its code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable." Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Legal Notice

Information contained in this publication is provided for the sole purpose of designing with and using Microchip products. Information regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL LOSS, DAMAGE, COST OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Klear, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackeTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TempTrackr, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, Vite, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, INICnet, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQL, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2021, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-5224-8874-3

Quality Management System

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Worldwide Sales and Service

| AMERICAS | ASIA/PACIFIC | ASIA/PACIFIC | EUROPE |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Corporate Office 2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200 Tel: 480-792-7277 Technical Support: www.microchip.com/support Web Address: www.microchip.com</p> <p>Atlanta Duluth, GA Tel: 678-957-9614 Fax: 678-957-1455</p> <p>Austin, TX Tel: 512-257-3370</p> <p>Boston Westborough, MA Tel: 774-760-0087 Fax: 774-760-0088</p> <p>Chicago Itasca, IL Tel: 630-285-0071 Fax: 630-285-0075</p> <p>Dallas Addison, TX Tel: 972-818-7423 Fax: 972-818-2924</p> <p>Detroit Novi, MI Tel: 248-848-4000</p> <p>Houston, TX Tel: 281-894-5983</p> <p>Indianapolis Noblesville, IN Tel: 317-773-8323 Fax: 317-773-5453 Tel: 317-536-2380</p> <p>Los Angeles Mission Viejo, CA Tel: 949-462-9523 Fax: 949-462-9608 Tel: 951-273-7800</p> <p>Raleigh, NC Tel: 919-844-7510</p> <p>New York, NY Tel: 631-435-6000</p> <p>San Jose, CA Tel: 408-735-9110 Tel: 408-436-4270</p> <p>Canada - Toronto Tel: 905-695-1980 Fax: 905-695-2078</p> | <p>Australia - Sydney Tel: 61-2-9868-6733</p> <p>China - Beijing Tel: 86-10-8569-7000</p> <p>China - Chengdu Tel: 86-28-8665-5511</p> <p>China - Chongqing Tel: 86-23-8980-9588</p> <p>China - Dongguan Tel: 86-769-8702-9880</p> <p>China - Guangzhou Tel: 86-20-8755-8029</p> <p>China - Hangzhou Tel: 86-571-8792-8115</p> <p>China - Hong Kong SAR Tel: 852-2943-5100</p> <p>China - Nanjing Tel: 86-25-8473-2460</p> <p>China - Qingdao Tel: 86-532-8502-7355</p> <p>China - Shanghai Tel: 86-21-3326-8000</p> <p>China - Shenyang Tel: 86-24-2334-2829</p> <p>China - Shenzhen Tel: 86-755-8864-2200</p> <p>China - Suzhou Tel: 86-186-6233-1526</p> <p>China - Wuhan Tel: 86-27-5980-5300</p> <p>China - Xian Tel: 86-29-8833-7252</p> <p>China - Xiamen Tel: 86-592-2388138</p> <p>China - Zhuhai Tel: 86-756-3210040</p> | <p>India - Bangalore Tel: 91-80-3090-4444</p> <p>India - New Delhi Tel: 91-11-4160-8631</p> <p>India - Pune Tel: 91-20-4121-0141</p> <p>Japan - Osaka Tel: 81-6-6152-7160</p> <p>Japan - Tokyo Tel: 81-3-6880-3770</p> <p>Korea - Daegu Tel: 82-53-744-4301</p> <p>Korea - Seoul Tel: 82-2-554-7200</p> <p>Malaysia - Kuala Lumpur Tel: 60-3-7651-7906</p> <p>Malaysia - Penang Tel: 60-4-227-8870</p> <p>Philippines - Manila Tel: 63-2-634-9065</p> <p>Singapore Tel: 65-6334-8870</p> <p>Taiwan - Hsin Chu Tel: 886-3-577-8366</p> <p>Taiwan - Kaohsiung Tel: 886-7-213-7830</p> <p>Taiwan - Taipei Tel: 886-2-2508-8600</p> <p>Thailand - Bangkok Tel: 66-2-694-1351</p> <p>Vietnam - Ho Chi Minh Tel: 84-28-5448-2100</p> | <p>Austria - Wels Tel: 43-7242-2244-39 Fax: 43-7242-2244-393</p> <p>Denmark - Copenhagen Tel: 45-4485-5910 Fax: 45-4485-2829</p> <p>Finland - Espoo Tel: 358-9-4520-820</p> <p>France - Paris Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79</p> <p>Germany - Garching Tel: 49-8931-9700</p> <p>Germany - Haan Tel: 49-2129-3766400</p> <p>Germany - Heilbronn Tel: 49-7131-72400</p> <p>Germany - Karlsruhe Tel: 49-721-625370</p> <p>Germany - Munich Tel: 49-89-627-144-0 Fax: 49-89-627-144-44</p> <p>Germany - Rosenheim Tel: 49-8031-354-560</p> <p>Israel - Ra'anana Tel: 972-9-744-7705</p> <p>Italy - Milan Tel: 39-0331-742611 Fax: 39-0331-466781</p> <p>Italy - Padova Tel: 39-049-7625286</p> <p>Netherlands - Druenen Tel: 31-416-690399 Fax: 31-416-690340</p> <p>Norway - Trondheim Tel: 47-72884388</p> <p>Poland - Warsaw Tel: 48-22-3325737</p> <p>Romania - Bucharest Tel: 40-21-407-87-50</p> <p>Spain - Madrid Tel: 34-91-708-08-90 Fax: 34-91-708-08-91</p> <p>Sweden - Gothenberg Tel: 46-31-704-60-40</p> <p>Sweden - Stockholm Tel: 46-8-5090-4654</p> <p>UK - Wokingham Tel: 44-118-921-5800 Fax: 44-118-921-5820</p> |