375324B00035G

Pin Fin heat sink with tape attachment
RoHS: compliant
Download PCN



Qty in stock: 0

Enter QTY:

Email estore@aavid.com for availability

Features

- Tape mounting saves board space by eliminating mounting holes
- Convenient peel and stick assembly is quick and clean
- Pin Fin array allows omni-directional airflow to maximize heat dissipation

This part comes with T411 Chomerics Tape for Plastic surfaces
Thermal Resistance: 1.00
Adhesive: Silicone
Color: Clear/Silver
Carrier: Aluminum
Meets Aavid RoHS 9000

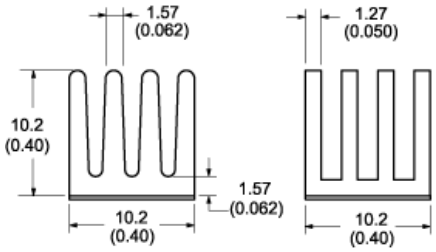

Width: 10.20
Length: 10.20
Height: 10.20
Base Thickness: 1.57
Fin Thickness: Length 1.27, Width 1.57
# of Fins: Length 4, Width 4
Fin Tip to Tip: 0.00
Finish: Black Anodize

Thermal Performance

Natural Convection: 71.40
(based on a heatsink temperature rise of 75°C above ambient)
Forced convection: 21.20

Need assistance?
Call us: 1-855-32-AAVID
Email: estore@aavid.com

» Help Page

Request a Sample ▸

Request a Quote ▸

Ask an Engineer ▸

» Product Return Policy
» Terms & Conditions
» Privacy Policy

based on fully ducted airflow entering at 1.0 m/s (197 LFM).

Thermal Curve:

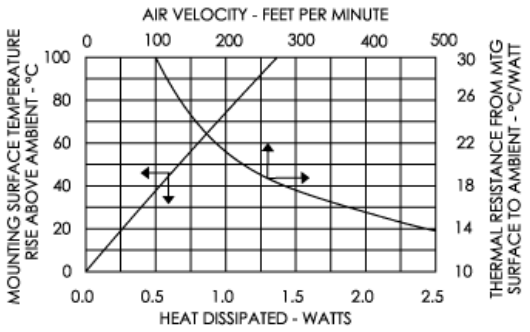

Customer Assistance
Contact Us
Get Design assistance
Find a Distributor
Find a Sales Rep
Request a Quote
Placing an Order
Terms and Conditions
Returns

Popular Products
Extrusions
Board Level
Liquid Cooling
Heat Pipe Technology
Heat Sink Accessories
Interface Materials

Our Company
About Aavid
News and Events
Management Team
Worldwide Locations
Directions to Headquarters
Disclaimer
Customer Survey
Privacy Policy

Sign up to receive Aavid news & alerts
email address
go

Aavid will lead the electronics thermal management industry worldwide. We will be the first company customers call to enable their thermal designs anywhere in the world. We will respond with extraordinary speed and will provide them with timely and cost-effective solutions because we understand their needs, their industry, and their culture. 2012 Aavid Thermalloy, LLC