

1W isolated DC-DC converter  
Fixed input voltage, unregulated single output



### FEATURES

- Continuous short-circuit protection
- Operating ambient temperature range: -40°C to +105°C
- I/O isolation test voltage 1.5k VDC
- High efficiency up to 85%
- Industry standard pin-out

Patent Protection **RoHS**



Continuous Short Circuit Protection



B05\_D-1WR3 series are designed for use in distributed power supply systems and especially suitable in applications such as pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits.

### Selection Guide

Certification	Part No.	Input Voltage (VDC)	Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load(μF) Max.
		Nominal (Range)	Voltage (VDC)	Current(mA) Max./Min.		
--	B0503D-1WR3	5 (4.5-5.5)	3.3	303/30	70/74	2400
	B0505D-1WR3		5	200/20	78/82	2400
	B0507D-1WR3		7.2	139/13	76/80	1000
	B0509D-1WR3		9	111/12	79/83	1000
	B0512D-1WR3		12	84/9	79/83	560
	B0515D-1WR3		15	67/7	79/83	560
	B0524D-1WR3		24	42/4	81/85	220

### Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	3.3VDC/5VDC output	--	270/5	286/--	mA
	7.2VDC/9VDC/12VDC output	--	241/12	254/--	
	15VDC/24VDC output	--	241/18	254/--	
Reflected Ripple Current*		--	15	--	
Surge Voltage (1sec. max.)	5VDC input	-0.7	--	9	VDC
Input Filter		Capacitance filter			
Hot Plug		Unavailable			

Note: \* Please refer to DC-DC Converter Application Note for detailed description of reflected ripple current testing method.

### Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Voltage Accuracy		See output regulation curve (Fig. 1)				
Linear Regulation	Input voltage change: ±1%	3.3VDC output	--	--	1.5	--
		other output	--	--	1.2	
Load Regulation	10%-100% load	3.3VDC output	--	15	20	%
		5VDC/7.2VDC output	--	10	15	
		9VDC output	--	8	10	
		12VDC output	--	7	10	
		15VDC output	--	6	10	
		24VDC output	--	5	10	

Ripple & Noise*	20MHz bandwidth	24VDC output	--	50	100	mVp-p
		other output	--	30	75	
Temperature Coefficient	100% load		--	±0.02	--	%/°C
Short-circuit Protection		Continuous, self-recovery				

Note: \* The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

### General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Isolation Voltage	Input-output Electric strength test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC	
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ	
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	20	--	pF	
Operating Temperature	Derating when operating temperature ≥ 85°C, (see Fig. 2)	-40	--	105	°C	
Storage Temperature		-55	--	125		
Case Temperature Rise	Ta=25°C	3.3VDC output	--	25		--
		other output	--	15		--
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	300		
Storage Humidity	Non-condensing	5	--	95	%RH	
Vibration		10-150Hz, 5G, 0.75mm, along X, Y and Z				
Switching Frequency	100% load, nominal input voltage	--	300	--	kHz	
MTBF	MIL-HDBK-217F@25°C	3500	--	--	k hours	

### Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94V-0)
Dimensions	12.70 x 10.16 x 8.20 mm
Weight	1.8g(Typ.)
Cooling Method	Free air convection

### Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit)		
	RE	CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit)		
Immunity	ESD	IEC/EN61000-4-2 Air ±8kV , Contact ±6kV		perf. Criteria B

### Typical Characteristic Curves

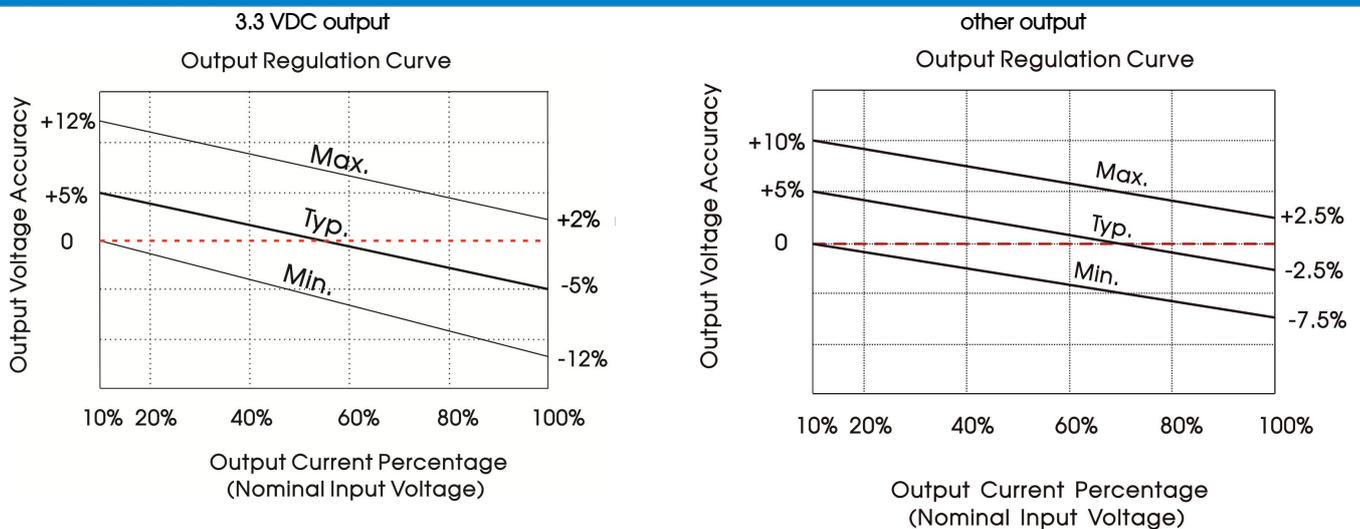


Fig. 1



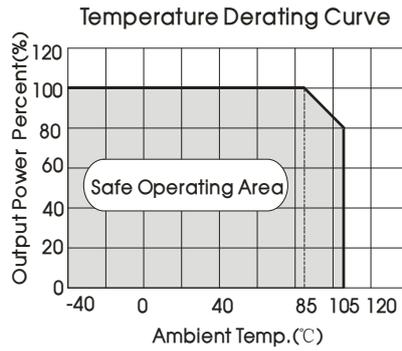


Fig. 2

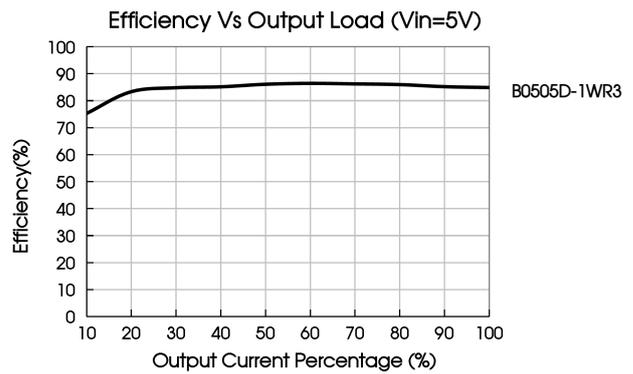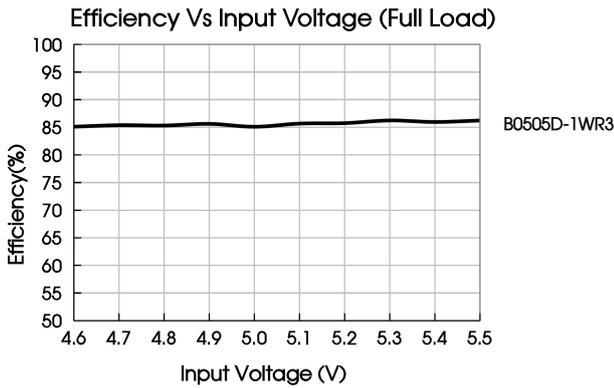

## Design Reference

### 1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

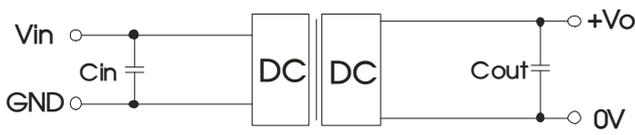


Table 1: Recommended input and output capacitor values

Vin	Cin	Vo	Cout
5VDC	4.7μF/16V	3.3/5/7.2VDC	10μF/16V
		9/12VDC	2.2μF/25V
		15/24VDC	1μF/50V

### 2. EMC compliance circuit

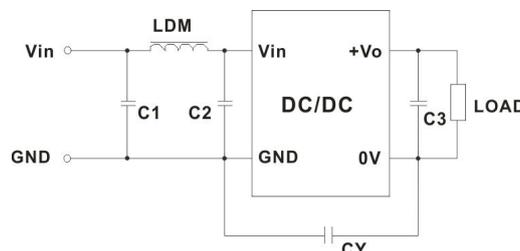



Table 2: Recommended EMC filter values

Input voltage 5VDC	Output voltage		3.3/5/7.2/9VDC	12/15/24VDC
	Emissions	C1/C2	4.7μF /25V	4.7μF /25V
CY		100pF /2kVDC	1nF /2kVDC	1nF /2kVDC
C3		Refer to the Cout in table 1		
LDM		6.8μH	6.8μH	6.8μH

Note: In the case of actual use, the requirements for emissions are high, it is subject to CY .

3. For additional information, please refer to DC-DC converter application notes on [www.mornsun-power.com](http://www.mornsun-power.com)

## Dimensions and Recommended Layout

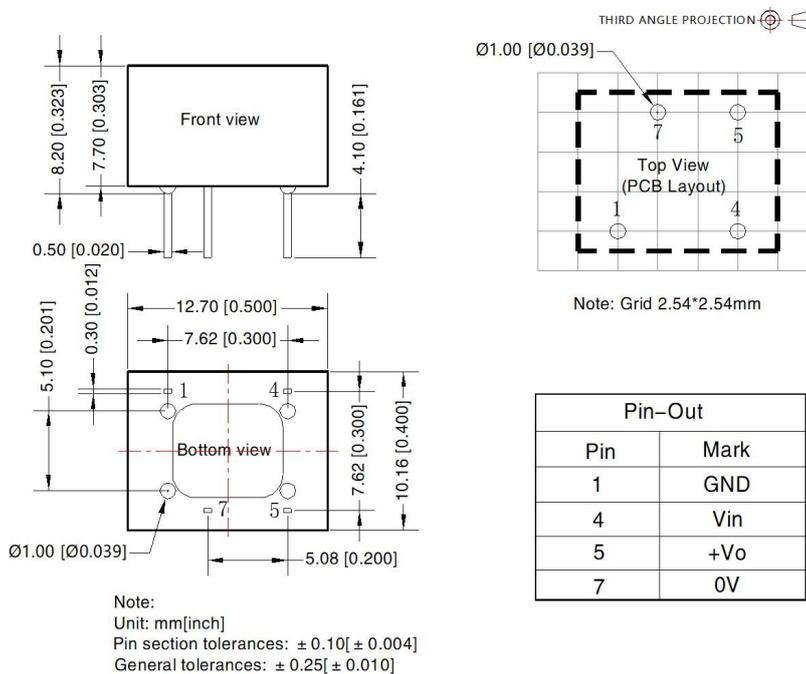

### Notes:

- For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58200011;
- If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- The maximum capacitive load offered were tested at input voltage range and full load;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

## MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: [info@mornsun.cn](mailto:info@mornsun.cn) [www.mornsun-power.com](http://www.mornsun-power.com)