

RF Filter for Pager Applications

- · High Rejection Out of Band
- Complies with Directive 2002/95/EC (RoHS)




Absolute Maximum Ratings

Rating	Value	Units	
Maximum Incident Power in Passband	0	dBm	
Maximum DC Voltage Between Any Two Terminals	30	VDC	
Storage Temperature Range in Tape and Reel	-40 to +85	°C	
Suitable for Lead-free Soldering - Maximum Soldering Profile	260 °C for 30 s		

930.5 MHz **SAW Filter**

SF2008D



Electrical Characteristics

Characteristic	Sym	Notes	Min	Тур	Max	Units
Center Frequency		1		930.5		MHz
Passband Insertion Loss, 928.5 to 932.5 MHz					4.5	dB
Passband Amplitude Ripple, 928.5 to 932.5 MHz		1, 2			2.0	dB _{P-P}
Rejection Referenced to IL _{MAX}						
400 to 880 MHz			35			
884.8 to 890.2 MHz			40			dB
906.8 to 911.2 MHz		1, 2, 3				
980 to 1300 MHz			35			1
Operating Temperature Range	T _A	1	-20		+70	°C
Input Impedance at f _C		50 - j57 ohm				
Output Impedance at f _C		50 - j57 ohm				
Case Style		SM3838-6 3.8 x 3.8 mm Nominal Footprint				
Lid Symbolization (Y=year, WW=week, S=shift) dot=pin 1 indicator	455, YWWS					
Standard Reel Quantity Reel Size 7 Inch	1000 Pieces/Reel					
Reel Size 13 Inch	3000 Pieces/Reel					

Electrical Connections

Connection	Terminals
Port 1	2
Port 2	5
Case Ground	All others

CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.


NOTES:

- Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analysis. 1. lvzer.
- Unless noted otherwise, all frequency specifications are referenced to the 2. nominal center frequency, fc.
- 3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
- 4 "LRIP" or "L" after the part number indicates "low rate initial production"

- 5.
- The design, manufacturing process, and specifications of this filter are subject to change. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 6. and Port 2, so that the filter must always be installed in one direction per the circuit design.
- 7
- US and international patents may apply. Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd. 8.

and "ENG" or "E" indicates "engineering prototypes."

Matching Circuit

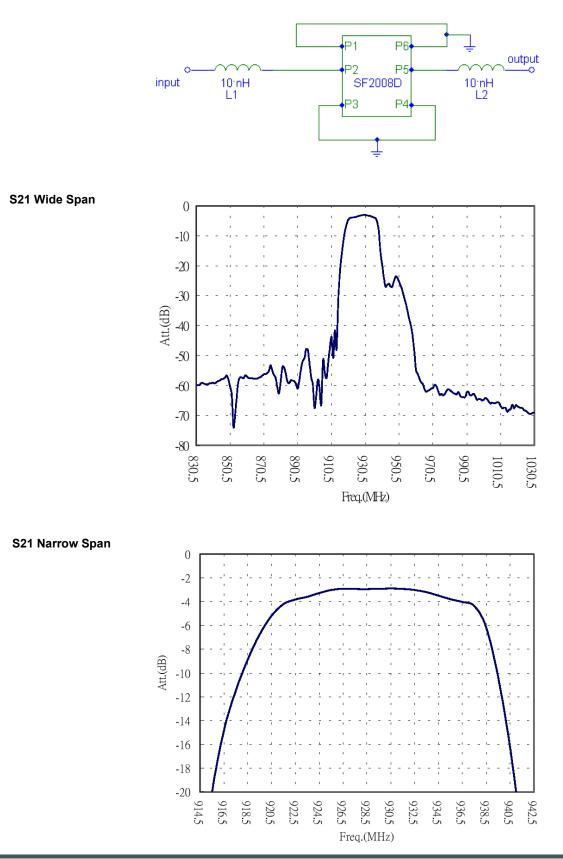


SM3838-6 Case

6-Terminal Ceramic Surface-Mount Case 3.8 X 3.8 mm Nominal Footprint

С

← D →




Case Dimensions						
Dimension	mm			Inches		
Dimension	Min	Nom	Max	Min	Nom	Max
Α	3.60	3.80	4.0	0.14	0.15	0.16
В	3.60	3.80	4.0	0.14	0.15	0.16
С	1.30	1.50	1.70	0.05	0.06	0.067
D	0.95	1.10	1.25	0.037	0.043	0.05
E	2.39	2.54	2.69	0.090	0.10	0.110
G	0.90	1.0	1.10	0.035	0.04	0.043
Н	1.90	2.0	2.10	0.75	0.08	0.83
I	0.50	0.6	0.70	0.020	0.024	0.028
J	1.70	1.8	1.90	0.067	0.07	0.075


Electrical Connections				
	Connection	Terminals		
Port 1	Single-ended Input	2		
Port 2	Single-ended Output	5		
	Ground	All others		
Single-er	nded Operation Only	•		
Dot indica	ates Pin 1			

Materials				
Solder Pad Plating	0.3 to 1.0 µm Gold over 1.27 to 8.89 µm Nickel			
Lid Plating	2.0 to 3.0 µm Nickel			
Body	Al ₂ O ₃ Ceramic			
Pb Free				


PCB Footprint












Tape and Reel Specifications

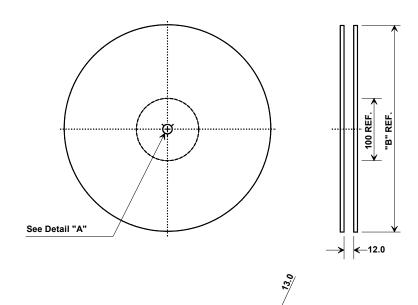

"B " Nominal Size		Quantity Per Reel
Inches	millimeters	
7	178	1000
13	330	3000

COMPONENT ORIENTATION and DIMENSIONS

2.0

Carrier Tape Dimensions				
Ao	4.25 mm			
Во	4.25 mm			
Ко	1.30 mm			
Pitch	8.0 mm			
W	12.0 mm			

