

IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL



ABM8W SERIES

3.2 x 2.5 x 0.75mm



RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

FEATURES

- Optimized for energy saving wearables, and IoT applications
- Low 50 Ω ESR at 30.000 to 54.000MHz
- 0.75 mm max height ideally suited for height constrained designs
- Seam sealed for longterm reliability


APPLICATIONS

- Wearables
- Internet of Things (IoT)
- Bluetooth/Bluetooth Low Energy (BLE)
- Wireless modules
- Machine-to-machine (M2M) connectivity
- Ultra-low power MCU
- Near Field Communication (NFC)
- ISM Band

STANDARD SPECIFICATIONS

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	10.000		54.000	MHz	
Operation Mode	Fundamental				
Operating Temperature Range	-40		+125	$^{\circ}\text{C}$	See options
Storage Temperature	-55		+125	$^{\circ}\text{C}$	
Frequency Tolerance @ +25 $^{\circ}\text{C}$	-10		+10	ppm	See options
Frequency Stability over the Operating Temperature (ref. to +25 $^{\circ}\text{C}$)	-10		+10	ppm	See options
Equivalent series resistance (R1)			150	Ω	10.000 - 11.999MHz
			100		12.000 – 29.999MHz
			50		30.000 – 54.000MHz
Shunt capacitance (C0)		< 1.2	2.0	pF	
Load capacitance (CL)		4.0		pF	See options
Drive Level		10	100	μW	
Aging (1 year)	-2		+2	ppm	@ 25 $^{\circ}\text{C}\pm 3^{\circ}\text{C}$
Insulation Resistance	500			M Ω	@ 100Vdc \pm 15V

IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

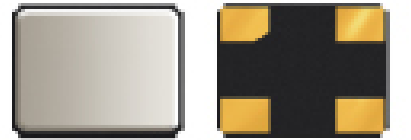

3.2 x 2.5 x 0.75mm




RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

ABM8W SERIES

OPTIONS AND PART IDENTIFICATION

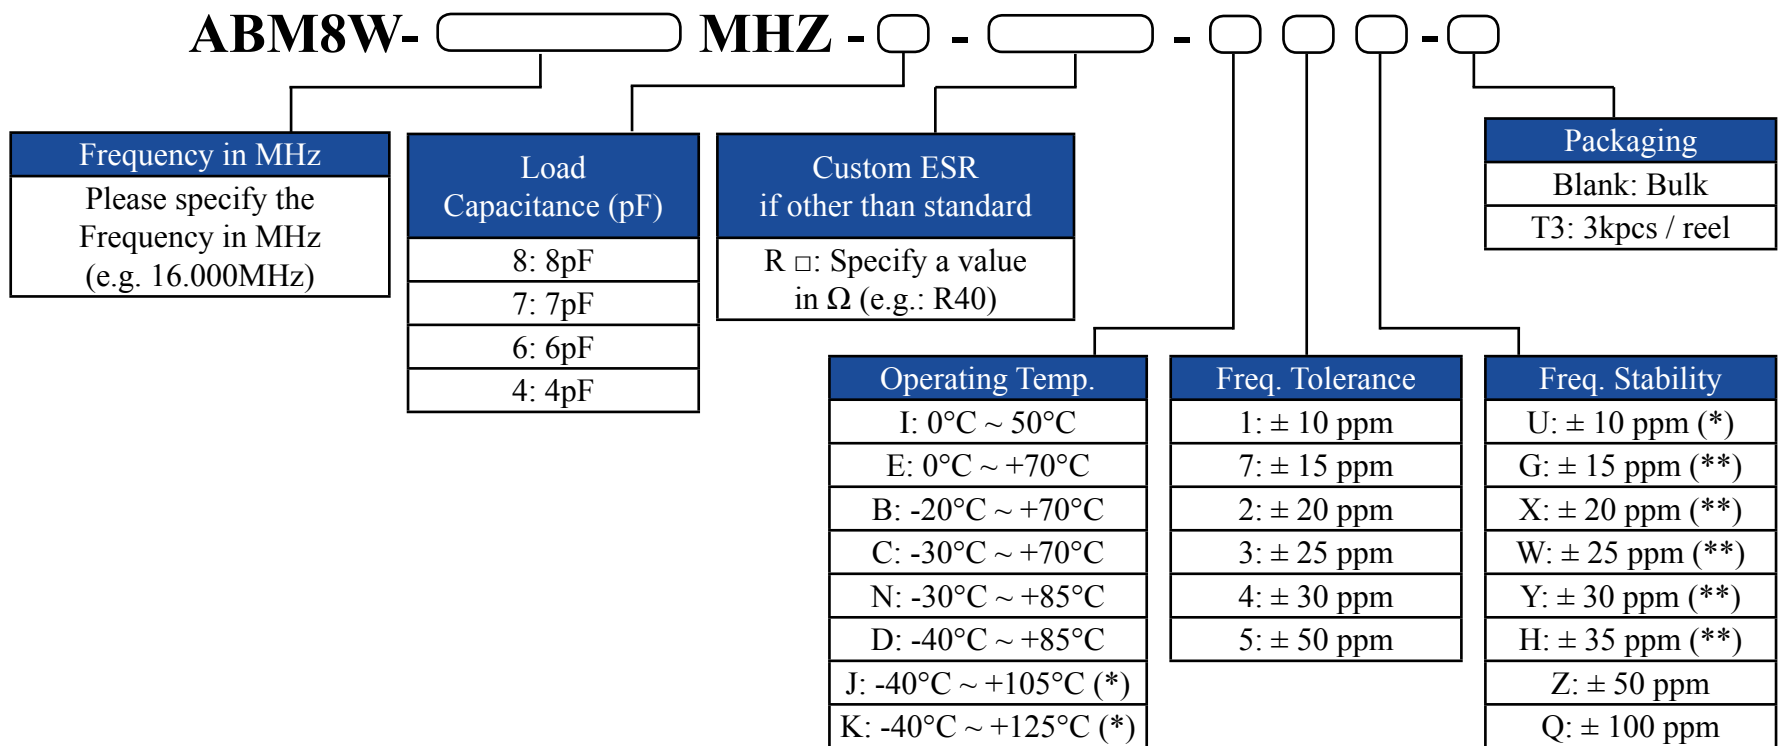

(*) Only offered @ Freq. Stability options: Z & Q.


Contact ABRACON for tighter Frequency Stability.

(*) Only offered @ Operating Temp. Range options: I, E, & B

(**) Only offered @ Operating Temp. Range options: I, E, B, C, N, & D

Contact ABRACON for wider Operating Temp. Range.

IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

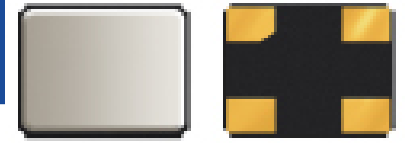



ABM8W SERIES

3.2 x 2.5 x 0.75mm



RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE


TYPICAL ESR (EQUIVALENT SERIES RESISTANCE) Vs. TEMPERATURE CHARACTERISTICS

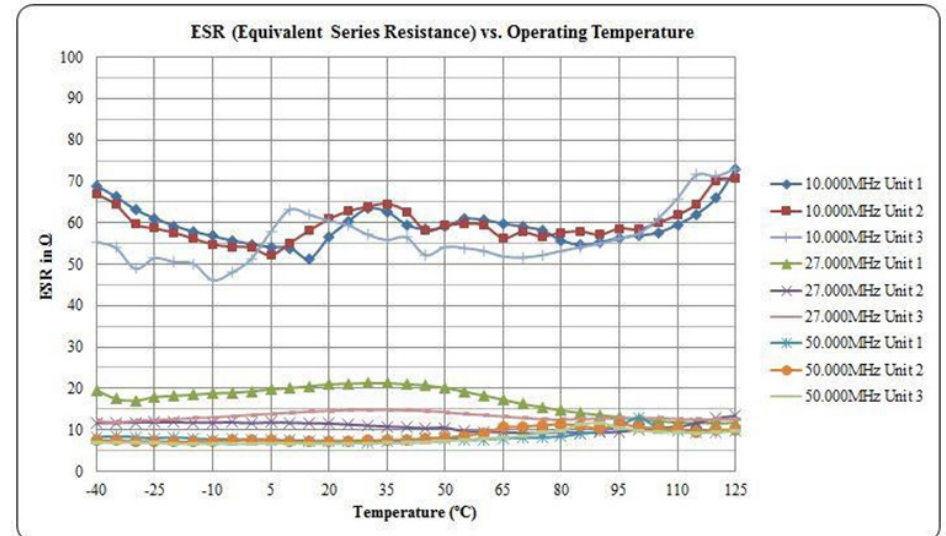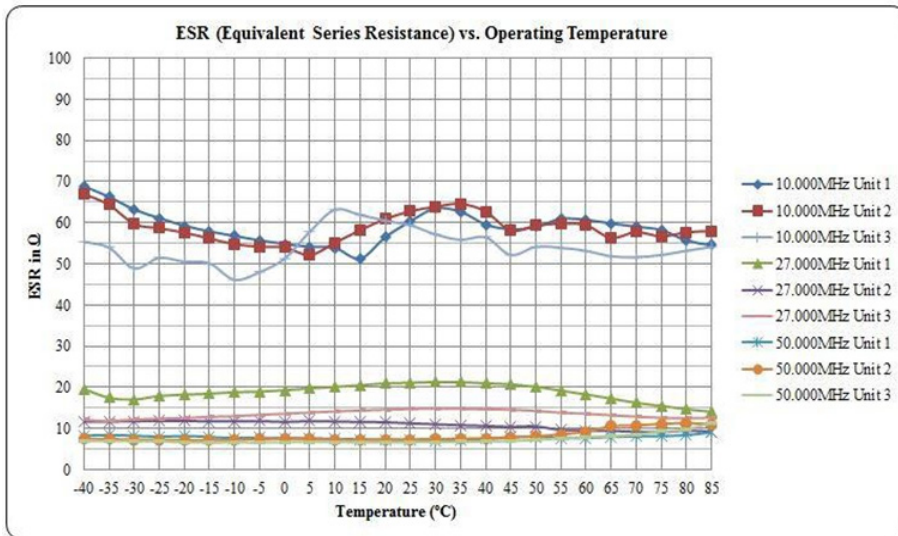

TYPICAL FREQUENCY Vs. TEMPERATURE CHARACTERISTICS

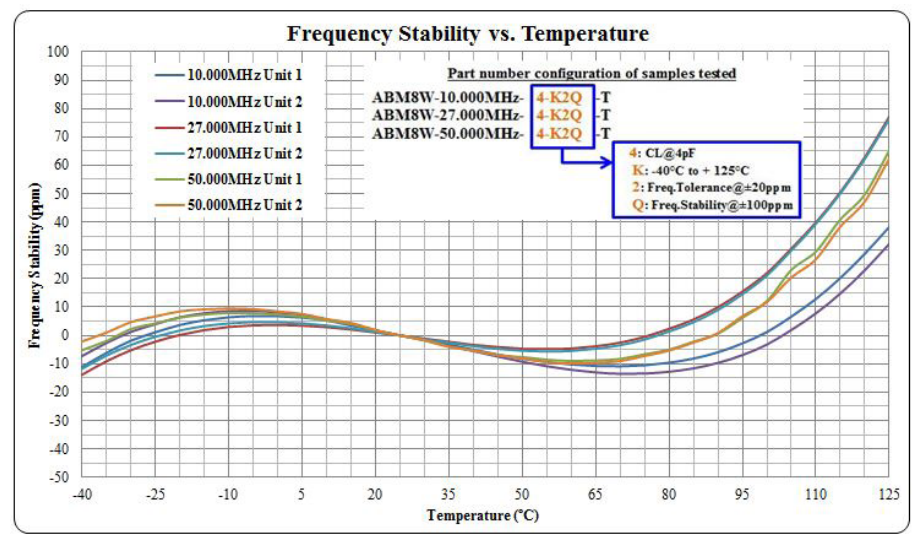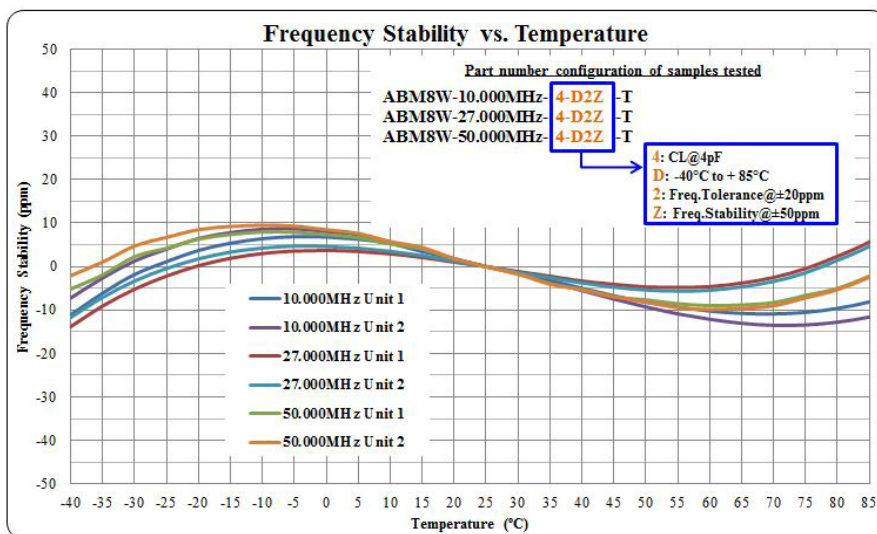

IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

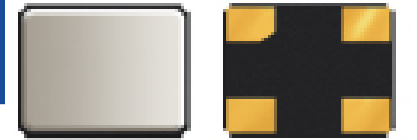

ABM8W SERIES


3.2 x 2.5 x 0.75mm






RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE


TYPICAL FREQUENCY TOLERANCE DISTRIBUTION (AT 25°C ± 3°C)

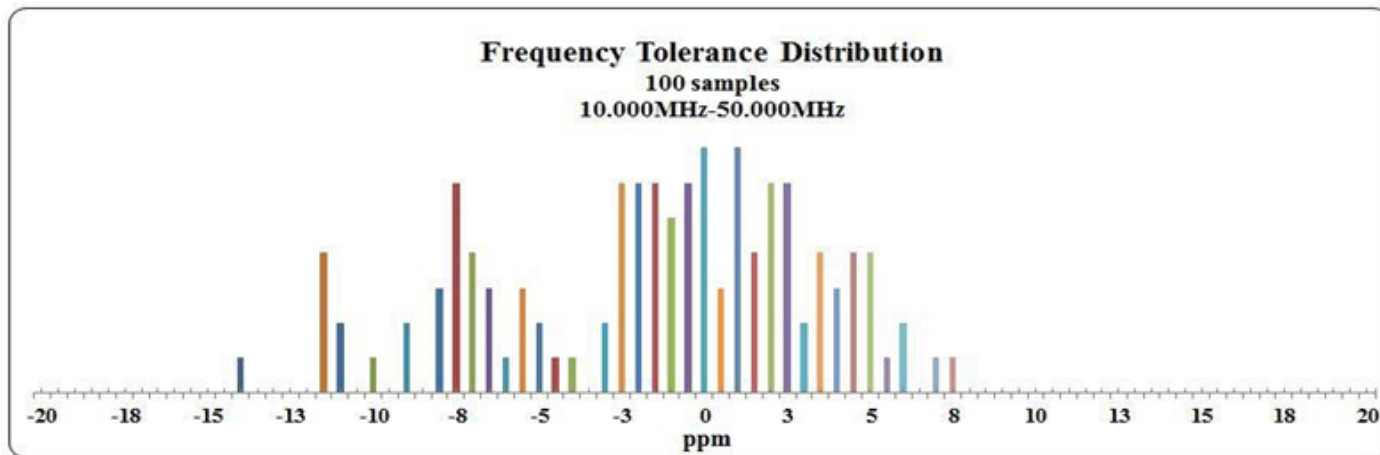

TYPICAL ESR DISTRIBUTION (AT 25°C ± 3°C)

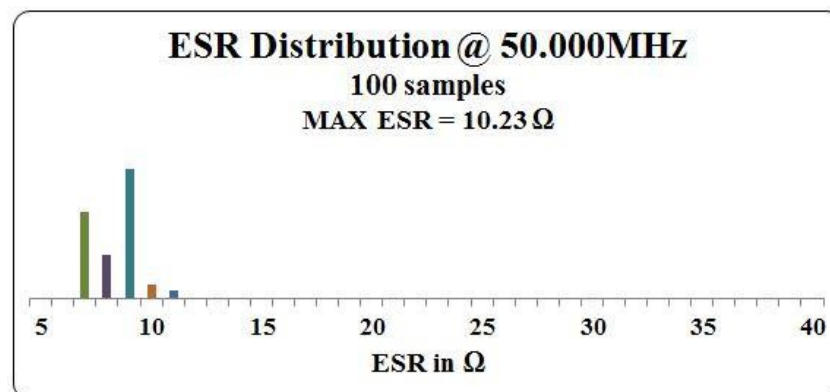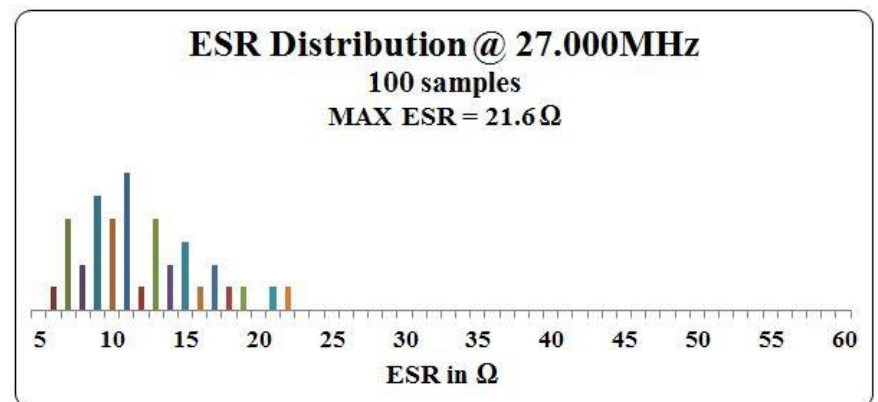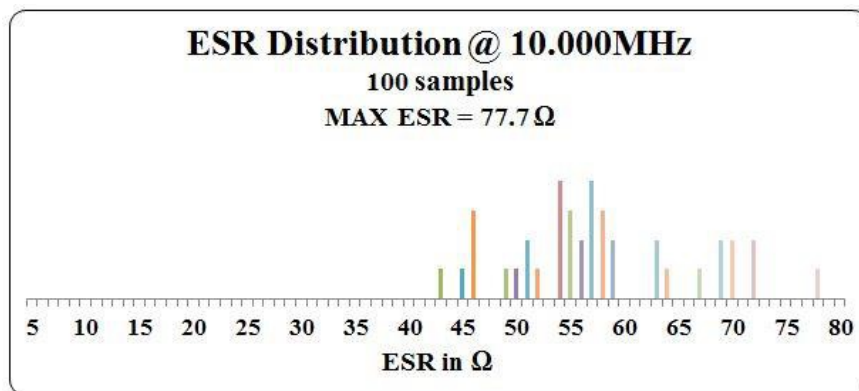

IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

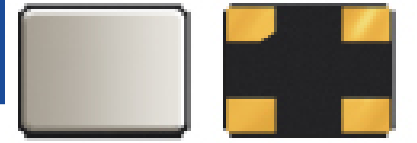

ABM8W SERIES


3.2 x 2.5 x 0.75mm



RoHS/RoHS II Compliant


MSL = N/A: NOT APPLICABLE

SPICE MODELS (BASED ON TYPICAL VALUES AT 25°C ± 3°C)

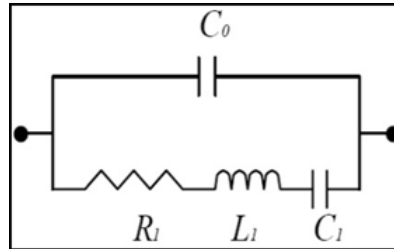

Frequency: 10.000MHz Plating Load: 4pF		Frequency: 10.000MHz Plating Load: 6pF	
C0	= 0.88 pF	C0	= 0.86 pF
R1	= 53.82 Ω	R1	= 60.62 Ω
L1	= 162.02 mH	L1	= 164.96 mH
C1	= 1.56 fF	C1	= 1.54 fF
Frequency: 27.000MHz Plating Load: 4pF		Frequency: 27.000MHz Plating Load: 6pF	
C0	= 1.16 pF	C0	= 1.16 pF
R1	= 11.83 Ω	R1	= 11.06 Ω
L1	= 9.16 mH	L1	= 9.10 mH
C1	= 3.80 fF	C1	= 3.82 fF
Frequency: 50.000MHz Plating Load: 4pF		Frequency: 50.000MHz Plating Load: 6pF	
C0	= 1.16 pF	C0	= 1.15 pF
R1	= 7.61 Ω	R1	= 8.06 Ω
L1	= 2.45 mH	L1	= 2.49 mH
C1	= 4.14 fF	C1	= 4.07 fF


MECHANICAL DIMENSIONS

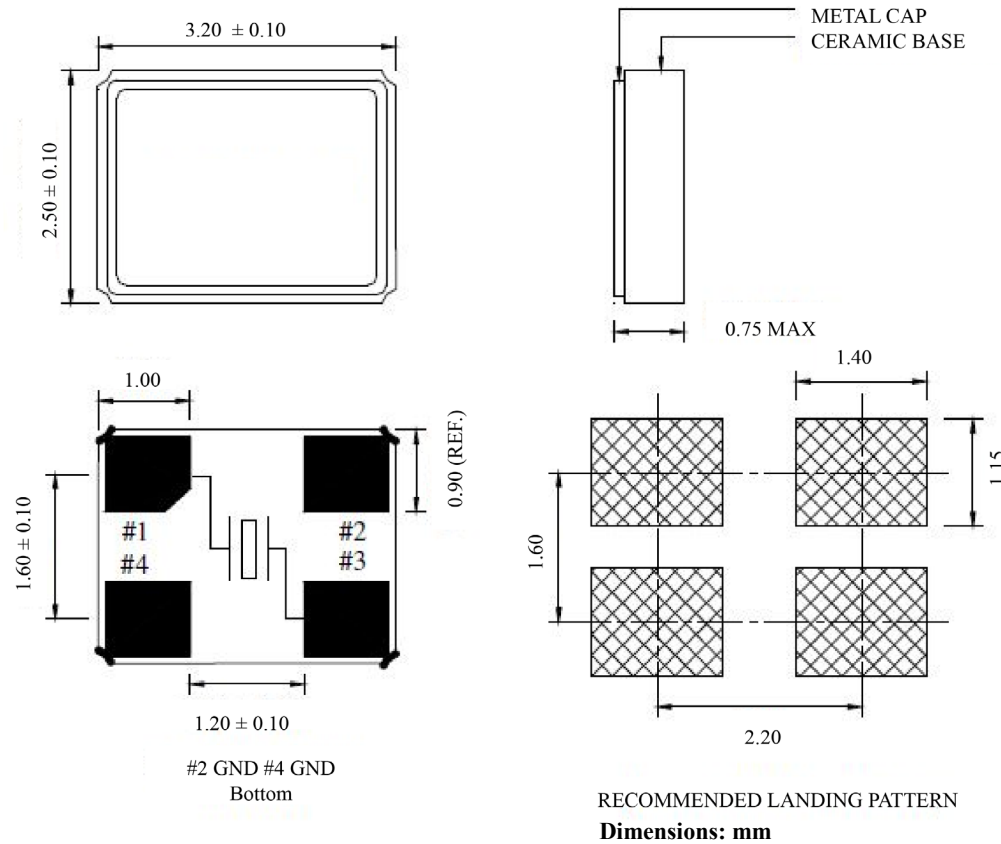

Note:

Due to material availability the Chamfer could be located on pin #1, 2 or 4. Be advised that the Chamfer location has no impact on the electrical performance of the device.

IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

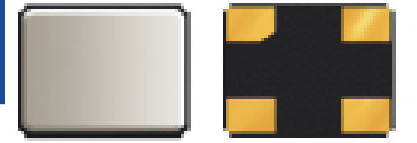

3.2 x 2.5 x 0.75mm




RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

ABM8W SERIES


REFLOW PROFILE

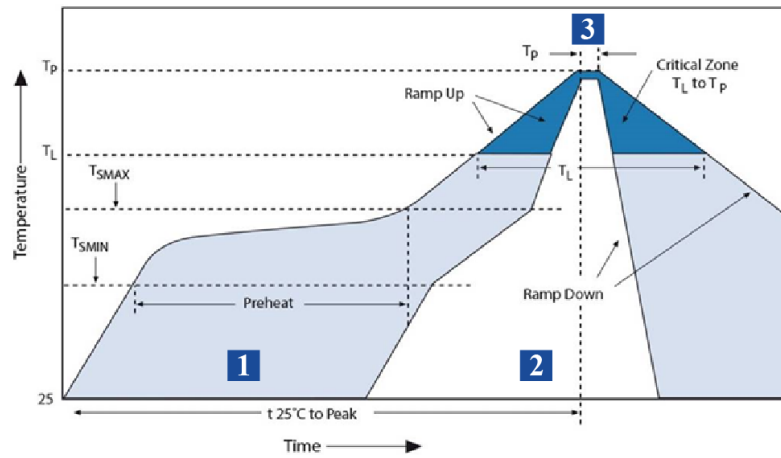

Zone	Description	Temperature	Time
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ 150°C ~ 180°C	60 ~ 120 sec.
2	Reflow	T_L 217°C	45 ~ 90 sec.
3	Peak Heat	T_P 260°C MAX	10 sec.

PACKAGING

T3: Tape and reel (3,000 pcs/reel)

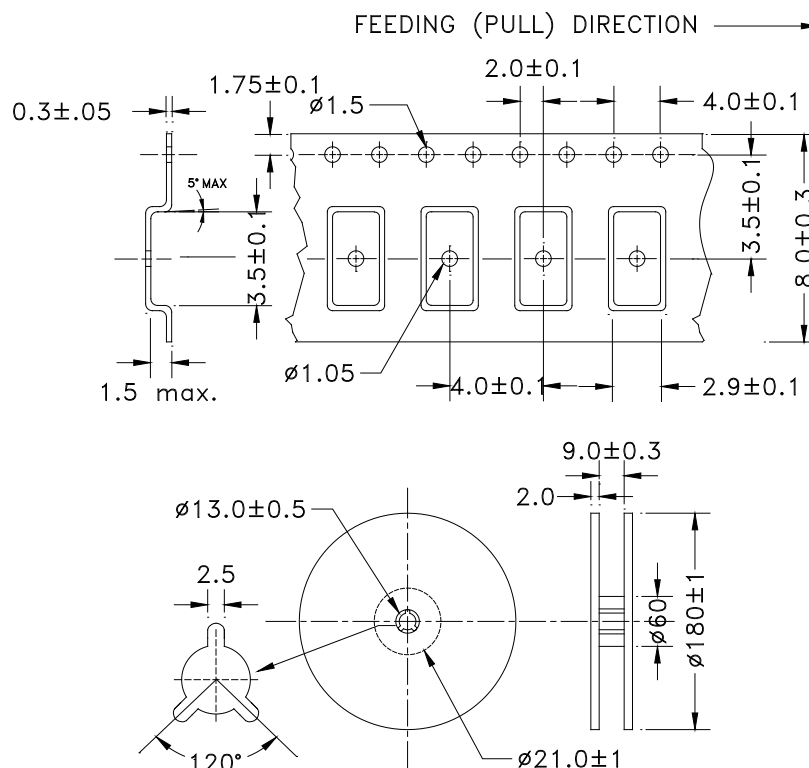

DIMENSIONS: mm