

# Molded Type Power Inductor



**ASPI-0530HI Series**

Request Samples



Check Inventory



5.7 x 5.3 x 3.0 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Features

- High saturation current.
- Low loss due to low DC resistance.
- Frequency application up to 3MHz.
- Low profile with max thickness 3.0mm.
- 100% lead free and RoHS compliant.
- Suitable for reflow soldering.
- High reliable SMD package

## Applications

- DC/DC converters in Notebook, Netbook, desktop and server
- Low profile, high current power supplies.

## Electrical Specifications

Part Number	Inductance	Tolerance	DCR Typ	DCR Max	Saturation Current	Temperature Rise Current
Units	$\mu\text{H}$	%	$\text{m}\Omega$	$\text{m}\Omega$	A	A
Symbol	L	M			Isat*	Irms*
ASPI-0530HI-1R0	1.0	M	13.0	14.0	11.0	7.0
ASPI-0530HI-1R5	1.5	M	20.0	25.0	10.0	6.0
ASPI-0530HI-2R2	2.2	M	29.0	35.0	9.0	5.5

## Test Conditions

Inductance is measured in HP-4284A Precision LCR Meter.

RDC is measured in HP-4338B milli ohm meter.(or equivalent).

Isat: Based on inductance change ( $\Delta L/L_0 : \leq -20\%$ )

Irms: Based on temperature rise ( $\Delta T : 40^\circ\text{C TYP.}$ )

**Operating Temperature & Humidity:  $-55^\circ\text{C}$  to  $+125^\circ\text{C}$  (Including self generated heat)**

**Storage Temperature & Humidity:  $+25^\circ\text{C}$  to  $+35^\circ\text{C}$ , 45% to 75% RH**



5101 Hidden Creek Ln, Spicewood TX 78669  
Phone: 512-371-6159 Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION B : 4/29/2022

ABRACON IS  
ISO9001-2015  
CERTIFIED

# Molded Type Power Inductor



**ASPI-0530HI Series**

Request Samples





Check Inventory





5.7 x 5.3 x 3.0 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Performance Graphs



### ASPI-0530HI-1R0

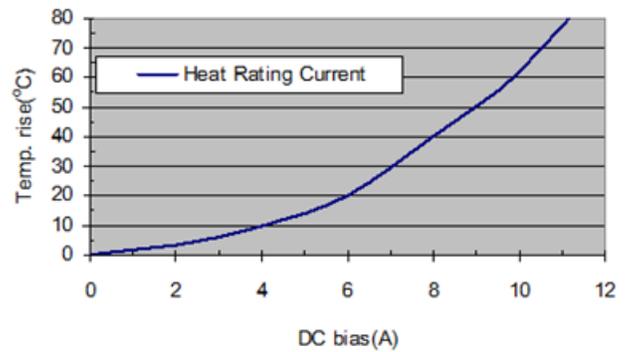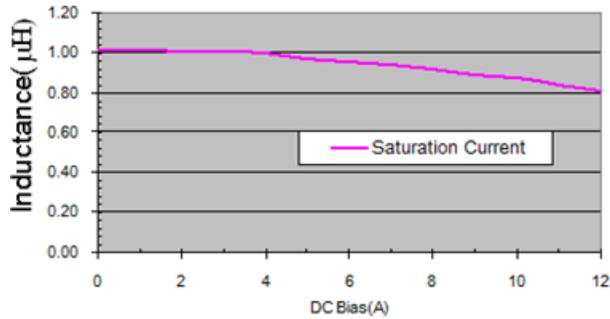

### ASPI-0530HI-1R5

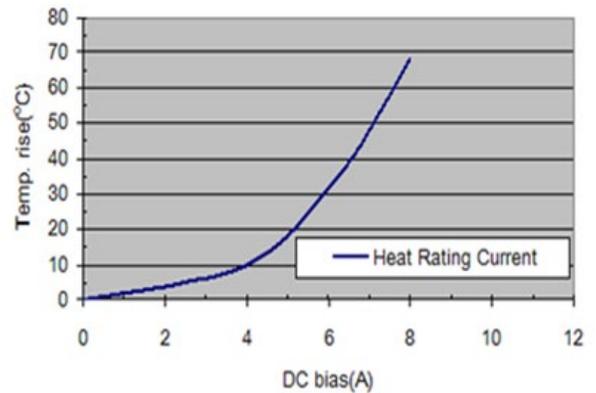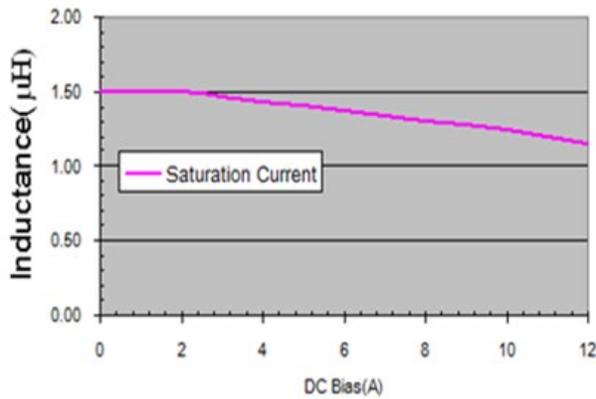

### ASPI-0530HI-2R2

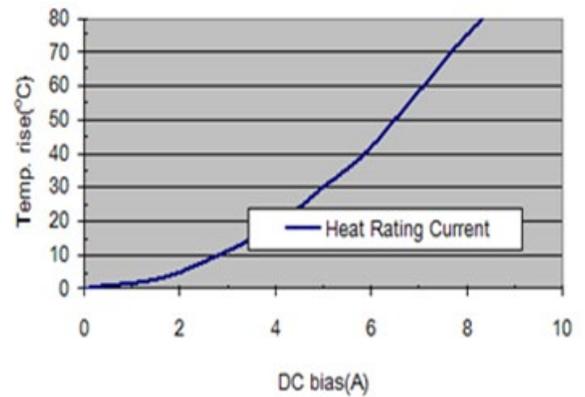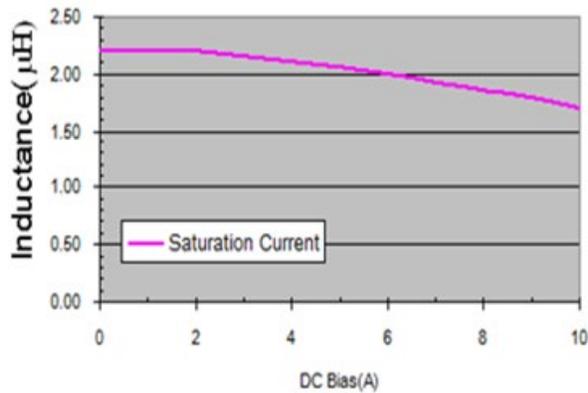

# Molded Type Power Inductor



**ASPI-0530HI Series**

Request Samples




Check Inventory




5.7 x 5.3 x 3.0 mm  
**RoHS/RoHS II Compliant**  
 MSL Level = 1

## Mechanical Specifications

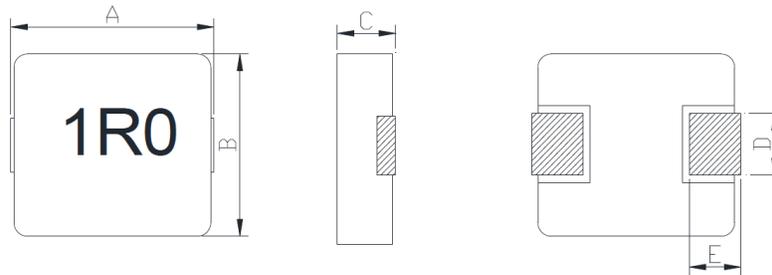

A	B	C	D	E
5.7 ±0.30	5.3 ±0.40	3.0 MAX	2.2 ±0.5	1.2 ±0.50

## Recommended Land Pattern

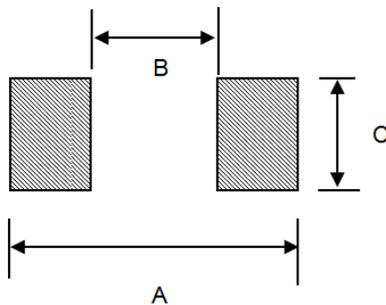

A	B	C
7.0 Typ	3.0 Typ	2.5 Typ

**Dimensions: mm**

## Part Number Identification

ASPI-0530HI -   -

**Inductance Code**  
 Please refer to the  
 Electrical  
 Specifications Table

**Tolerance**  
 M: ±20%

**Packaging**  
 T2: Tape & Reel 2,000 units



5101 Hidden Creek Ln, Spicewood TX 78669  
 Phone: 512-371-6159 Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

**REVISION B : 4/29/2022**

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

# Molded Type Power Inductor



ASPI-0530HI Series

Request Samples




Check Inventory



5.7 x 5.3 x 3.0 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Reflow Profile

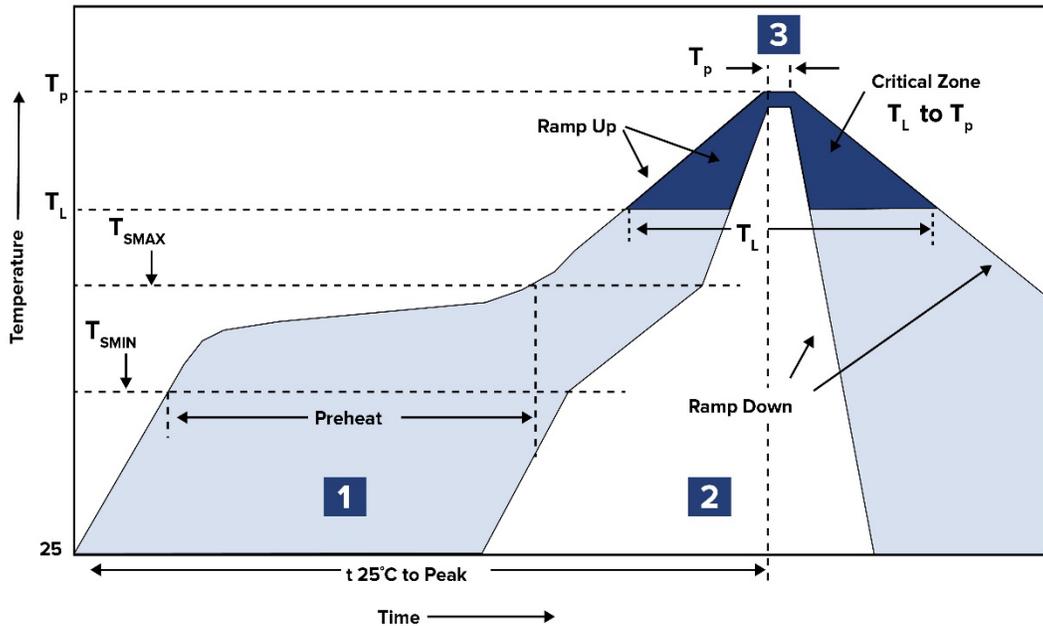

Zone	Description	Temperature	Times
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ 150°C ~ 200°C	60 ~ 120 sec.
2	Reflow	$T_L$ 200°C	20 sec.
3	Peak heat	$T_P$ 250°C	3 sec. MAX

# Molded Type Power Inductor



**ASPI-0530HI Series**

Request Samples




Check Inventory




5.7 x 5.3 x 3.0 mm  
**RoHS/RoHS II Compliant**  
 MSL Level = 1

## Packaging

**T2: 2,000pcs / reel**

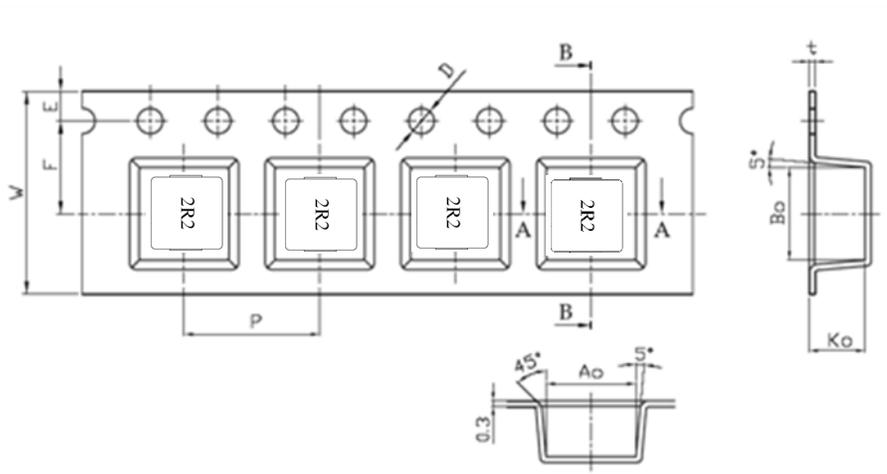

<b>A0</b>	<b>5.7 ±0.3</b>
<b>B0</b>	<b>5.9 ±0.3</b>
<b>K0</b>	<b>3.4 ±0.3</b>
<b>P</b>	<b>8.0 ±0.1</b>
<b>t</b>	<b>0.4 Typ</b>
<b>W</b>	<b>12 ±0.3</b>
<b>E</b>	<b>1.75 ±0.1</b>
<b>F</b>	<b>5.5 ±0.1</b>
<b>D</b>	<b>1.5 ±0.1</b>

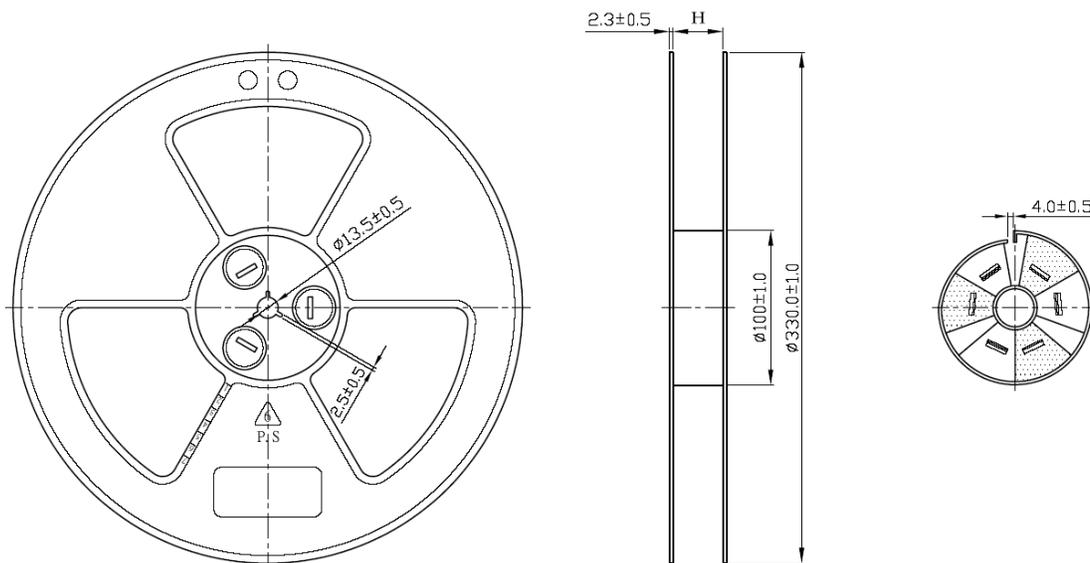

**ATTENTION:** Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln, Spicewood TX 78669  
 Phone: 512-371-6159 Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

**REVISION B : 4/29/2022**

ABRACON IS  
 ISO9001-2015  
 CERTIFIED