




Rev	AWO #	Description	Date	Appr
-		RELEASED	4/1/15	

APPROVED: _____

DATE: _____ TITLE: _____

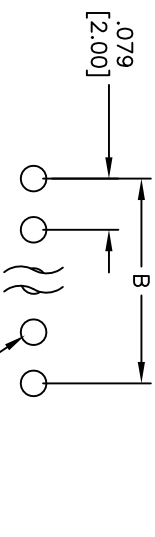

PCB LAYOUT

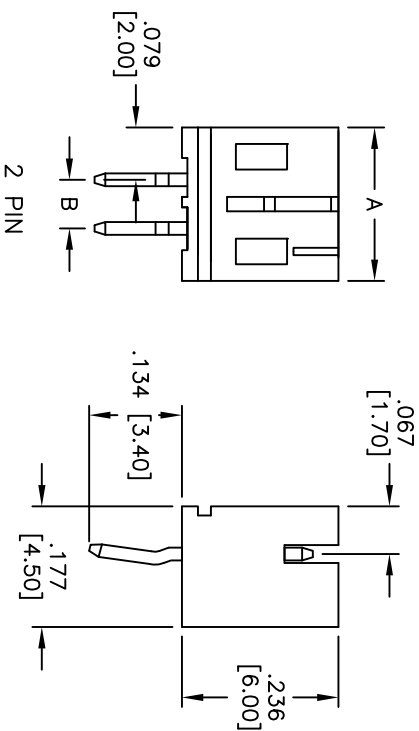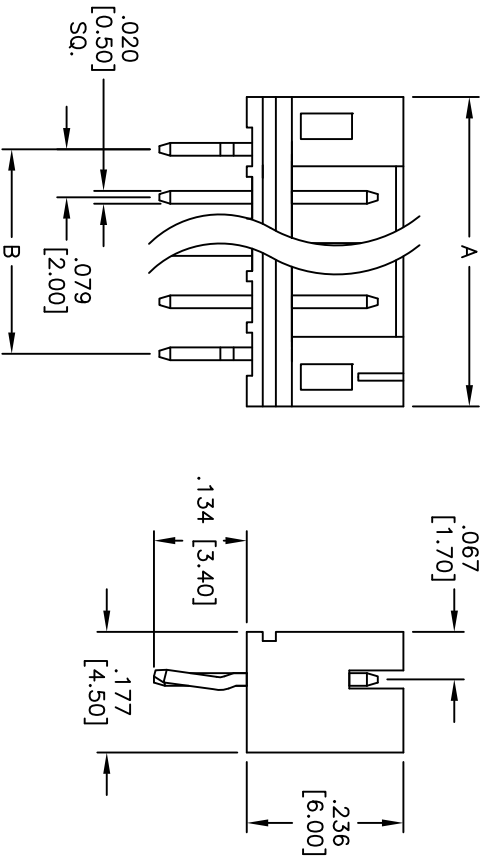

Positions: 2 thru 15
A = .079 [2.00] x No. of Positions + .079 [2.00]
B = .079 [2.00] x No. of Spoces

SPECIFICATIONS:
Material:
Insulator: Nylon, rated UL 94V-0
Contacts: Brass
Plating:
Gold flash over Nickel underplate overall
Electrical:
Operating voltage: 250 VAC max
Current rating: 2 Amps max
Dielectric withstanding voltage: 800 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant

ROHS
COMPLIANT

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.079 [2.00] SHRDEDDED HEADER
STRAIGHT, PCB, GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				HOLE			
.X	± .10	ØXX	± .10	.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN	AY		4/1/15				
CHECKED	RT		4/1/15				
APPROVED							
TITLE				SIZE			
PART NO.				REV.			
2SH-C-XX-GS				-			
REF: S00123T				SCALE: NTS			
SHEET 1 OF 1							