

# BC846, BC847, BC848

## General Purpose Transistors

### NPN Silicon

These transistors are designed for general purpose amplifier applications. They are housed in the SC-70/SOT-323 which is designed for low power surface mount applications.

#### Features

- S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

#### MAXIMUM RATINGS

| Rating   | Symbol    | Value             | Unit |
|--|-----------|-------------------|------|
| Collector-Emitter Voltage<br>BC846<br>BC847<br>BC848 | $V_{CEO}$ | 65<br>45<br>30    | V    |
| Collector-Base Voltage<br>BC846<br>BC847<br>BC848    | $V_{CBO}$ | 80<br>50<br>30    | V    |
| Emitter-Base Voltage<br>BC846<br>BC847<br>BC848      | $V_{EBO}$ | 6.0<br>6.0<br>5.0 | V    |
| Collector Current – Continuous                       | $I_C$     | 100               | mAdc |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### THERMAL CHARACTERISTICS



| Characteristic  | Symbol          | Max            | Unit                      |
|---|-----------------|----------------|---------------------------|
| Total Device Dissipation FR-5 Board,<br>(Note 1) $T_A = 25^\circ\text{C}$ | $P_D$           | 200            | mW                        |
| Thermal Resistance,<br>Junction-to-Ambient                                | $R_{\theta JA}$ | 620            | $^\circ\text{C}/\text{W}$ |
| Junction and Storage Temperature  | $T_J, T_{stg}$  | -55 to<br>+150 | $^\circ\text{C}$          |

1. FR-5 = 1.0 x 0.75 x 0.062 in.




**ON Semiconductor®**

[www.onsemi.com](http://www.onsemi.com)



**SC-70/SOT-323  
CASE 419  
STYLE 3**

#### MARKING DIAGRAM



XX = Specific Device Code  
M = Month Code  
▪ = Pb-Free Package  
(Note: Microdot may be in either location)

#### ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 12 of this data sheet.

# BC846, BC847, BC848

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)

| Characteristic   |  | Symbol               | Min               | Typ         | Max         | Unit     |
|--|--|----------------------|-------------------|-------------|-------------|----------|
| <b>OFF CHARACTERISTICS</b>   |  |                      |                   |             |             |          |
| Collector–Emitter Breakdown Voltage<br>(I <sub>C</sub> = 10 mA)                      | BC846 Series<br>BC847 Series<br>BC848 Series     | V <sub>(BR)CEO</sub> | 65<br>45<br>30    | –<br>–<br>– | –<br>–<br>– | V        |
| Collector–Emitter Breakdown Voltage<br>(I <sub>C</sub> = 10 μA, V <sub>EB</sub> = 0) | BC846 Series<br>BC847 Series<br>BC848 Series     | V <sub>(BR)CES</sub> | 80<br>50<br>30    | –<br>–<br>– | –<br>–<br>– | V        |
| Collector–Base Breakdown Voltage<br>(I <sub>C</sub> = 10 μA)                         | BC846 Series<br>BC847 Series<br>BC848 Series     | V <sub>(BR)CBO</sub> | 80<br>50<br>30    | –<br>–<br>– | –<br>–<br>– | V        |
| Emitter–Base Breakdown Voltage<br>(I <sub>E</sub> = 1.0 μA)                          | BC846 Series<br>BC847 Series<br>BC848 Series     | V <sub>(BR)EBO</sub> | 6.0<br>6.0<br>5.0 | –<br>–<br>– | –<br>–<br>– | V        |
| Collector Cutoff Current (V <sub>CB</sub> = 30 V)                                    | (V <sub>CB</sub> = 30 V, T <sub>A</sub> = 150°C) | I <sub>CBO</sub>     | –<br>–            | –<br>–      | 15<br>5.0   | nA<br>μA |

## ON CHARACTERISTICS

|  |  |                      |                   |                   |                   |    |
|--|--|----------------------|-------------------|-------------------|-------------------|----|
| DC Current Gain<br>(I <sub>C</sub> = 10 μA, V <sub>CE</sub> = 5.0 V)   | BC846A, BC847A, BC848A<br>BC846B, BC847B, BC848B<br>BC847C, BC848C | h <sub>FE</sub>      | –<br>–<br>–       | 90<br>150<br>270  | –<br>–<br>–       | –  |
| (I <sub>C</sub> = 2.0 mA, V <sub>CE</sub> = 5.0 V)   | BC846A, BC847A, BC848A<br>BC846B, BC847B, BC848B<br>BC847C, BC848C |                      | 110<br>200<br>420 | 180<br>290<br>520 | 220<br>450<br>800 |    |
| Collector–Emitter Saturation Voltage (I <sub>C</sub> = 10 mA, I <sub>B</sub> = 0.5 mA)<br>(I <sub>C</sub> = 100 mA, I <sub>B</sub> = 5.0 mA) |  | V <sub>CE(sat)</sub> | –<br>–            | –<br>–            | 0.25<br>0.6       | V  |
| Base–Emitter Saturation Voltage (I <sub>C</sub> = 10 mA, I <sub>B</sub> = 0.5 mA)<br>(I <sub>C</sub> = 100 mA, I <sub>B</sub> = 5.0 mA)      |  | V <sub>BE(sat)</sub> | –<br>–            | 0.7<br>0.9        | –<br>–            | V  |
| Base–Emitter Voltage (I <sub>C</sub> = 2.0 mA, V <sub>CE</sub> = 5.0 V)<br>(I <sub>C</sub> = 10 mA, V <sub>CE</sub> = 5.0 V)                 |  | V <sub>BE(on)</sub>  | 580<br>–          | 660<br>–          | 700<br>770        | mV |

## SMALL-SIGNAL CHARACTERISTICS

|  |  |                  |     |   |     |     |
|--|--|------------------|-----|---|-----|-----|
| Current–Gain – Bandwidth Product<br>(I <sub>C</sub> = 10 mA, V <sub>CE</sub> = 5.0 Vdc, f = 100 MHz)                 |  | f <sub>T</sub>   | 100 | – | –   | MHz |
| Output Capacitance (V <sub>CB</sub> = 10 V, f = 1.0 MHz)   |  | C <sub>obo</sub> | –   | – | 4.5 | pF  |
| Noise Figure (I <sub>C</sub> = 0.2 mA, V <sub>CE</sub> = 5.0 Vdc, R <sub>S</sub> = 2.0 kΩ, f = 1.0 kHz, BW = 200 Hz) |  | NF               | –   | – | 10  | dB  |

# BC846, BC847, BC848


## BC846A, BC847A, BC848A



**Figure 1. DC Current Gain vs. Collector Current**




**Figure 2. DC Current Gain vs. Collector Current**

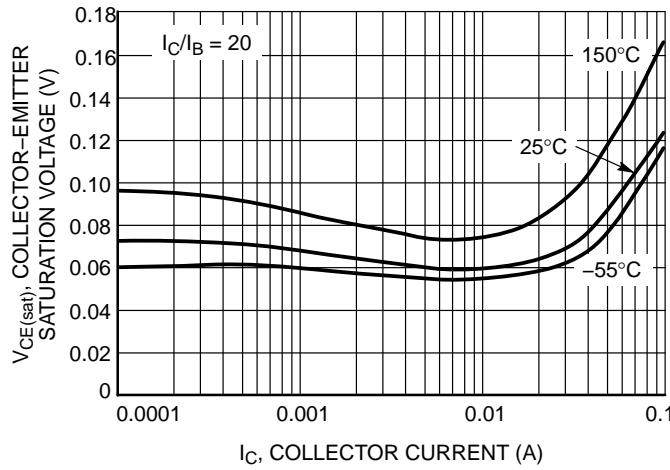

**Figure 3. Collector-Emitter Saturation Voltage vs. Collector Current**



**Figure 4. Base-Emitter Saturation Voltage vs. Collector Current**

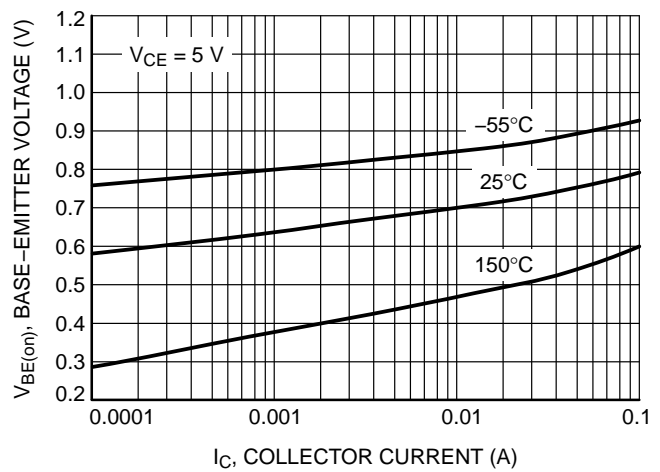

**Figure 5. Base-Emitter Voltage vs. Collector Current**

# BC846, BC847, BC848

## BC846A, BC847A, BC848A

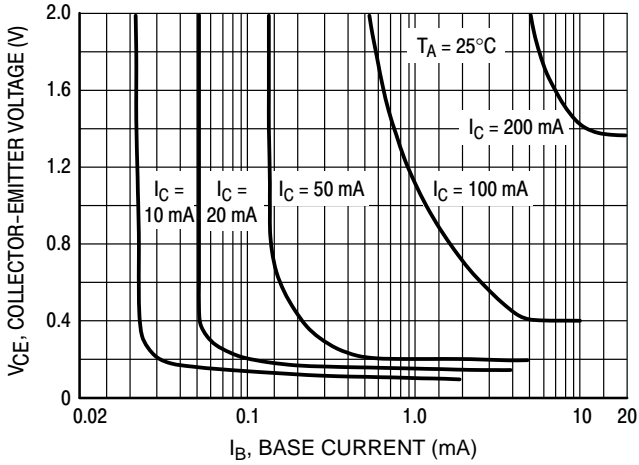


Figure 6. Collector Saturation Region



Figure 7. Base-Emitter Temperature Coefficient

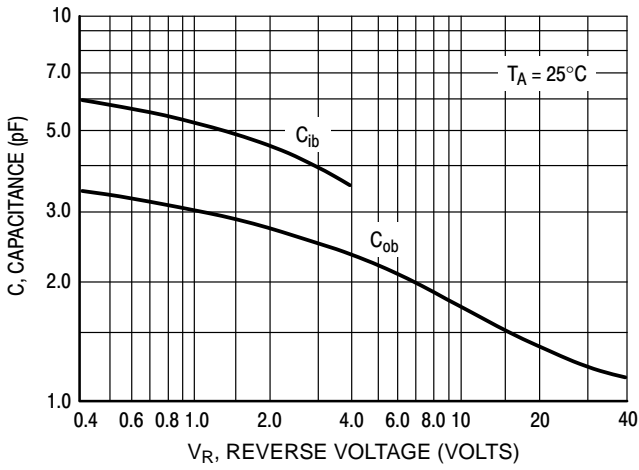


Figure 8. Capacitances



Figure 9. Current-Gain - Bandwidth Product

# BC846, BC847, BC848

## BC846B



**Figure 10. DC Current Gain vs. Collector Current**



**Figure 11. DC Current Gain vs. Collector Current**



**Figure 12. Collector Emitter Saturation Voltage vs. Collector Current**



**Figure 13. Base Emitter Saturation Voltage vs. Collector Current**



**Figure 14. Base Emitter Voltage vs. Collector Current**

BC846B



Figure 15. Collector Saturation Region



Figure 16. Base-Emitter Temperature Coefficient




Figure 17. Capacitance




Figure 18. Current-Gain - Bandwidth Product

# BC846, BC847, BC848


## BC847B, BC848B

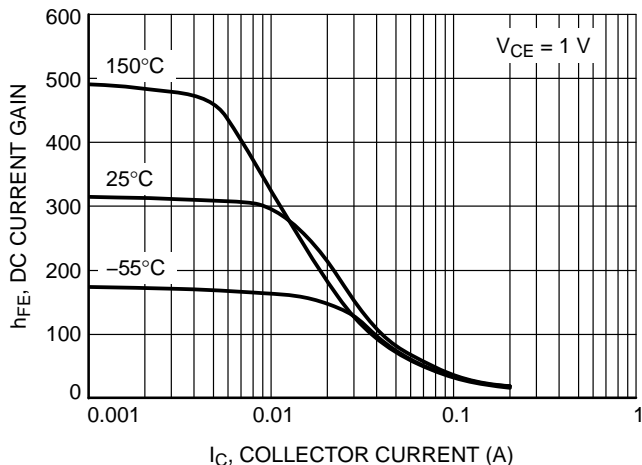


**Figure 19. DC Current Gain vs. Collector Current**

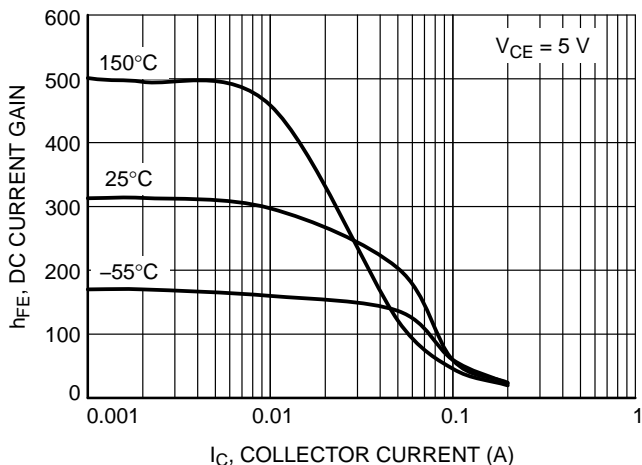


**Figure 20. DC Current Gain vs. Collector Current**

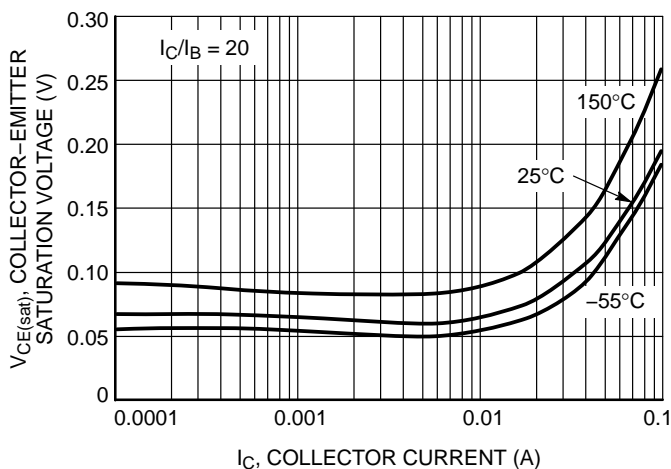

**Figure 21. Collector Emitter Saturation Voltage vs. Collector Current**

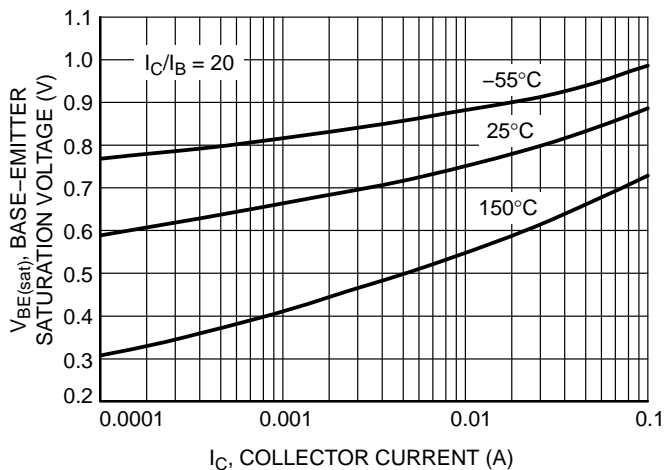

**Figure 22. Base Emitter Saturation Voltage vs. Collector Current**

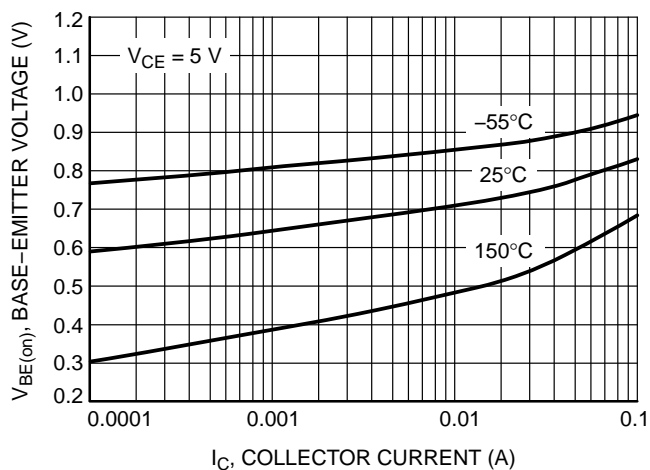

**Figure 23. Base Emitter Voltage vs. Collector Current**

BC846, BC847, BC848

BC847B, BC848B

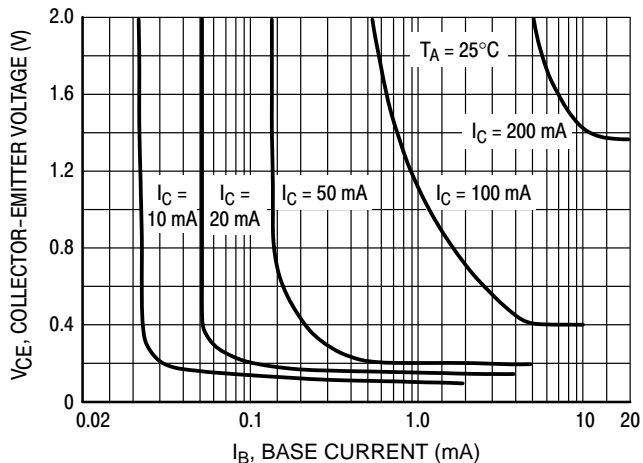


Figure 24. Collector Saturation Region



Figure 25. Base-Emitter Temperature Coefficient

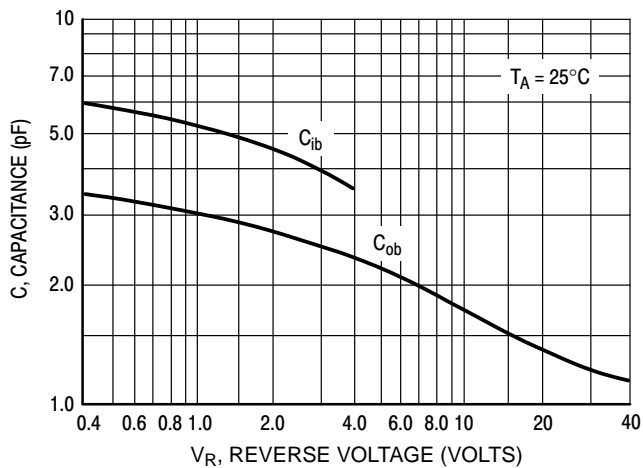


Figure 26. Capacitances


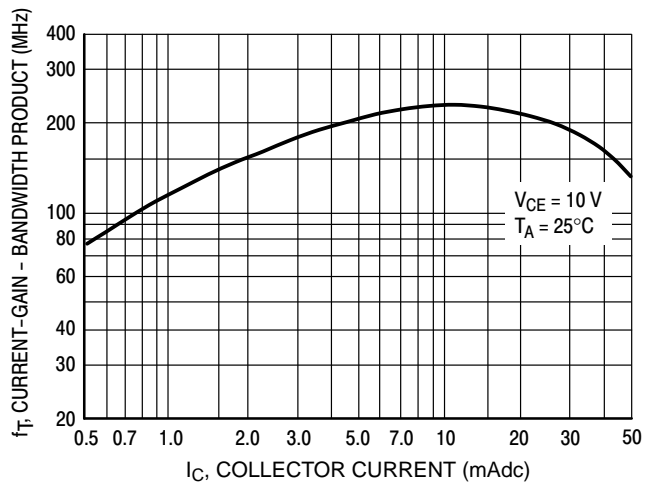


Figure 27. Current-Gain - Bandwidth Product




# BC846, BC847, BC848


## BC847C, BC848C

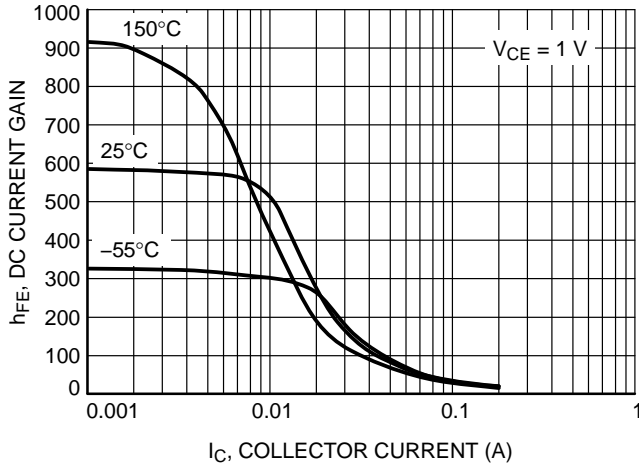


**Figure 28. DC Current Gain vs. Collector Current**

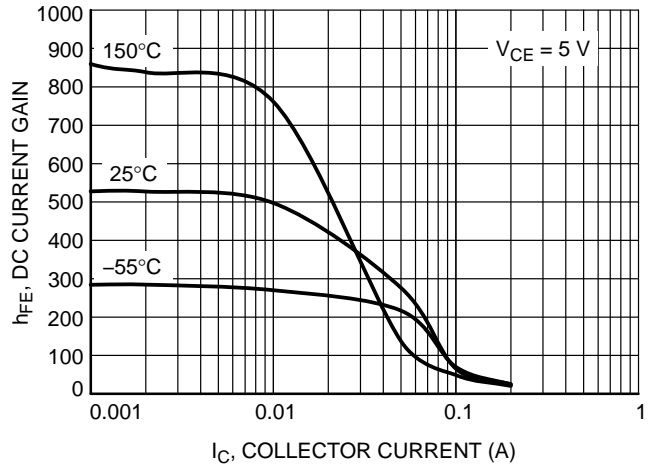


**Figure 29. DC Current Gain vs. Collector Current**

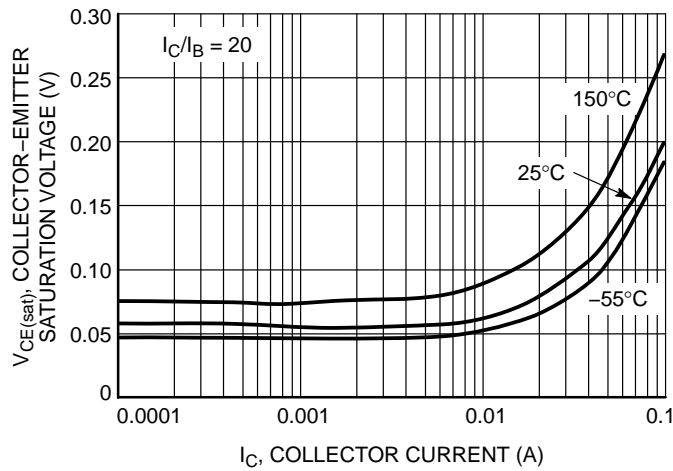

**Figure 30. Collector Emitter Saturation Voltage vs. Collector Current**

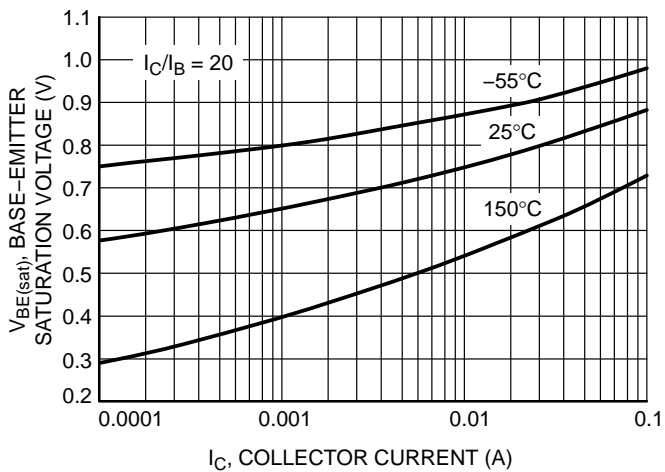

**Figure 31. Base Emitter Saturation Voltage vs. Collector Current**

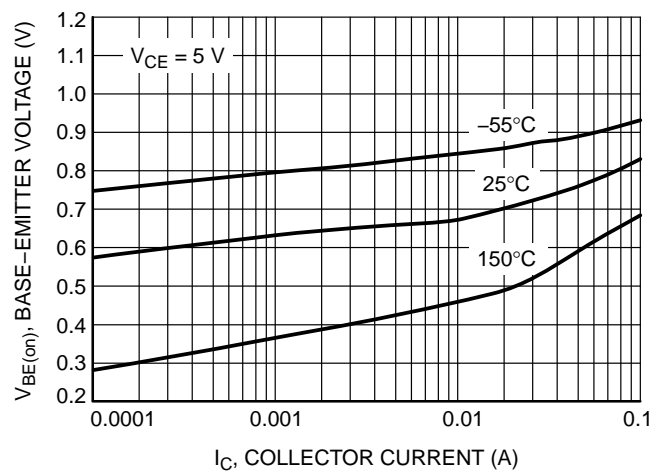

**Figure 32. Base Emitter Voltage vs. Collector Current**

BC846, BC847, BC848

BC847C, BC848C

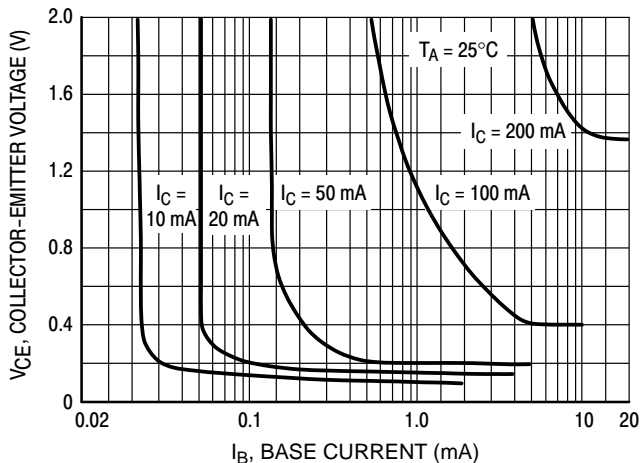


Figure 33. Collector Saturation Region

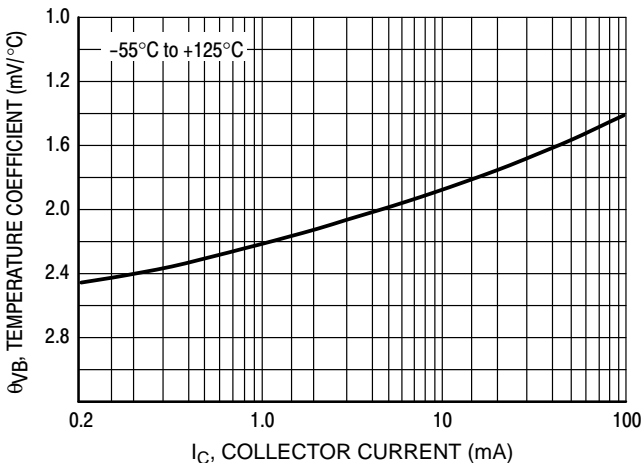


Figure 34. Base-Emitter Temperature Coefficient

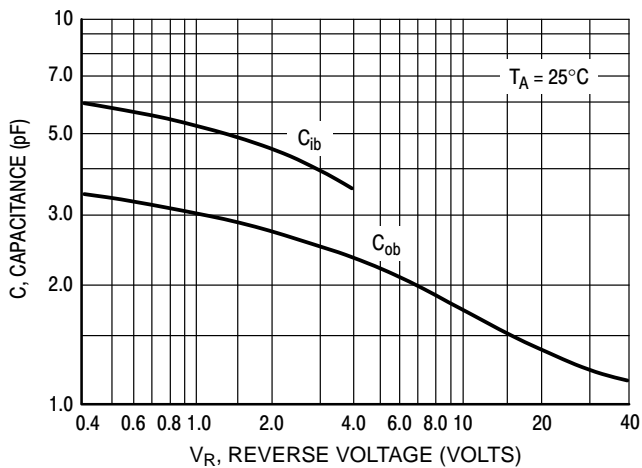


Figure 35. Capacitances

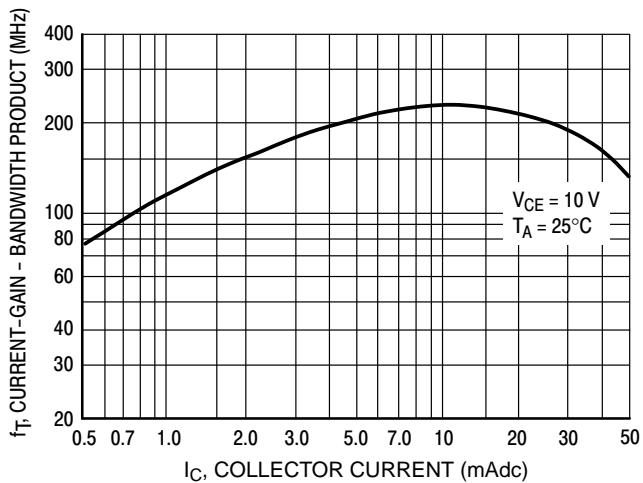


Figure 36. Current-Gain - Bandwidth Product

# BC846, BC847, BC848



**Figure 37. Safe Operating Area for BC846A, BC846B**



**Figure 38. Safe Operating Area for BC847A, BC847B, BC847C**



**Figure 39. Safe Operating Area for BC848A, BC848B, BC848C**

## BC846, BC847, BC848

### DEVICE ORDERING AND SPECIFIC MARKING INFORMATION

| Device         | Specific Marking Code | Package                      | Shipping†            |
|----------------|-----------------------|------------------------------|----------------------|
| BC846BWT1G     | 1B                    | SC-70 (SOT-323)<br>(Pb-Free) | 3,000 / Tape & Reel  |
| SBC846BWT1G*   |                       |                              |                      |
| BC847AWT1G     | 1E                    |                              | 3,000 / Tape & Reel  |
| SBC847AWT1G*   |                       |                              |                      |
| BC847BWT1G     | 1F                    |                              | 3,000 / Tape & Reel  |
| SBC847BWT1G*   |                       |                              |                      |
| BC847CWT1G     | 1G                    |                              | 3,000 / Tape & Reel  |
| SBC847CWT1G*   |                       |                              |                      |
| BC847CWT3G     | 1G                    |                              | 10,000 / Tape & Reel |
| SBC847CWT3G*   |                       |                              |                      |
| BC848BWT1G     | 1K                    |                              | 3,000 / Tape & Reel  |
| NSVBC848BWT1G* |                       |                              |                      |
| BC848CWT1G     | 1L                    |                              |                      |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS



SCALE 4:1

SC-70 (SOT-323)  
CASE 419  
ISSUE P

DATE 07 OCT 2021

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH



| DIM            | MILLIMETERS |      |      | INCHES    |       |       |
|----------------|-------------|------|------|-----------|-------|-------|
|                | MIN.        | NDM. | MAX. | MIN.      | NDM.  | MAX.  |
| A              | 0.80        | 0.90 | 1.00 | 0.032     | 0.035 | 0.040 |
| A1             | 0.00        | 0.05 | 0.10 | 0.000     | 0.002 | 0.004 |
| A2             | 0.70 REF    |      |      | 0.028 BSC |       |       |
| b              | 0.30        | 0.35 | 0.40 | 0.012     | 0.014 | 0.016 |
| c              | 0.10        | 0.18 | 0.25 | 0.004     | 0.007 | 0.010 |
| D              | 1.80        | 2.10 | 2.20 | 0.071     | 0.083 | 0.087 |
| E              | 1.15        | 1.24 | 1.35 | 0.045     | 0.049 | 0.053 |
| e              | 1.20        | 1.30 | 1.40 | 0.047     | 0.051 | 0.055 |
| e1             | 0.65 BSC    |      |      | 0.026 BSC |       |       |
| L              | 0.20        | 0.38 | 0.56 | 0.008     | 0.015 | 0.022 |
| H <sub>E</sub> | 2.00        | 2.10 | 2.40 | 0.079     | 0.083 | 0.095 |

GENERIC MARKING DIAGRAM



- XX = Specific Device Code
- M = Date Code
- = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.



\* For additional information on our Pb-Free strategy and soldering details, please download the DN Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

SOLDERING FOOTPRINT

- |   |   |   |  |   |   |
|---|---|---|--|---|---|
| STYLE 1:<br>CANCELLED                                 | STYLE 2:<br>PIN 1. ANODE<br>2. N.C.<br>3. CATHODE     | STYLE 3:<br>PIN 1. BASE<br>2. EMITTER<br>3. COLLECTOR | STYLE 4:<br>PIN 1. CATHODE<br>2. CATHODE<br>3. ANODE       | STYLE 5:<br>PIN 1. ANODE<br>2. ANODE<br>3. CATHODE          |   |
| STYLE 6:<br>PIN 1. EMITTER<br>2. BASE<br>3. COLLECTOR | STYLE 7:<br>PIN 1. BASE<br>2. EMITTER<br>3. COLLECTOR | STYLE 8:<br>PIN 1. GATE<br>2. SOURCE<br>3. DRAIN      | STYLE 9:<br>PIN 1. ANODE<br>2. CATHODE<br>3. CATHODE-ANODE | STYLE 10:<br>PIN 1. CATHODE<br>2. ANODE<br>3. ANODE-CATHODE | STYLE 11:<br>PIN 1. CATHODE<br>2. CATHODE<br>3. CATHODE |

|                  |                 |  |
|------------------|-----------------|--|
| DOCUMENT NUMBER: | 98ASB42819B     | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | SC-70 (SOT-323) | PAGE 1 OF 1  |

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Email Requests to: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**onsemi Website:** [www.onsemi.com](http://www.onsemi.com)

### TECHNICAL SUPPORT

**North American Technical Support:**

Voice Mail: 1 800-282-9855 Toll Free USA/Canada

Phone: 011 421 33 790 2910

**Europe, Middle East and Africa Technical Support:**

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative