
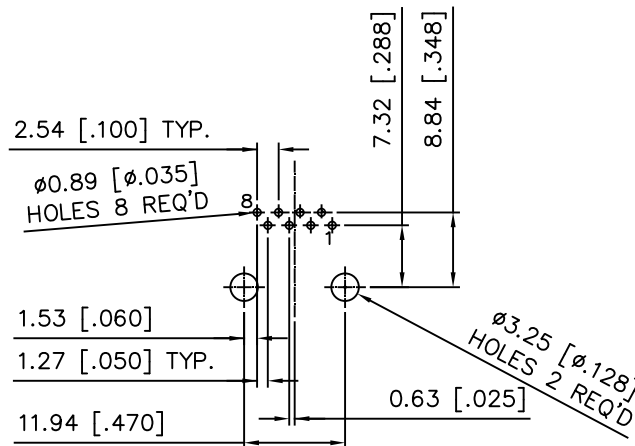
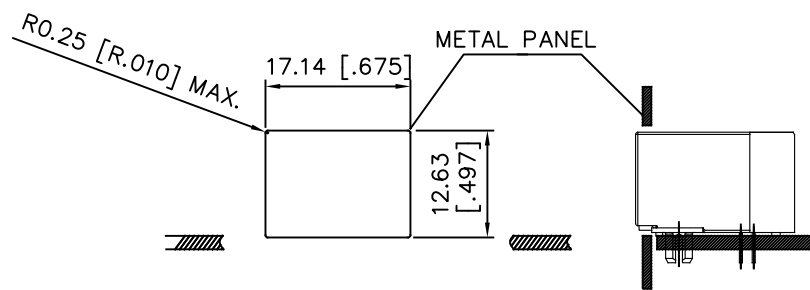
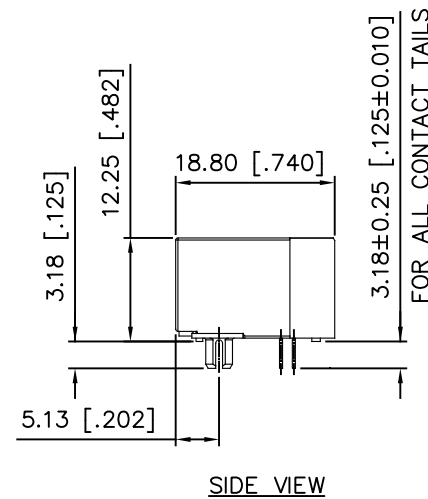


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL DRAWING	MAY17/18	L.CHAN



LOCATE HOLES  
 $\phi \phi 0.13 [.005]$   
 POSITION DIMENSIONS  
 ARE BASIC

# 1. MATERIALS

HOUSING: ENGINEERING THERMOPLASTIC;  
 FLAMMABILITY RATING UL 94V-0, COLOUR: BLACK.

CONTACTS: PHOSPHOR BRONZE  
 PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES  
 SEE AMPHENOL PART NUMBER FOR DETAIL.  
 50u" [1.27 MICRONS] MIN. NICKEL UNDERPLATE  
 100u" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS.

2. RECOMMENDED SOLDERING TEMPERATURE:  
 WAVE SOLDERING AT 260° C MAXIMUM FOR 5 SEC MAXIMUM.

3. AMPHENOL PART NUMBER: RJE37-188-0X00

GOLD PLATING OPTION  
 1=GOLD FLASH  
 2=6u" GOLD PLATING  
 3=15u" GOLD PLATING  
 4=30u" GOLD PLATING  
 5=50u" GOLD PLATING

UNLESS SPECIFIED OTHERWISE	DRAWN	AMY.Z	MAY17/18
PRIMARY UNITS MILLIMETERS	CHECKED	L.Chan	MAY17/18
SECONDARY INCHES	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES FOR MM	DWG APP'D		
1 DECIMAL PLACE ±0.40	ENG. REL. NO.		
2 DECIMAL PLACE ±0.30	REF.		
3 DECIMAL PLACE ±0.25	THIRD ANGLE PROJECTION		
ANGULAR DEGREES ±1.5°	DO NOT SCALE DRAWING		

Amphenol Canada Corp. Commercial Products			
SINGLE PORT MODULAR JACK, LOW PROFILE, 8 POSITION, 8 CONTACTS, UNSHIELDED WITHOUT LED. -RoHS COMPLIANT.			
DWG NO.	P-RJE37-188-0X00		
REV	A		
CODE ID NO. 03554	DWG SIZE: C	SCALE: N/A	SHEET 1 OF 1