

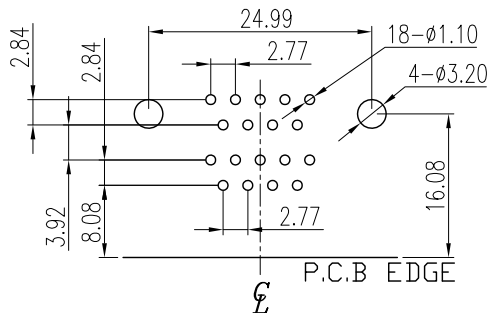
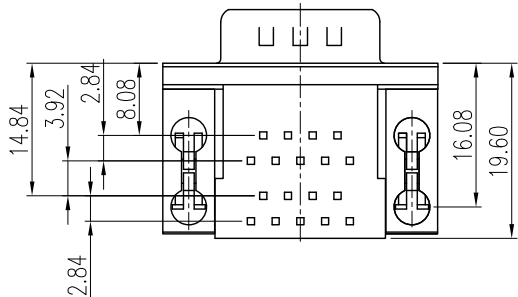


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

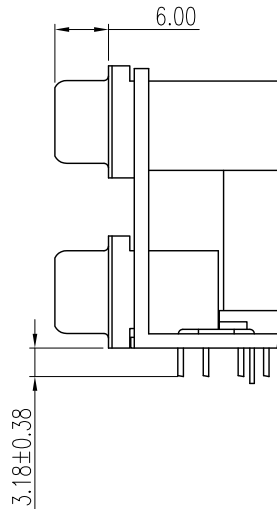

RECOMMENDED P.C.B LAYOUT
TOLERANCE: +/-.05MM

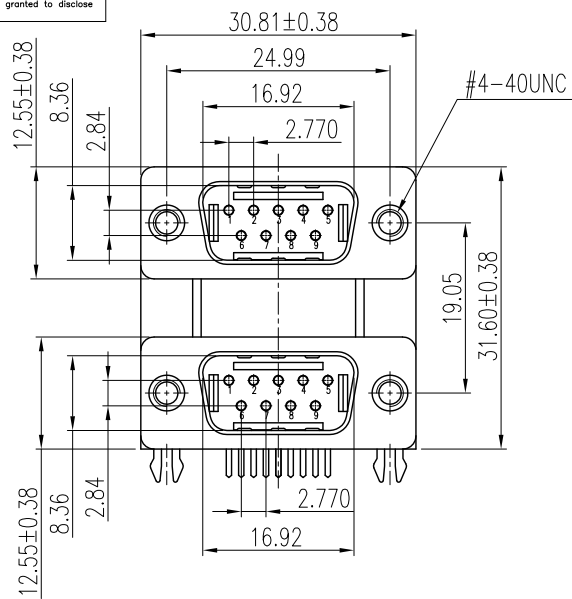


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HK--	First Release Drawing	12/18/08	IP
2	HK--	Update the drawing	06/11/14	IP

D-SUB TECHNICAL DATA

SHELL : Steel,100u"tin plated over 50u"nickel over 50u"copper
 BODY : PBT UL 94V-0 Color: Black.
 CONTACTS : Brass.
 30u"gold plated over 50u"nickel on mating area
 100u"tin plated over 50u"nickel on solder area
 BRACKET : Zinc Alloy,nickel plated
 BOARDLOCK: Copper Alloy,tin plated
 ELECTRICAL : Contact Resistance : 25 Milliohms Maximum.
 Insulation Resistance : 1000 Megohms Minimum
 Dielectric Withstanding Voltage : AC 1000V/60sec.
 Current Rating : 3AMP
 Voltage Rating : 250V(AC)

PRODUCT CODE

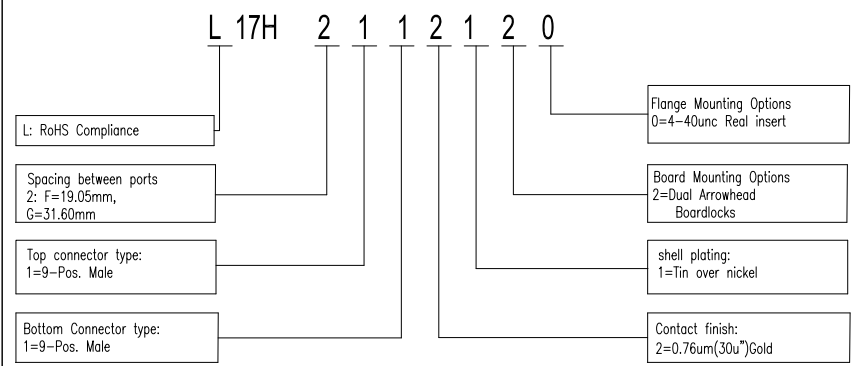

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE
U.S.	METRIC	DRAWN	Checked	DATE
.X	+/-		Felix Liu	06/11/14
.XX	+/-		Tony Tang	06/11/14
.XXX	+/-		CHECKED	
FRACTIONS	+/-	DRAWING FILE :		
ANGLES	+/-	ANGLE OF PROJECTION		
FOR MATERIALS AND FINISHES SEE NOTES				
REMOVE SHARP EDGES		DIMENSIONS		
U.S. INCHES		U.S. INCHES		
METRIC MM		METRIC MM		

Amphenol		Amphenol East Asia Limited	
TITLE			
Dual port D-SUB,L17H series			
SIZE	DRAWING NO.	REV.	
A4	L17H2112120	2	
SCALE	NONE	SHEET 1 OF 1	