
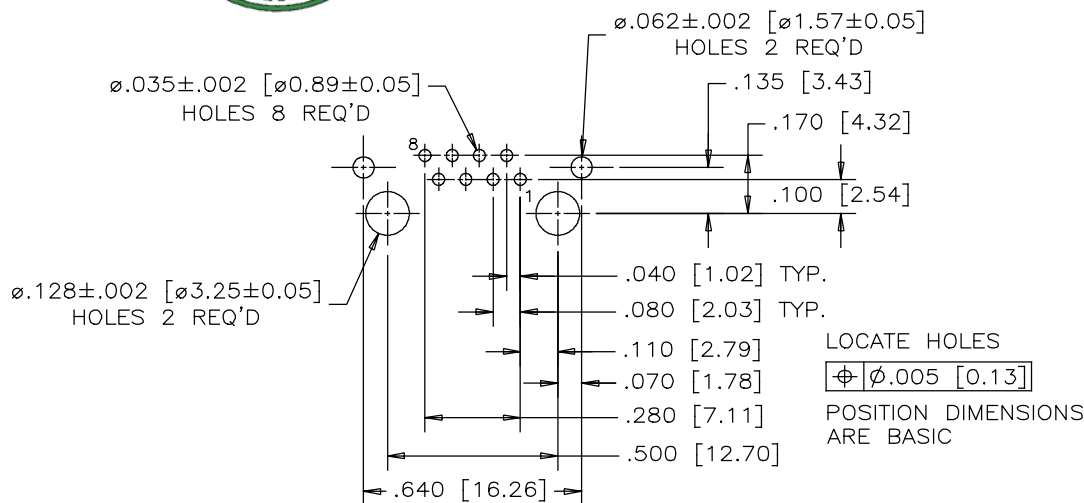
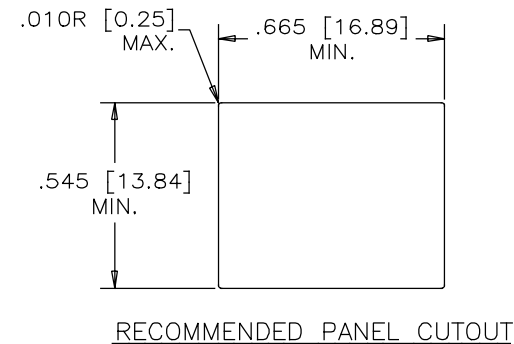
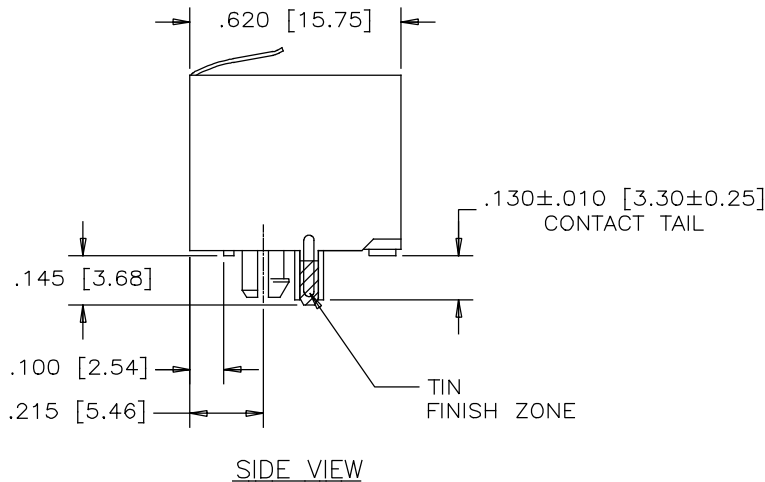


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	MAR08/18	L.CHAN

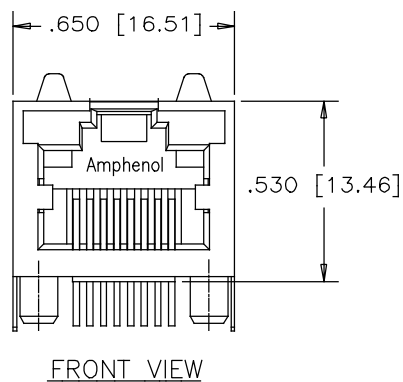

MATERIALS:
PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0, COLOR BLACK

CONTACTS: PHOSPHOR BRONZE
PLATING: GOLD PLATING ON MATING SURFACE.
[SEE PART NUMBER FOR THICKNESS]
50 μ " [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ " [2.54 MICRONS]
MIN. MATTE TIN ON CONTACT TAILS.

SHIELD: STAINLESS STEEL WITH TIN FINISH ON SOLDER TAIL

AMPHENOL PART NUMBER: RJHSE-X380-A1

GOLD PLATING
E=RJ45 FLAT CONTACT 6u"
G=RJ45 FLAT CONTACT 15u"
J=RJ45 FLAT CONTACT 30u"
5=RJ45 FLAT CONTACT 50u"

UNLESS SPECIFIED OTHERWISE		DRAWN	W.Q/U	DATE	MAR08/18	Amphenol Canada Corp. www.amphenolcanada.com	
PRIMARY UNITS	INCH	CHECKED	L.CHAN	DATE	MAR08/18		
SECONDARY	MILLIMETER	M.E. APP'D		Q.A. APP'D		TITLE	
REFERENCE IN PARENTHESES		DWG APPR.		ENG. REL. NO.		DWG. NO.	
GENERAL TOLERANCES		REF.		THIRD ANGLE PROJECTION		P-RJHSE-X380-A1	
1 DECIMAL PLACE	±0.025	DO NOT SCALE DRAWING		CODE ID NO. 03554		REV A	
2 DECIMAL PLACES	±0.020			DWG SIZE: C		SHEET 1 OF 1	
3 DECIMAL PLACES	±0.015			SCALE: N/A			
ANGULAR DEGREES	±1.0°						

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.