

Click to
ORDER
samples

AM2DS-RZ



The AM2DS-RZ is a 2W SIP7 DC/DC converter that offers high product quality by the improved manufacturing process. It also features excellent reliability and performance while offering a standard input voltage range of 3.3-24VDC as well as an output voltage range of 3.3-15V. This compact SIP7 design will surely benefit your new system design.


This new series offers great operating temperatures, from -40 to 90°C with full power up to 80°C. Also, isolation of 3000 and 6000VDC options for improved reliability and system safety as well as a great 2,320,000h MTBF come standard.

The AM2DS-RZ is suitable for instrumentation, industrial controls, industrial digital isolation applications, isolated communication interface and IoT applications.


Features

- High I/O Isolation of 3000/6000VDC
- Continuous Short circuit protection
- Operating Temp: -40 °C to +90 °C
- Industry standard SIP7 pin-out
- Efficiency up to 87%
- Unregulated output
- Functional insulation


Summary

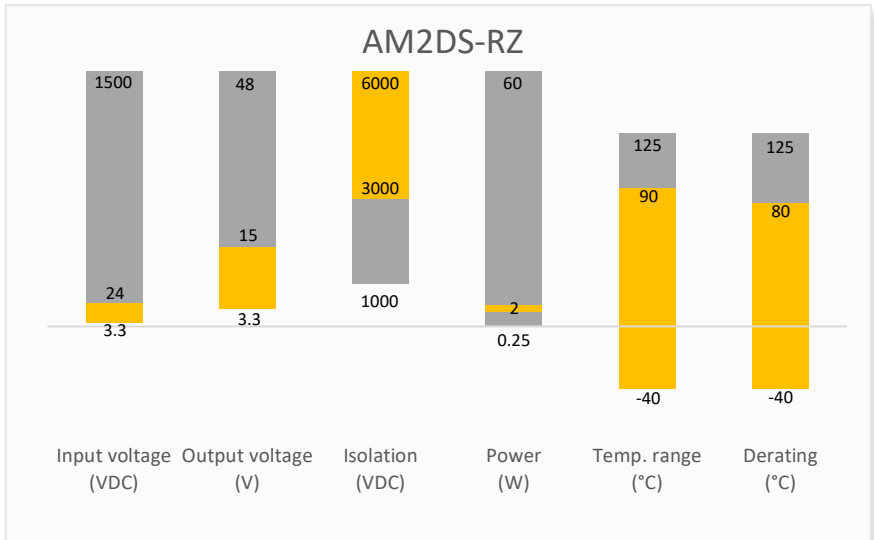

Training



Product Training Video
(click to open)



Press Release

Coming Soon!

Application Notes

Applications



Models & Specifications



Single Output							
Model	Input Voltage (VDC)	Output Voltage (VDC)	Input Current Full No load typ. (mA)	Output Current max (mA)*	Isolation (VDC)	Maximum capacitive Load (μF)	Efficiency Typ. (%)
AM2DS-0303SH30RZ	3.3 (2.97-3.63)	3.3	657 / 55	500	3000	3300	76
AM2DS-0305SH30RZ	3.3 (2.97-3.63)	5	777 / 65	400	3000	2200	78
AM2DS-0312SH30RZ	3.3 (2.97-3.63)	12	739 / 70	166	3000	470	82
AM2DS-0315SH30RZ	3.3 (2.97-3.63)	15	748 / 80	133	3000	470	81
AM2DS-0503SH30RZ	5 (4.5-5.5)	3.3	423 / 50	500	3000	3300	78
AM2DS-0505SH30RZ	5 (4.5-5.5)	5	493 / 50	400	3000	2200	81
AM2DS-0512SH30RZ	5 (4.5-5.5)	12	470 / 50	166	3000	470	85
AM2DS-0515SH30RZ	5 (4.5-5.5)	15	465 / 50	133	3000	470	86
AM2DS-1203SH30RZ	12 (10.8-13.2)	3.3	174 / 25	500	3000	3300	79
AM2DS-1205SH30RZ	12 (10.8-13.2)	5	200 / 30	400	3000	2200	83
AM2DS-1212SH30RZ	12 (10.8-13.2)	12	193 / 35	166	3000	470	86
AM2DS-1215SH30RZ	12 (10.8-13.2)	15	193 / 30	133	3000	470	86
AM2DS-2403SH30RZ	24 (21.6-26.4)	3.3	88 / 20	500	3000	3300	78
AM2DS-2405SH30RZ	24 (21.6-26.4)	5	100 / 20	400	3000	2200	83
AM2DS-2412SH30RZ	24 (21.6-26.4)	12	95 / 20	166	3000	470	87
AM2DS-2415SH30RZ	24 (21.6-26.4)	15	95 / 20	133	3000	470	87
AM2DS-0303SH60RZ	3.3 (2.97-3.63)	3.3	657 / 55	500	6000	3300	76
AM2DS-0305SH60RZ	3.3 (2.97-3.63)	5	777 / 65	400	6000	2200	78
AM2DS-0312SH60RZ	3.3 (2.97-3.63)	12	739 / 70	166	6000	470	82
AM2DS-0315SH60RZ	3.3 (2.97-3.63)	15	748 / 80	133	6000	470	81
AM2DS-0503SH60RZ	5 (4.5-5.5)	3.3	423 / 50	500	6000	3300	78
AM2DS-0505SH60RZ	5 (4.5-5.5)	5	493 / 50	400	6000	2200	81
AM2DS-0512SH60RZ	5 (4.5-5.5)	12	470 / 50	166	6000	470	85
AM2DS-0515SH60RZ	5 (4.5-5.5)	15	465 / 50	133	6000	470	86
AM2DS-1203SH60RZ	12 (10.8-13.2)	3.3	174 / 25	500	6000	3300	79
AM2DS-1205SH60RZ	12 (10.8-13.2)	5	200 / 30	400	6000	2200	83
AM2DS-1212SH60RZ	12 (10.8-13.2)	12	193 / 35	166	6000	470	86
AM2DS-1215SH60RZ	12 (10.8-13.2)	15	193 / 30	133	6000	470	86
AM2DS-2403SH60RZ	24 (21.6-26.4)	3.3	88 / 20	500	6000	3300	78
AM2DS-2405SH60RZ	24 (21.6-26.4)	5	100 / 20	400	6000	2200	83
AM2DS-2412SH60RZ	24 (21.6-26.4)	12	95 / 20	166	6000	470	87
AM2DS-2415SH60RZ	24 (21.6-26.4)	15	95 / 20	133	6000	470	87

* Performance will be degraded if the load is not within the output current range.

Dual Output							
Model	Input Voltage (VDC)	Output Voltage (VDC)	Input Current Full No load typ. (mA)	Output Current max (mA)*	Isolation (VDC)	Maximum capacitive Load (μF)	Efficiency Typ. (%)
AM2DS-0303DH30RZ	3.3 (2.97-3.63)	±3.3	632 / 50	±250	3000	±1680	79
AM2DS-0305DH30RZ	3.3 (2.97-3.63)	±5	748 / 60	±200	3000	±1000	81
AM2DS-0312DH30RZ	3.3 (2.97-3.63)	±12	730 / 70	±83	3000	±220	83
AM2DS-0315DH30RZ	3.3 (2.97-3.63)	±15	721 / 80	±66	3000	±220	84

AM2DS-0503DH30RZ	5 (4.5-5.5)	±3.3	407 / 45	±250	3000	±1680	81
AM2DS-0505DH30RZ	5 (4.5-5.5)	±5	481 / 55	±200	3000	±1000	83
AM2DS-0512DH30RZ	5 (4.5-5.5)	±12	459 / 50	±83	3000	±220	87
AM2DS-0515DH30RZ	5 (4.5-5.5)	±15	459 / 60	±66	3000	±220	87
AM2DS-1203DH30RZ	12 (10.8-13.2)	±3.3	169 / 30	±250	3000	±1680	81
AM2DS-1205DH30RZ	12 (10.8-13.2)	±5	196 / 30	±200	3000	±1000	85
AM2DS-1212DH30RZ	12 (10.8-13.2)	±12	193 / 35	±83	3000	±220	86
AM2DS-1215DH30RZ	12 (10.8-13.2)	±15	191 / 40	±66	3000	±220	87
AM2DS-2403DH30RZ	24 (21.6-26.4)	±3.3	84 / 20	±250	3000	±1680	81
AM2DS-2405DH30RZ	24 (21.6-26.4)	±5	98 / 20	±200	3000	±1000	85
AM2DS-2412DH30RZ	24 (21.6-26.4)	±12	95 / 25	±83	3000	±220	87
AM2DS-2415DH30RZ	24 (21.6-26.4)	±15	95 / 25	±66	3000	±220	87
AM2DS-0303DH60RZ	3.3 (2.97-3.63)	±3.3	632 / 50	±250	6000	±1680	81
AM2DS-0305DH60RZ	3.3 (2.97-3.63)	±5	748 / 60	±200	6000	±1000	83
AM2DS-0312DH60RZ	3.3 (2.97-3.63)	±12	730 / 70	±83	6000	±220	87
AM2DS-0315DH60RZ	3.3 (2.97-3.63)	±15	721 / 80	±66	6000	±220	87
AM2DS-0503DH60RZ	5 (4.5-5.5)	±3.3	407 / 45	±250	6000	±1680	81
AM2DS-0505DH60RZ	5 (4.5-5.5)	±5	481 / 55	±200	6000	±1000	85
AM2DS-0512DH60RZ	5 (4.5-5.5)	±12	459 / 50	±83	6000	±220	86
AM2DS-0515DH60RZ	5 (4.5-5.5)	±15	459 / 60	±66	6000	±220	87
AM2DS-1203DH60RZ	12 (10.8-13.2)	±3.3	169 / 30	±250	6000	±1680	81
AM2DS-1205DH60RZ	12 (10.8-13.2)	±5	196 / 30	±200	6000	±1000	85
AM2DS-1212DH60RZ	12 (10.8-13.2)	±12	193 / 35	±83	6000	±220	87
AM2DS-1215DH60RZ	12 (10.8-13.2)	±15	191 / 40	±66	6000	±220	87
AM2DS-2403DH60RZ	24 (21.6-26.4)	±3.3	84 / 20	±250	6000	±1680	80
AM2DS-2405DH60RZ	24 (21.6-26.4)	±5	98 / 20	±200	6000	±1000	82
AM2DS-2412DH60RZ	24 (21.6-26.4)	±12	95 / 25	±83	6000	±220	78
AM2DS-2415DH60RZ	24 (21.6-26.4)	±15	95 / 25	±66	6000	±220	77

* Performance will be degraded if the load is not within the output current range.

Input Specification

Parameters	Conditions	Typical	Maximum	Units
Filter	Capacitor			
Absolute maximum rating	Maximum duration 100ms, 3.3Vin		6	VDC
	Maximum duration 100ms, 5Vin		9	VDC
	Maximum duration 100ms, 12Vin		18	VDC
	Maximum duration 100ms, 24Vin		30	VDC
Input reflected ripple current*		20		mA pk-pk
Fuse (non-mandatory)	3.3Vin slow blow type	1.5		A
	5Vin slow blow type	1.0		A
	12Vin slow blow type	0.5		A
	24Vin, slow blow type	0.2		A

* Measured with a simulated source inductance of 12μH and a source capacitor Cin (47μF, ESR<1Ω at 100KHz).

Isolation Specification

Parameters	Conditions	Typical	Maximum	Units
Tested I/O voltage	60 sec, leakage ≤ 1mA for H30 models	>3000		VDC
	60 sec, leakage ≤ 1mA for H60 models	>6000		VDC
Resistance (I/O)		>1000		MΩ

Capacitance (I/O)		65	pF
Insulation type	Functional insulation		

Output Specification				
Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy	Nominal Vin		±3	%
Line regulation	Per 1% Vin change		±1.2	%
Load regulation	10-100% load, 3.3V / 5V output models		20	%
	10-100% load, 12V / 24V output models		15	%
Cross regulation	Asymmetrical load 25% / 100% for dual output, 3.3V / 5V input models		±8	%
	Asymmetrical load 25% / 100% for dual output, 12V / 24V input models		±6	%
Ripple & Noise*		100	200	mV pk-pk
Start-up time	Constant resistive load		10	ms
Temperature coefficient	Full load		±0.02	%/°C

* Ripple and Noise are measured at 20MHz bandwidth by using a 0.1µF MLCC.

General Specifications				
Parameters	Conditions	Typical	Maximum	Units
Switching frequency		100		KHz
Short circuit protection	Continuous, Auto recovery			
Operating temperature	With derating	-40 ~ +90		°C
Storage temperature		-40 ~ +125		°C
Case temperature			115	°C
Thermal impedance		>45		°C/W
Soldering temperature	1.5mm away from case, duration ≤ 10sec		260	°C
Cooling	Natural convection	>30	65	LFM
Humidity			95	% RH
Case material	Black plastic (flammability to UL 94V-0)			
Pin material	Tinned copper			
Potting material	Silicone (UL 94V-0)			
Weight		2.3		g
Dimensions (L x W x H)	0.76 x 0.24 x 0.39 inches (19.50 x 6.00 x 10.00 mm)			
MTBF	2 320 000 hrs (MIL-HDBK -217F, t=+25°C) / Full Load			



NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

Safety Specifications		
Parameters		
Agency approvals	CE, EN62368-1	
Standards	Information technology Equipment	Design to meet IEC/UL62368-1
	EMC - Conducted and radiated emission	EN55032, class B with the recommended EMI circuit
	Electrostatic Discharge Immunity	IEC 61000-4-2 Air ±15KV, Contact ±8KV, Criteria A
	RF, Electromagnetic Field Immunity	IEC 61000-4-3 10V/m, Criteria A
	Electrical Fast Transient/Burst Immunity	IEC 61000-4-4 ±2KV, Criteria A with the recommended EMI circuit
	Surge Immunity	IEC 61000-4-5 ±2KV, Criteria A with the recommended EMI circuit
	RF, Conducted Disturbance Immunity	IEC 61000-4-6 10Vr.m.s, Criteria A
	Power-frequency magnetic field Immunity	IEC 61000-4-8 100A/m, Criteria A

Derating

24Vin and efficiency < 85%



Others

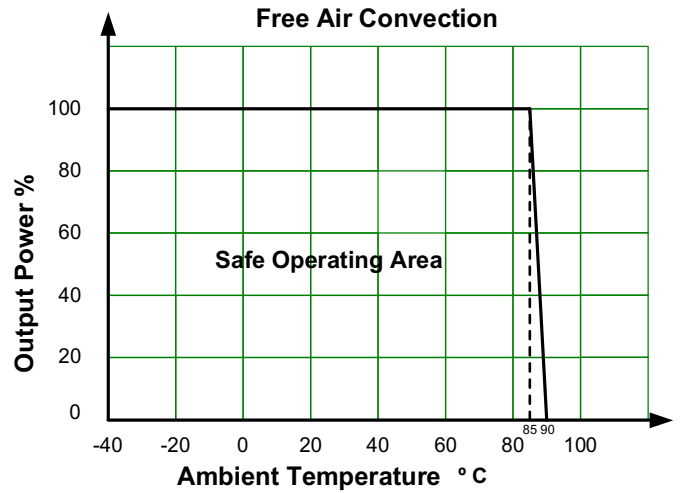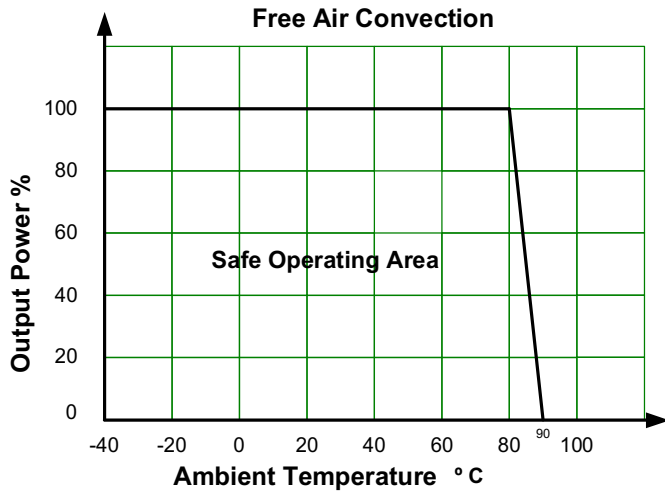


Output voltage tolerance

All 3.3/5Vout models

All 12/24Vout models

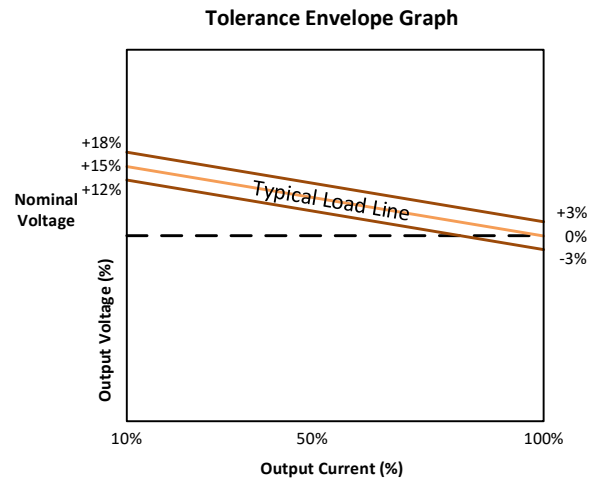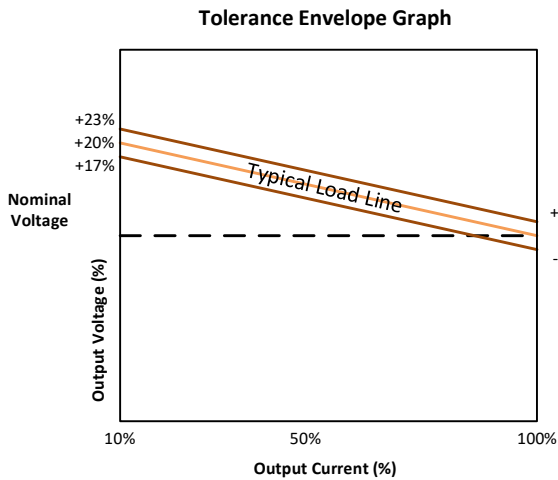



Recommended EMI circuit

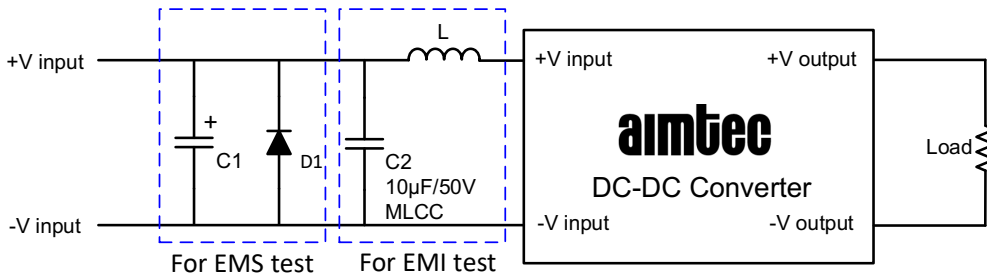

Vin	C1	D1
3.3V	NIPPON Chemi-con KY series 470µF/100V	SMDJ6A
5V		SMDJ9A
12V		SMDJ18A
24V	NIPPON Chemi-con KY series 680µF/100V	SMDJ30A

Note : L → 10µH for 3.3/5/12Vin models ; L → 22µH for others

Dimensions

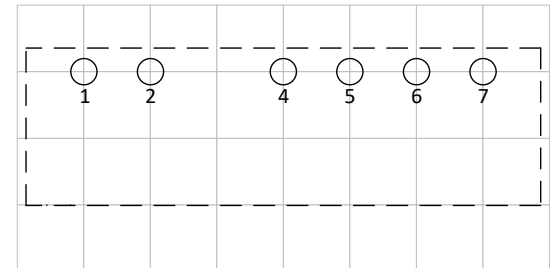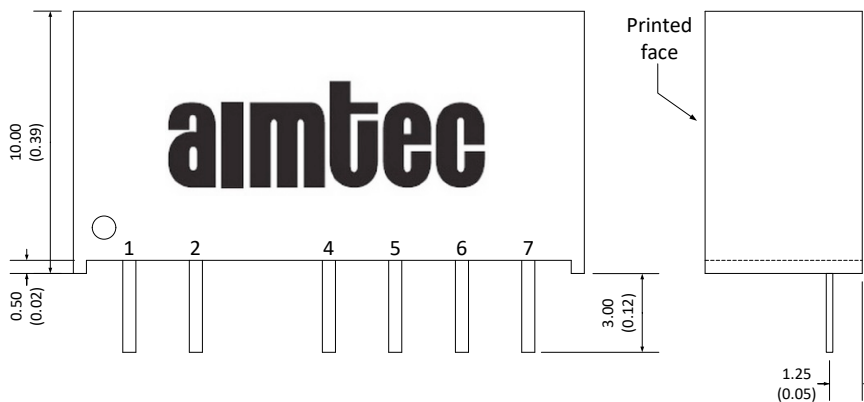

Grid size : 2.54*2.54mm
Through hold : Ø0.8 (0.031)
Top view pad : Ø1.0 (0.039)
Bottom view pad : Ø1.6 (0.063)

Note:
Unit: mm(inch)
General tolerance: ±0.5 (0.02)
Pin tolerance: ±0.05 (0.002)
Pin pitch and length tolerance: ±0.35 (0.014)

Pin Out Specifications

Pin	3KV isolation Single output	3KV isolation Dual output	6KV isolation Single output	6KV isolation Dual output
1	+V Input	+V Input	+V Input	+V Input
2	-V Input	-V Input	-V Input	-V Input
4	-V Output	-V Output	No pin	No pin
5	No pin	Com	-V Output	-V Output
6	+V Output	+V Output	No pin	Com
7	No pin	No pin	+V Output	+V Output

NOTE: **1.** Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.