


AMDGT-JZ

Click to
ORDER
samples

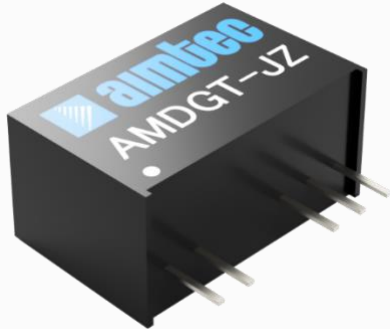

SIP7 Package

The AMDGT-JZ is a 2.4W SIP7 DC/DC converter that offers great cost savings thanks to an improved manufacturing process. It also features excellent reliability and performance while offering a standard input voltage range of 5-24VDC as well as dual output voltage of -9V to +15V. This compact SIP7 design will surely benefit your new IGBT gate deriving design.

This series offers great operating temperatures, from -40°C to +105°C with full power up to 85°C. It also features an isolation of 5000VAC for high reliability and system safety. Furthermore, a high MTBF of 3,500,000h, output short circuit protection (OSCP) come standard with the series.


The AMDGT-JZ is suitable for IGBT gate driver, UPS, inverter, VFD, instrumentation, industrial controls, industrial applications, motor driver applications.

Features

- High I/O Isolation of 5000VAC
- Extreme low isolation capacitance of 3.5pF
- Continuous Short circuit protection
- Operating Temp: -40 °C to +105 °C
- Industry standard SIP7 pin-out
- Efficiency up to 87%
- Unregulated output
- IGBT gate driver direct support



Summary

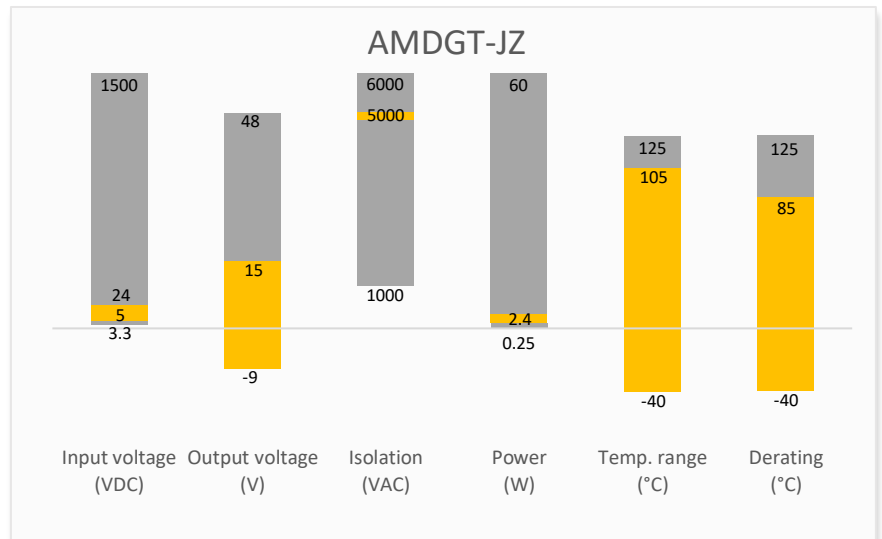

Training



Product Training Video
(click to open)



Press Release

Coming Soon!

Application Notes

Applications



IoT



Industrial



Telecom



Portable Equipment

Models & Specifications

Dual Output						
Model	Input Voltage (VDC)	Output Voltage (VDC)	Input Current Full No load typ. (mA)	Output Current max (mA)*	Maximum capacitive Load (μF)	Efficiency Typ. (%)
AMDGT-051509DA50JZ	5 (4.5-5.5)	15 (14.55~16.05) / -8.7 (-8.32~-9.2)	382 / 62	80 / -40	±1000	82
AMDGT-121509DA50JZ	12 (10.8-13.2)	15 (13.5~15) / -8.3 (-7.92~-8.82)	242 / 8	100 / -100	±2200	87
AMDGT-12W1509DA50JZ	12 (9.0-15.0)	15 (13.5~15) / -8.3 (-7.92~-8.82)	242 / 8	100 / -100	±2200	87
AMDGT-151509DA50JZ	15 (13.5-16.5)	15 (14.25~15.75) / -8.3 (-7.92~-8.82)	195 / 8	100 / -100	±2200	87
AMDGT-241509DA50JZ	24 (21.6-26.4)	15 (14.55~16.05) / -8.8 (-8.37~-9.27)	135 / 9	100 / -100	±2200	82

* Performance will be degraded if the load is not within the output current range.

Input Specification				
Parameters	Conditions	Typical	Maximum	Units
Filter	Capacitor			
Absolute maximum rating	Maximum duration 1000ms, 5Vin	> -0.7	9	VDC
	Maximum duration 1000ms, 12Vin	> -0.7	18	VDC
	Maximum duration 1000ms, 15Vin	> -0.7	21	VDC
	Maximum duration 1000ms, 24Vin	> -0.7	30	VDC

Isolation Specification					
Parameters	Conditions	Typical	Maximum	Units	
Tested I/O voltage	60 sec, leakage ≤ 1mA	>5000		VAC	
Resistance (I/O)	500VDC	>1000		MΩ	
Isolation capacitance (I/O)	100KHz/0.1V	3.5	5	pF	
Continuous barrier withstand voltage	Input – Output (According to 61800-5-1)	>1700		V	
CMTI (I/O)		±200		kV/μs	

Output Specification					
Parameters	Conditions	Typical	Maximum	Units	
Voltage accuracy	10%~100% load, see output voltage tolerance curve		10	%	
Line regulation	Full Vin change, 5Vin models	±1.1	±1.4	%	
	Full Vin change, Others	±1.1	±1.5	%	
Load regulation	10-100% load	>6	15	%	
Ripple & Noise	20MHz bandwidth, 5Vin model	50	150	mV pk-pk	
	20MHz bandwidth, Others	50	100	mV pk-pk	
Temperature coefficient	Full load	±0.04	±0.1	%/°C	

General Specifications				
Parameters	Conditions	Typical	Maximum	Units
Switching frequency		200		KHz
Short circuit protection	Continuous, Auto recovery			

Operating temperature	With derating	-40 ~ +105		°C
Storage temperature		-55 ~ +125		°C
Case temperature rise	Room temperature, full load	30	60	°C
Soldering temperature	1.5mm away from case, duration ≤ 10sec		300	°C
Cooling	Free air convection	--	--	LFM
Storage humidity		>5	95	% RH
Case material	Black plastic			
Weight		4.3		g
Dimensions (L x W x H)	0.77 x 0.39 x 0.49 inches (19.50 x 9.80 x 12.50 mm)			
MTBF	3 500 000 hrs (MIL-HDBK -217F, t=+25°C) / Full Load			
NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.				


Safety Specifications

Parameters


Agency approvals	CE EN62368-1	
Standards	Information technology Equipment	UL62368-1
	EMC - Conducted and radiated emission	CISPR32/EN55032, class A with the recommended EMI circuit CISPR32/EN55032, class B with the recommended EMI circuit (5Vin model only)
	Electrostatic Discharge Immunity	IEC 61000-4-2 Contact ±6KV, Criteria B (5Vin models) IEC 61000-4-2 Contact ±8KV, Criteria B (Others)

Derating

5Vin models

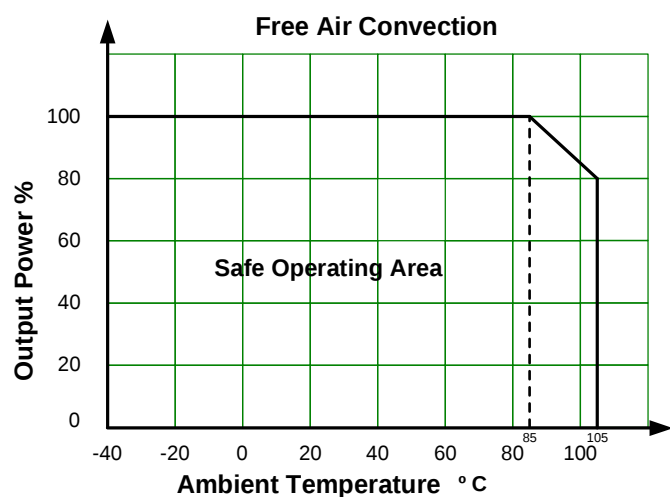


Others

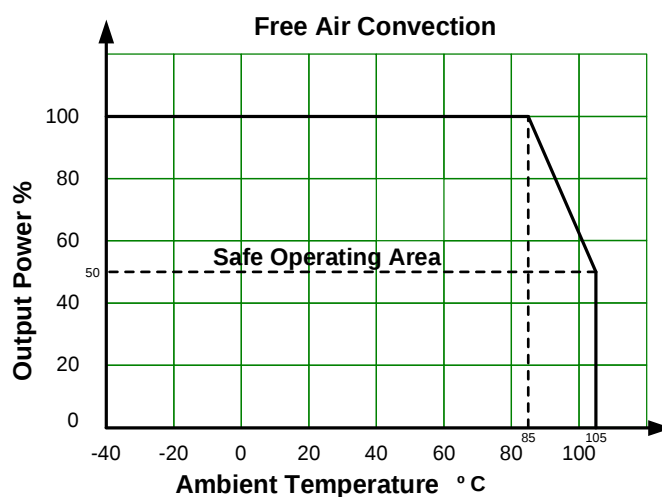

Output voltage tolerance


5Vin / +Vout

Tolerance Envelope Graph

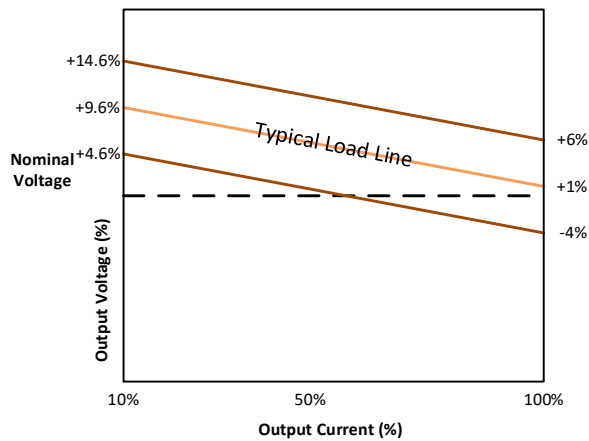


5Vin / -Vout

Tolerance Envelope Graph

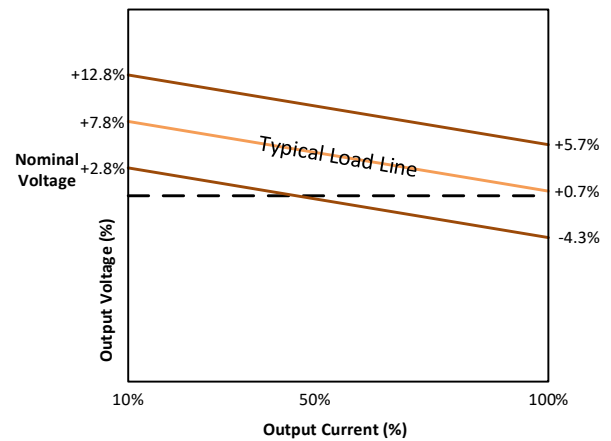


12Vin / +Vout

Tolerance Envelope Graph

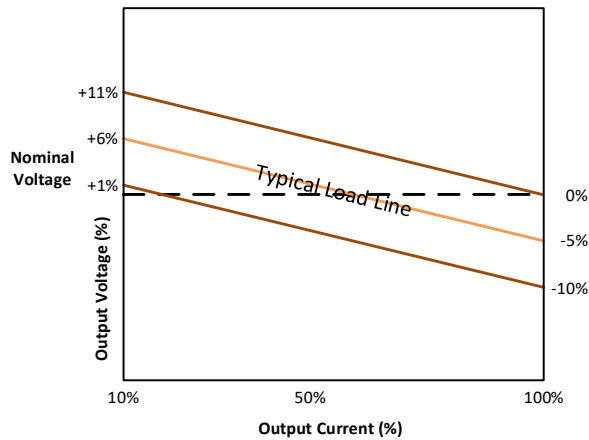


12Vin / -Vout

Tolerance Envelope Graph

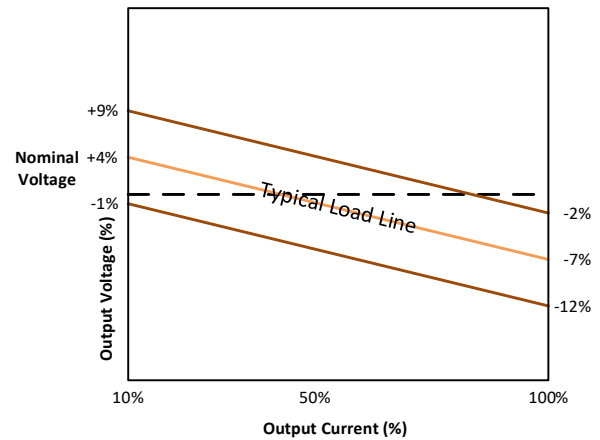


15Vin / +Vout

Tolerance Envelope Graph

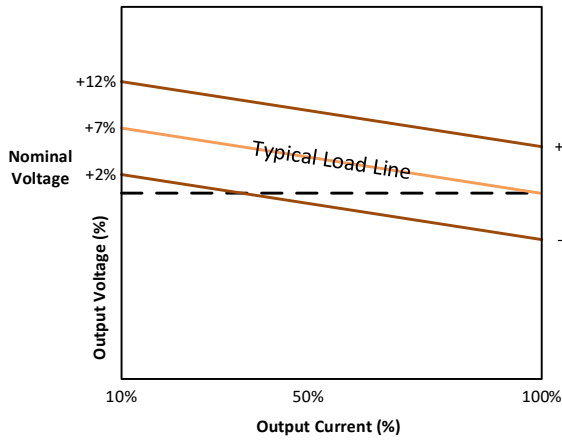


15Vin / -Vout

Tolerance Envelope Graph

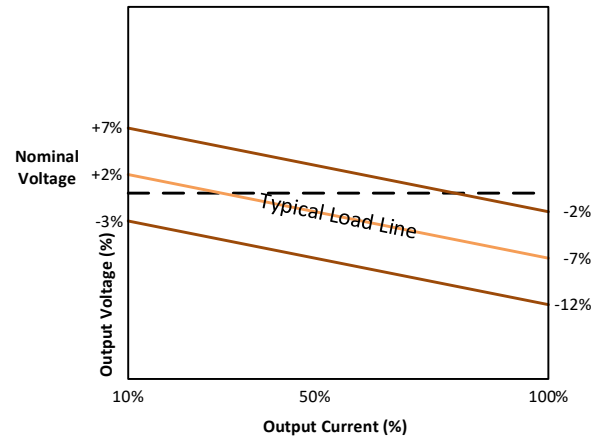


24Vin / +Vout

Tolerance Envelope Graph

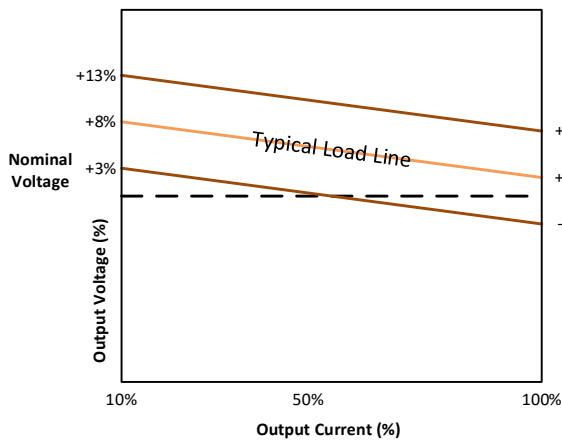

24Vin / -Vout

Tolerance Envelope Graph

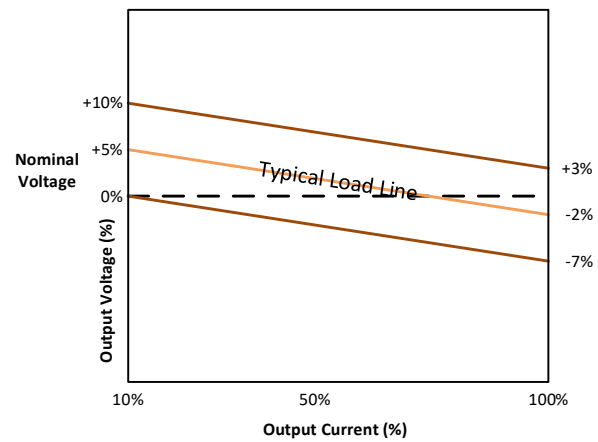


Test configurations





C1/C2/C3 : Low ESR capacitors


Typical application circuit

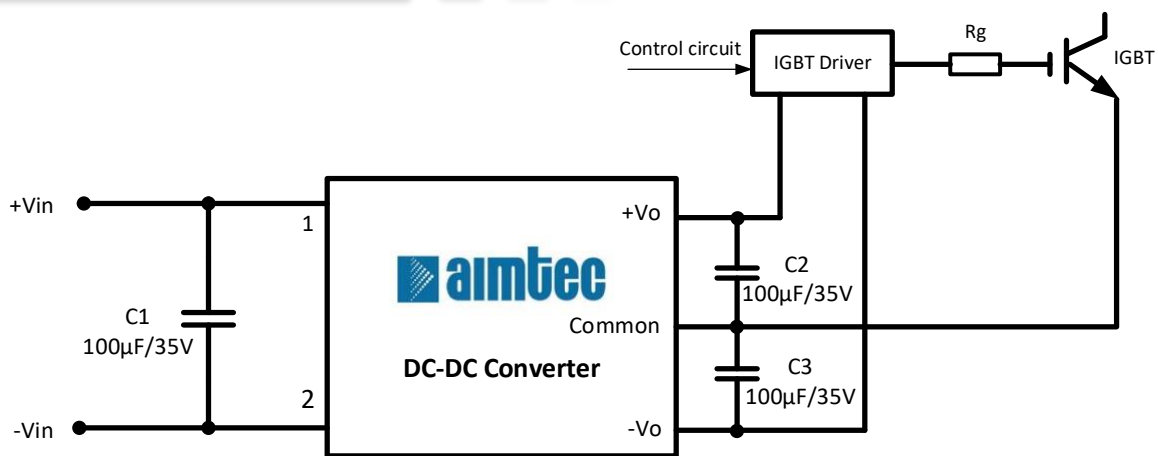

C1/C2/C3 : Low ESR capacitors


Recommended EMI circuit

CLASS A for all models

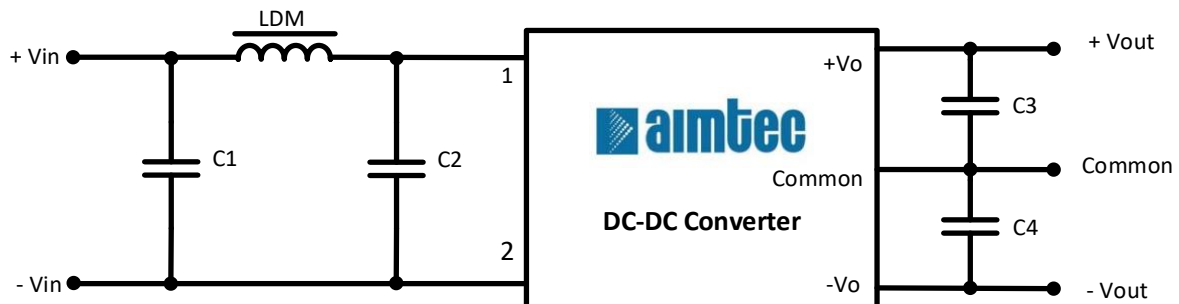


Vin	C1 / C2	C3 / C4	LDM
5V	4.7µF/16V	10µF/50V (Low ESR)	6.8µH
Others	1µF/50V	100µF/35V (Low ESR)	33µH

CLASS B for 5Vin model only

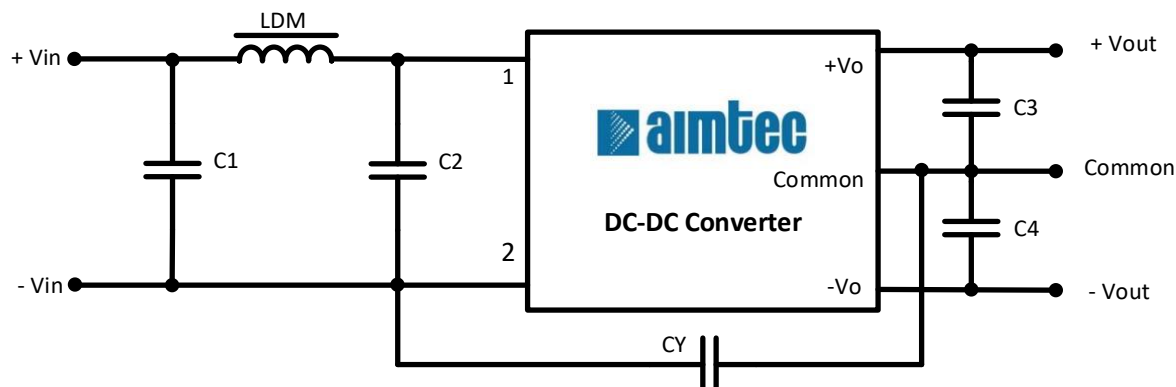

Vin	C1 / C2	C3 / C4	LDM	CY
5V	4.7μF/16V	10μF/50V (Low internal resistance)	6.8μH	330pF

Dimensions

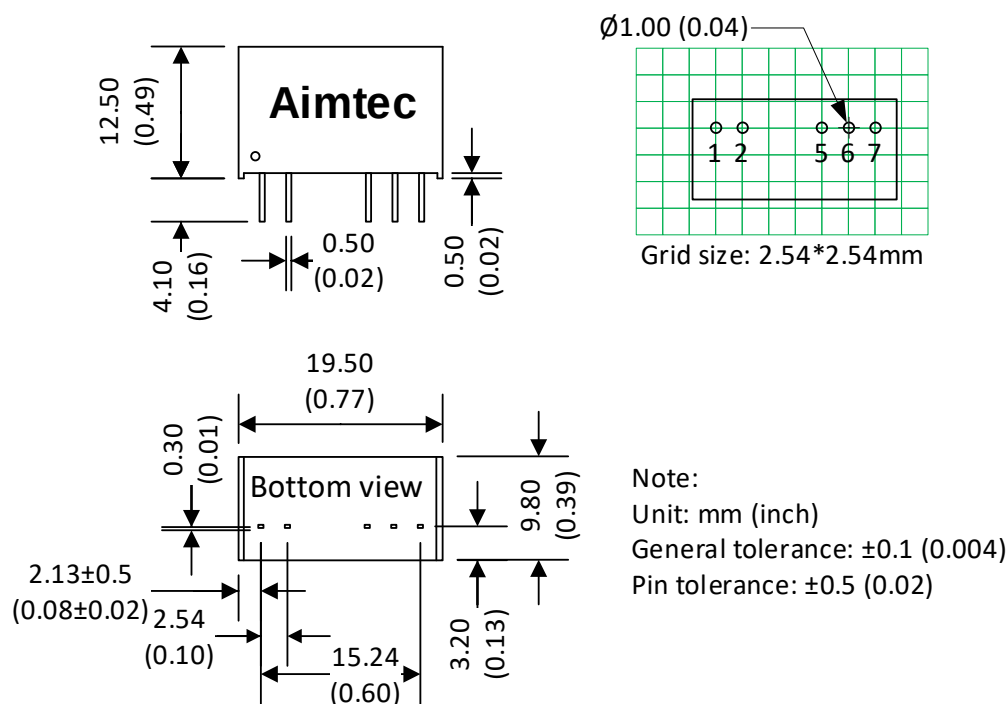

Pin	Pin Out Specifications
1	+V Input
2	-V Input
5	-V Output
6	Common
7	+V Output

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.