



3-Pin Microcontroller Power Supply Supervisor

General Description

The ASM809/ASM8091/ASM810 are cost effective 3.0V, 3.3V and 5.0V power supply supervisor circuits optimized for low-power microprocessor (μ P), microcontroller (μ C) and digital systems. They provide a reset output during power-up, power-down and brown-out conditions. They provide excellent reliability by eliminating external components and adjustments. The ASM809/ASM8091/ASM810 are improved drop-in replacements for the Maxim MAX809/810 and feature 60% lower supply current.

A reset signal is issued if the power supply voltage drops below a preset reset threshold and is asserted for at least 140mS after the supply has risen above the reset threshold. The ASM809/ASM8091 has an active-low $\overline{\text{RESET}}$ output that is guaranteed to be in the correct logic state for V_{CC} down to 1.1V. The ASM810 has an active-high RESET output. The reset comparator is designed to ignore fast transients on V_{CC} .

Low supply current makes the ASM809/ASM8091/ASM810 ideal for use in portable and battery operated equipment. The ASM809/ASM8091/ASM810 are available in a compact, industry standard 3&5-pin SOT-23 Packages.

Applications

- Embedded controllers
- Portable/Battery operated systems
- Intelligent instruments
- Wireless communication systems
- PDAs and handheld equipments
- Computers


Six voltage thresholds are available to support 3V to 5V systems:

RESET THRESHOLD	
Suffix	Voltage (V)
L	4.63
M	4.38
J	4.00
T	3.08
S	2.93
R	2.63

Features:


- Monitor 5V, 3.3V and 3V supplies
- 140mS minimum reset pulse width
- Active-low reset valid with 1.1V supply (ASM809/ASM8091)
- Small 3&5-pin SOT-23 Packages
- No external components
- Specified over full temperature range - -40°C to 105°C

Typical Operating Circuit

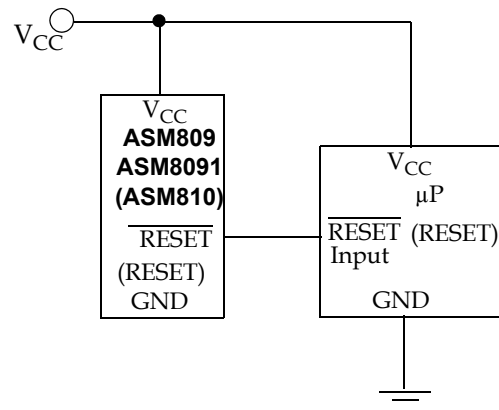



Pin Diagram

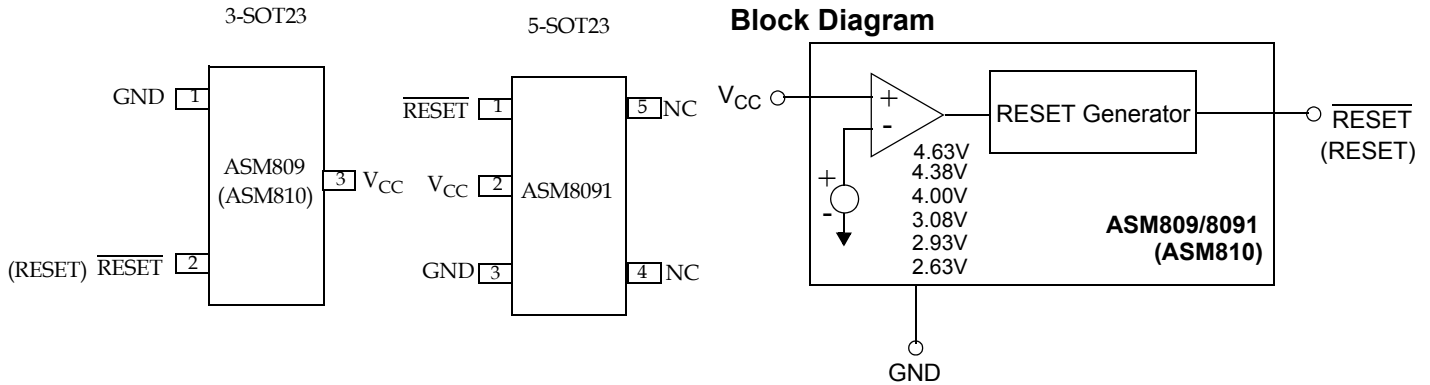

Pin Description

Pin #			Pin Name	Function
ASM8091 5-SOT 23	ASM809 3-SOT 23	ASM810		
3	1	-	GND	Ground.
1	2	-	$\overline{\text{RESET}}$	$\overline{\text{RESET}}$ is asserted LOW if V_{CC} falls below V_{TH} and remains LOW for at least 140mS (T_{RST}) after V_{CC} exceeds the threshold.
-	-	2	RESET	RESET is asserted HIGH if V_{CC} falls below V_{TH} and remains HIGH for at least 140mS (T_{RST}) after V_{CC} exceeds the threshold.
2	3	-	V_{CC}	Power supply input voltage (3.0V, 3.3V, 5.0V).

Detailed Description

A proper reset input enables a microprocessor / microcontroller to start in a known state. ASM809/ASM8091/ASM810 assert reset to prevent code execution errors during power-up, power-down and brown-out conditions.

Reset Timing

The reset signal is asserted LOW for the ASM809,ASM8091 and HIGH for the ASM810 when the V_{CC} supply voltage falls below the threshold trip voltage and remains asserted for 140mS minimum after the V_{CC} has risen above the threshold.

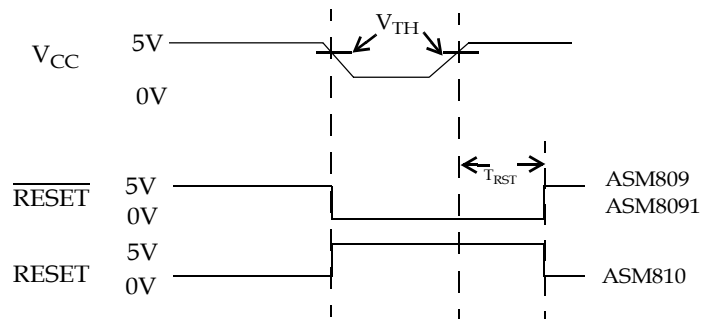


Figure 1: Reset Timing Diagram



Application Information

Negative V_{CC} Transients

The ASM809/ASM8091/ASM810 protect μ S from brownouts and low V_{CC} . Short duration transients of 100mV amplitude and 60 μ s or less duration typically do not cause a false RESET.

Valid Reset with V_{CC} under 1.1V

When V_{CC} is under 1.1V, to ensure logic inputs connected to the ASM809,ASM8091 $\overline{\text{RESET}}$ pin are in a known state, a 100k Ω pull-down resistor is needed at $\overline{\text{RESET}}$. The value of the resistor is not critical. A 100k Ω pull-up resistor to V_{CC} at RESET is needed with the ASM810.

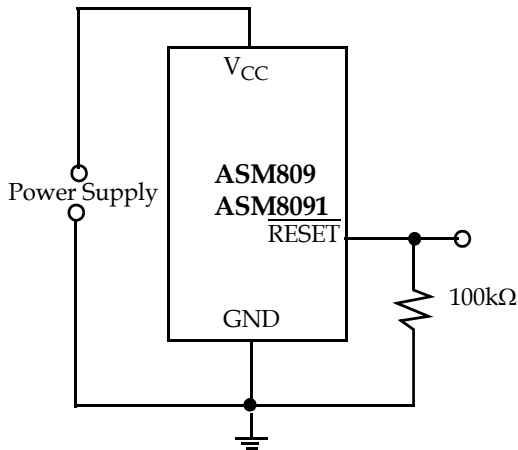


Figure 2: $\overline{\text{RESET}}$ valid with V_{CC} under 1.1V

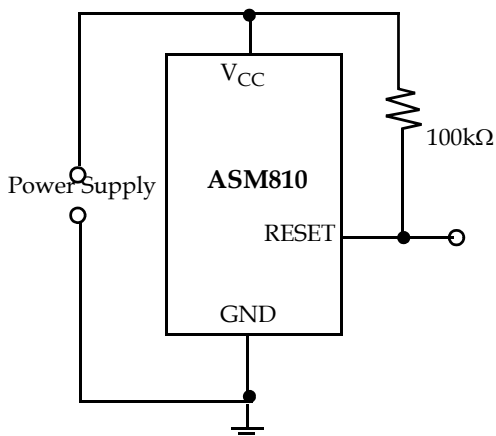


Figure 3: RESET valid with V_{CC} under 1.1V

Bidirectional Reset Pin Interfacing

The ASM809/ASM8091/ASM810 can interface with μ P / μ C bi-directional reset pins by connecting a 4.7k Ω resistor in series with the ASM809/ASM8091/ASM810 reset output and the μ P/ μ C bi-directional reset pin.

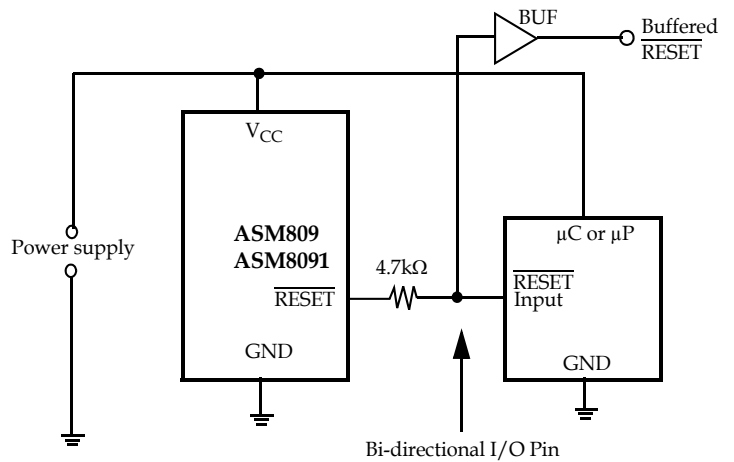


Figure 4: Bidirectional Reset Pin Interfacing



Absolute Maximum Ratings Table 1:

Parameter	Min	Max	Units
Pin Terminal Voltage With Respect To Ground			
V_{CC}	-0.3	6.0	V
RESET, $\overline{\text{RESET}}$	-0.3	$V_{CC} + 0.3$	V
Input current at V_{CC}		20	mA
Output current: RESET, $\overline{\text{RESET}}$		20	mA
Rate of Rise at V_{CC}		100	V/ μ s
ESD rating			
	HBM	2	KV
	MM	200	V
Note: These are stress ratings only and the functional operation is not implied. Exposure to absolute maximum ratings for prolonged time periods may affect device reliability.			

Absolute Maximum Ratings Table 2:

Parameter	Min	Max	Units
Power Dissipation ($T_A = 70^\circ\text{C}$)		320	mW
Operating temperature range	-40	105	$^\circ\text{C}$
Storage temperature range	-65	160	$^\circ\text{C}$
Lead temperature (Soldering, 10 sec)		300	$^\circ\text{C}$
Note: These are stress ratings only and the functional operation is not implied. Exposure to absolute maximum ratings for prolonged time periods may affect device reliability.			



Electrical Characteristics:

Unless otherwise noted, V_{CC} is over the full voltage range, $T_A = -40^{\circ}\text{C}$ to 105°C .

Typical values at $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{V}$ for L/M/J devices, $V_{CC} = 3.3\text{V}$ for T/S devices and $V_{CC} = 3\text{V}$ for R devices.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
V_{CC}	Input Voltage Range	$T_A = 0^{\circ}\text{C}$ to 70°C		1.1		5.5	V
		$T_A = -40^{\circ}\text{C}$ to 105°C		1.2		5.5	V
I_{CC}	Supply Current	$T_A = -40^{\circ}\text{C}$ to 85°C	$V_{CC} < 5.5\text{V}$		9	15	μA
		$T_A = -40^{\circ}\text{C}$ to 85°C	$V_{CC} < 3.6\text{V}$		6.0	10	
		$T_A = 85^{\circ}\text{C}$ to 105°C	$V_{CC} < 5.5\text{V}$			25	
		$T_A = 85^{\circ}\text{C}$ to 105°C	$V_{CC} < 3.6\text{V}$			20	
V_{TH}	Reset Threshold	L devices	$T_A = 25^{\circ}\text{C}$ $T_A = -40^{\circ}\text{C}$ to 85°C $T_A = 85^{\circ}\text{C}$ to 105°C	4.56 4.50 4.40	4.63	4.70 4.75 4.86	V
		M devices	$T_A = 25^{\circ}\text{C}$ $T_A = -40^{\circ}\text{C}$ to 85°C $T_A = 85^{\circ}\text{C}$ to 105°C	4.31 4.25 4.16	4.38	4.45 4.50 4.56	
		J devices	$T_A = 25^{\circ}\text{C}$ $T_A = -40^{\circ}\text{C}$ to 85°C $T_A = 85^{\circ}\text{C}$ to 105°C	3.93 3.89 3.80	4.00	4.06 4.10 4.20	
		T devices	$T_A = 25^{\circ}\text{C}$ $T_A = -40^{\circ}\text{C}$ to 85°C $T_A = 85^{\circ}\text{C}$ to 105°C	3.04 3.00 2.92	3.08	3.11 3.15 3.23	
		S devices	$T_A = 25^{\circ}\text{C}$ $T_A = -40^{\circ}\text{C}$ to 85°C $T_A = 85^{\circ}\text{C}$ to 105°C	2.89 2.85 2.78	2.93	2.96 3.00 3.08	
		R devices	$T_A = 25^{\circ}\text{C}$ $T_A = -40^{\circ}\text{C}$ to 85°C $T_A = 85^{\circ}\text{C}$ to 105°C	2.59 2.55 2.50	2.63	2.66 2.70 2.76	
	Reset Threshold Temp Coefficient				30		ppm/ $^{\circ}\text{C}$
	V_{CC} to Reset Delay	$V_{CC} = V_{TH}$ to $V_{TH}-100\text{mV}$			20		μs

Notes:

1. Production testing done at $T_A = 25^{\circ}\text{C}$. Over-temperature specifications guaranteed by design only, using six sigma design limits.
2. $\overline{\text{RESET}}$ output is active LOW for the ASM809/ASM8091 and RESET output is active HIGH for the ASM810.



Symbol	Parameter	Conditions	Min	Typ	Max	Unit
T_{RST}	Reset Active Timeout Period	$T_A = -40^{\circ}\text{C}$ to 85°C	140	240	560	ms
		$T_A = 85^{\circ}\text{C}$ to 105°C	100		840	
V_{OL}	Low $\overline{\text{RESET}}$ Output Voltage ASM809/ ASM8091	$V_{CC} = V_{TH \text{ min.}}$, $I_{SINK} = 1.2\text{mA}$, ASM809R/S/T and ASM8091S			0.3	V
		$V_{CC} = V_{TH \text{ min.}}$, $I_{SINK} = 3.2\text{mA}$, ASM809L/M/J			0.4	
		$V_{CC} > 1.1\text{V}$, $I_{SINK} = 50\mu\text{A}$			0.3	
V_{OH}	High $\overline{\text{RESET}}$ Output Voltage ASM809/ ASM8091	$V_{CC} > V_{TH \text{ max.}}$, $I_{SOURCE} = 500\mu\text{A}$, ASM809R/S/T and ASM8091S	$0.8V_{CC}$			V
		$V_{CC} > V_{TH \text{ max.}}$, $I_{SOURCE} = 800\mu\text{A}$, ASM809L/M/J	$V_{CC} - 1.5$			
V_{OL}	Low RESET Output Voltage ASM810	$V_{CC} = V_{TH \text{ max.}}$, $I_{SINK} = 1.2\text{mA}$, ASM810R/S/T			0.3	V
		$V_{CC} = V_{TH \text{ max.}}$, $I_{SINK} = 3.2\text{mA}$, ASM810L/M/J			0.4	V
V_{OH}	High RESET Output Voltage ASM810	$1.8\text{V} < V_{CC} < V_{TH \text{ min.}}$, $I_{SOURCE} = 150\mu\text{A}$	$0.8V_{CC}$			V

Notes:


1. Production testing done at $T_A = 25^{\circ}\text{C}$. Over-temperature specifications guaranteed by design only, using six sigma design limits.
2. $\overline{\text{RESET}}$ output is active LOW for the ASM809/ASM8091 and RESET output is active HIGH for the ASM810.




Typical Operating Characteristics

Unless otherwise noted, V_{CC} is over the full voltage range, $T_A = -40^{\circ}\text{C}$ to 105°C . Typical values at $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{V}$ for L/M/J devices, $V_{CC} = 3.3\text{V}$ for T/S devices and $V_{CC} = 3\text{V}$ for R devices.


Supply Current Vs. Temperature

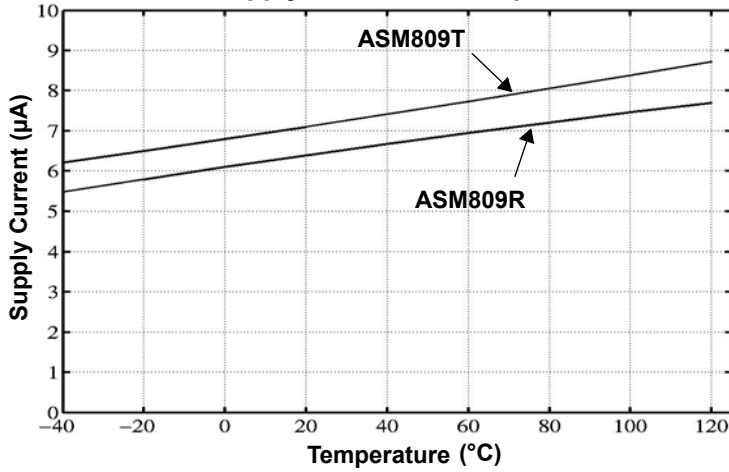

Normalized Reset Threshold Vs. Temperature

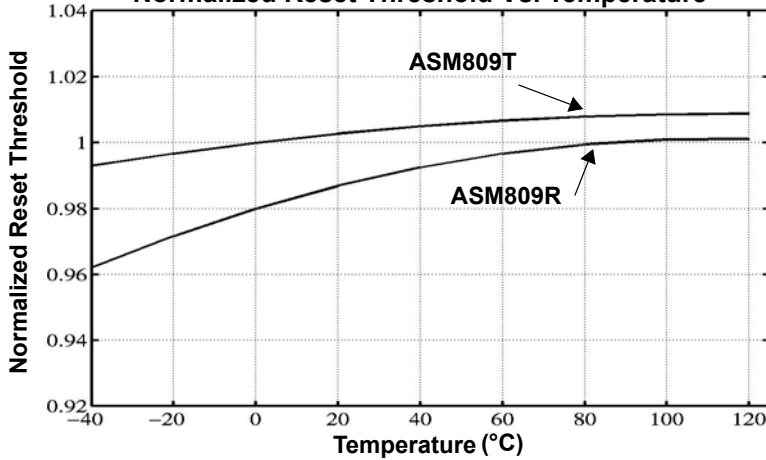

Power-up Reset Timeout Period Vs. Temperature

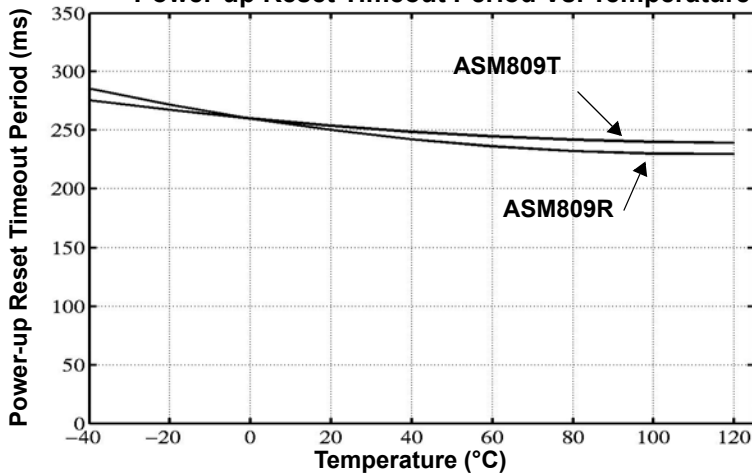




rev 1.8

Package Dimensions

Plastic SOT-23 (3-Pin)


	Inches		Millimeters	
	Min	Max	Min	Max
Plastic SOT-23 (3-Pin)				
A	0.030	0.046	0.75	1.17
A1	0.002	0.006	0.05	0.15
B	0.012	0.020	0.30	0.50
C	0.003	0.008	0.08	0.20
D	0.110	0.120	2.80	3.04
E	0.047	0.055	1.20	1.40
e	0.037 BSC		0.95 BSC	
e1	0.075 BSC		1.9 BSC	
H	0.083	0.104	2.10	2.64
L	0.016	0.024	0.40	0.60
a	0°	8°	0°	8°
S	NA		NA	

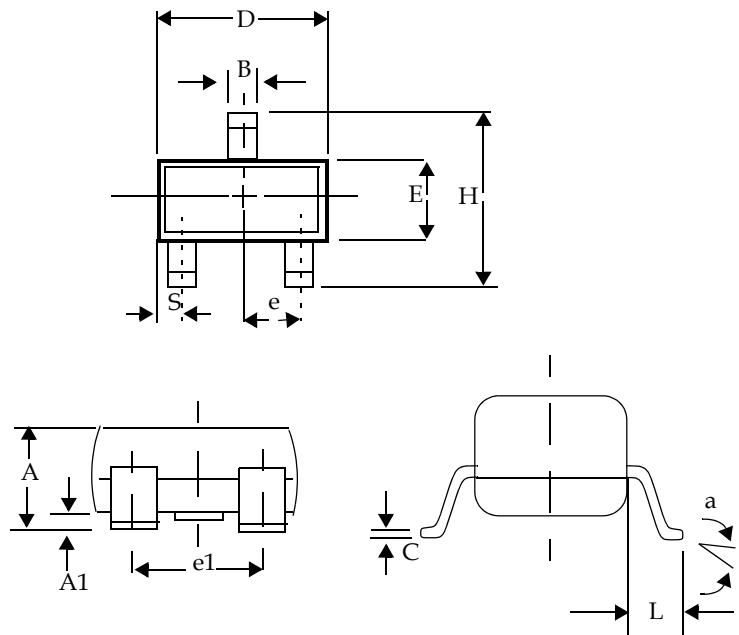



rev 1.8

5L SOT- 23 Package

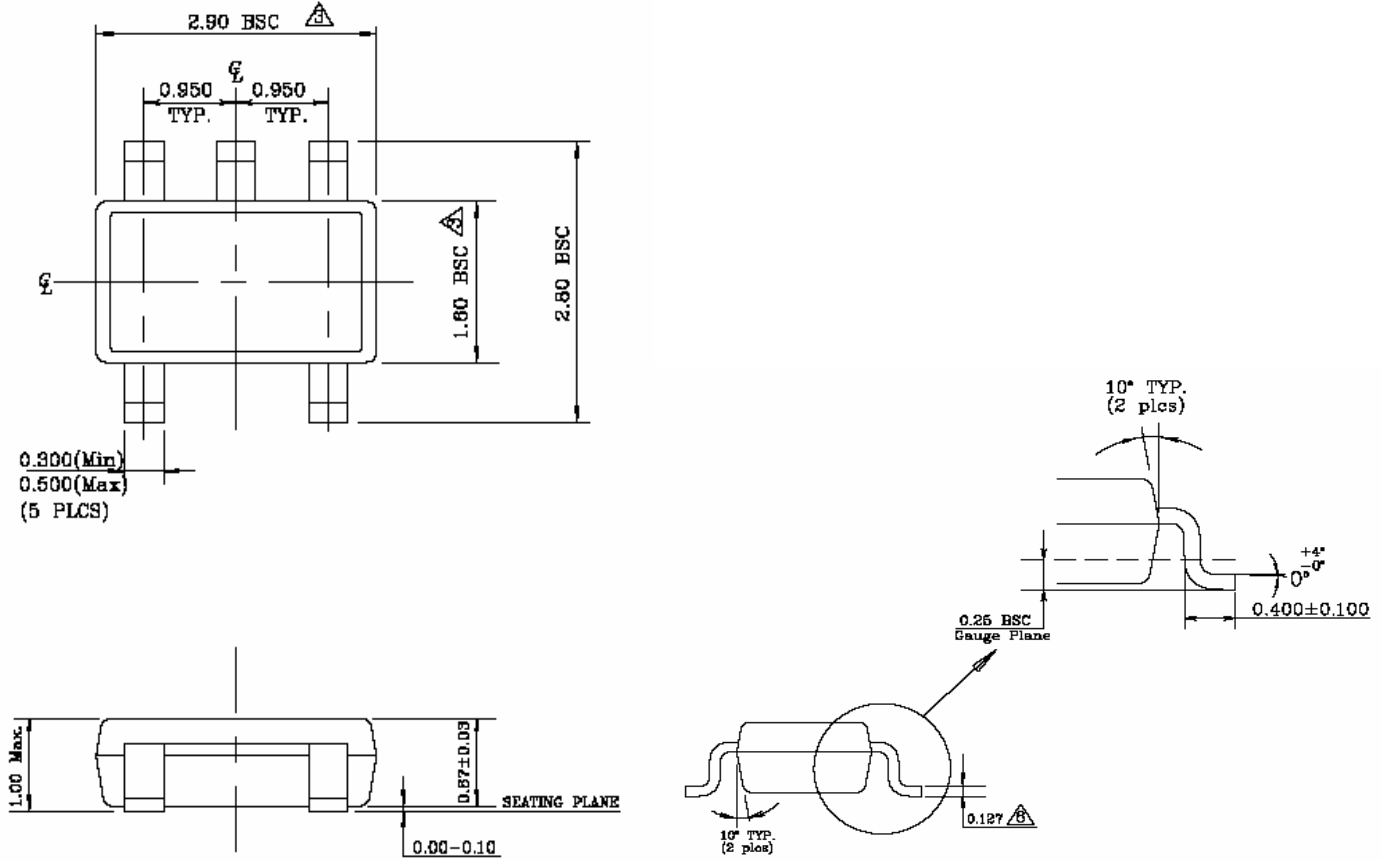

NOTE:

1. DIMENSIONS ARE IN MM.
2. DRAWING NOT TO SCALE.
3. DIMENSIONS ARE INCLUSIVE OF PLATING.
4. DIMENSIONS ARE EXCLUSIVE OF MOLD FLASH AND METAL BURR.
5. MOLD FLASH SHALL NOT EXCEED 0.254MM.
6. JEDEC PACKAGE REFERENCE IS MO-193.



Ordering Information:

Part Number	Reset Threshold (V)	Temperature Range	Pin-Package	Package Marking (LL Lot Code)
ASM809 ACTIVE LOW RESET, TIN-LEAD PLATED DEVICES				
ASM809LEUR	4.63	-40°C to +105°C	3-SOT23	SALL
ASM809MEUR	4.38	-40°C to +105°C	3-SOT23	SBLL
ASM809JEUR	4.00	-40°C to +105°C	3-SOT23	SCLL
ASM809TEUR	3.08	-40°C to +105°C	3-SOT23	SDLL
ASM809SEUR	2.93	-40°C to +105°C	3-SOT23	SELL
ASM809REUR	2.63	-40°C to +105°C	3-SOT23	SFLL
ASM8091SEUK	2.93	-40°C to +105°C	5-SOT23	LO83
ASM809 ACTIVE LOW RESET, LEAD FREE DEVICES				
ASM809LEURF	4.63	-40°C to +105°C	3-SOT23	NALL
ASM809MEURF	4.38	-40°C to +105°C	3-SOT23	NBLL
ASM809JEURF	4.00	-40°C to +105°C	3-SOT23	NCLL
ASM809TEURF	3.08	-40°C to +105°C	3-SOT23	NDLL
ASM809SEURF	2.93	-40°C to +105°C	3-SOT23	NELL
ASM809REURF	2.63	-40°C to +105°C	3-SOT23	NFLL
ASM8091SEUKF	2.93	-40°C to +105°C	5-SOT23	LO83
ASM810 ACTIVE HIGH RESET, TIN-LEAD PLATED DEVICES				
ASM810LEUR	4.63	-40°C to +105°C	3-SOT23	SGLL
ASM810MEUR	4.38	-40°C to +105°C	3-SOT23	SHLL
ASM810JEUR	4.00	-40°C to +105°C	3-SOT23	SILL
ASM810TEUR	3.08	-40°C to +105°C	3-SOT23	SJLL
ASM810SEUR	2.93	-40°C to +105°C	3-SOT23	SKLL
ASM810REUR	2.63	-40°C to +105°C	3-SOT23	SLLL
ASM810 ACTIVE HIGH RESET, LEAD FREE DEVICES				
ASM810LEURF	4.63	-40°C to +105°C	3-SOT23	NGLL
ASM810MEURF	4.38	-40°C to +105°C	3-SOT23	NHLL
ASM810JEURF	4.00	-40°C to +105°C	3-SOT23	NILL
ASM810TEURF	3.08	-40°C to +105°C	3-SOT23	NJLL
ASM810SEURF	2.93	-40°C to +105°C	3-SOT23	NKLL
ASM810REURF	2.63	-40°C to +105°C	3-SOT23	NLLL

Notes:

- For parts to be packed in Tape and Reel, add "-T" at the end of the part number.
- Alliance Semiconductor's lead free parts are RoHS compliant. All parts are Lead Free by default. Contact factory for Non Lead Free devices

July 2005



ASM809,ASM8091,ASM810

rev 1.8

Related Products:

	ASM809	ASM810	ASM811	ASM812	ASM8091
Max Supply Current	15 μ A	15 μ A	15 μ A	15 μ A	15 μ A
Package Pins	3	3	4	4	5
Manual RESET input			■	■	
Package Type	SOT-23	SOT-23	SOT-143	SOT-143	SOT-23
Active-HIGH RESET Output		■		■	
Active-LOW $\overline{\text{RESET}}$ Output	■		■		■

July 2005



ASM809,ASM8091,ASM810

rev 1.8



Alliance Semiconductor Corporation
2575 Augustine Drive,
Santa Clara, CA 95054
Tel: 408 - 855 - 4900
Fax: 408 - 855 - 4999
www.alsc.com

Copyright © Alliance Semiconductor
All Rights Reserved
Part Number:
ASM809,ASM8091,ASM810
Document Version: V.1.8

© Copyright 2003 Alliance Semiconductor Corporation. All rights reserved. Our three-point logo, our name and Intelliwatt are trademarks or registered trademarks of Alliance. All other brand and product names may be the trademarks of their respective companies. Alliance reserves the right to make changes to this document and its products at any time without notice. Alliance assumes no responsibility for any errors that may appear in this document. The data contained herein represents Alliance's best data and/or estimates at the time of issuance. Alliance reserves the right to change or correct this data at any time, without notice. If the product described herein is under development, significant changes to these specifications are possible. The information in this product data sheet is intended to be general descriptive information for potential customers and users, and is not intended to operate as, or provide, any guarantee or warranty to any user or customer. Alliance does not assume any responsibility or liability arising out of the application or use of any product described herein, and disclaims any express or implied warranties related to the sale and/or use of Alliance products including liability or warranties related to fitness for a particular purpose, merchantability, or infringement of any intellectual property rights, except as expressly agreed to in Alliance's Terms and Conditions of Sale (which are available from Alliance). All sales of Alliance products are made exclusively according to Alliance's Terms and Conditions of Sale. The purchase of products from Alliance does not convey a license under any patent rights, copyrights; mask works rights, trademarks, or any other intellectual property rights of Alliance or third parties. Alliance does not authorize its products for use as critical components in life-supporting systems where a malfunction or failure may reasonably be expected to result in significant injury to the user, and the inclusion of Alliance products in such life-supporting systems implies that the manufacturer assumes all risk of such use and agrees to indemnify Alliance against all claims arising from such use.