


5A 250V AC Qualified Primary Input Voltage Selection Type SDKP Series


Part number	SDKPA40300		
Type	Slide		
Circuit arrangement	DPDT		
Travel	6mm		
Operating force	10(+10, -5)N		
Mounting method	Self-tap (For M3)		
Terminal type	Right angle		
Turning stopper	Without		
Marking variety	Without marking		
C-UL-US	5A 250V AC		
SEMKO	5A 250V~		
Ratings satisfying local electrical appliance and material safety law	250V 5A ‡		
Operating temperature range	-10°C to +60°C		
Rating	5A 250V AC		
Electrical performance	Contact resistance	100mΩ max.	
	Insulation resistance	500MΩ min. 500V DC	
	Voltage proof	2,000V AC for 1 minute	
Mechanical performance	Terminal strength	10N for 1 minute	
	Actuator strength	Operating direction	50N

	Perpendicular direction	50N
Durability	Operating life	1,000 cycles Without load
Environmental performance	Cold	-20±2℃ for 96h
	Dry heat	85±2℃ for 96h
	Damp heat	40±2℃, 90 to 95%RH for 96h
Minimum order unit (pcs.)	Japan	100
	Export	1,000


Dimensions

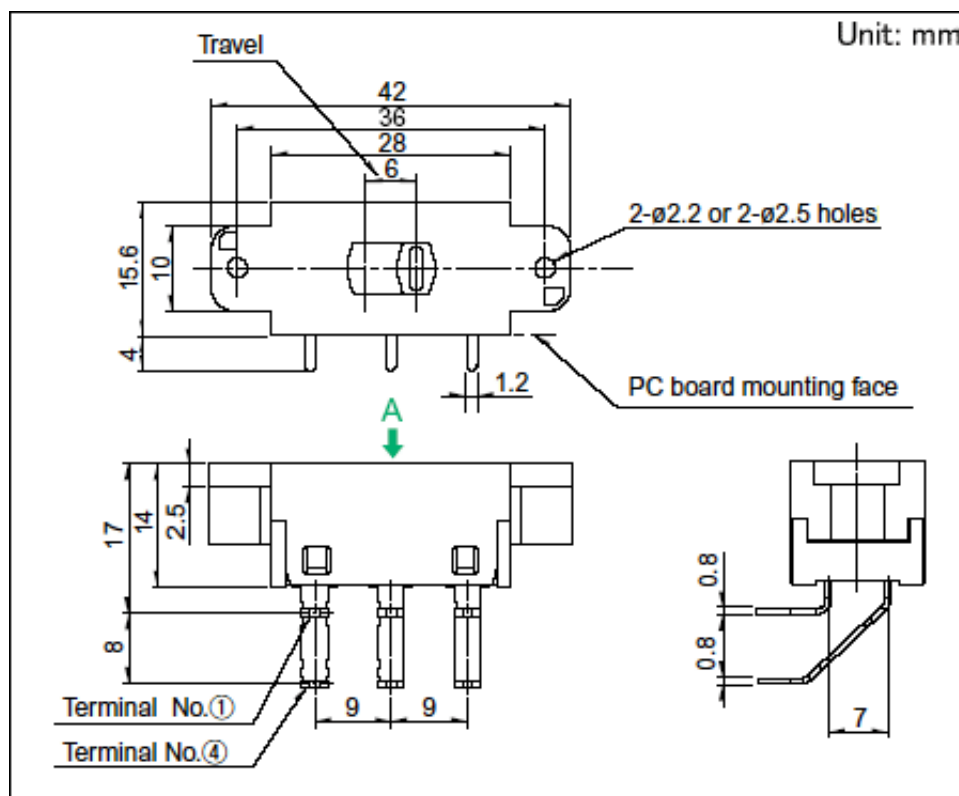

Mounting Hole Dimensions

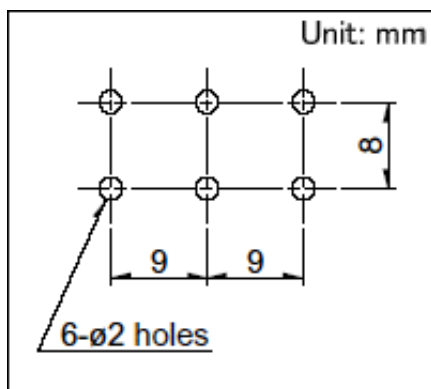

Circuit Diagram

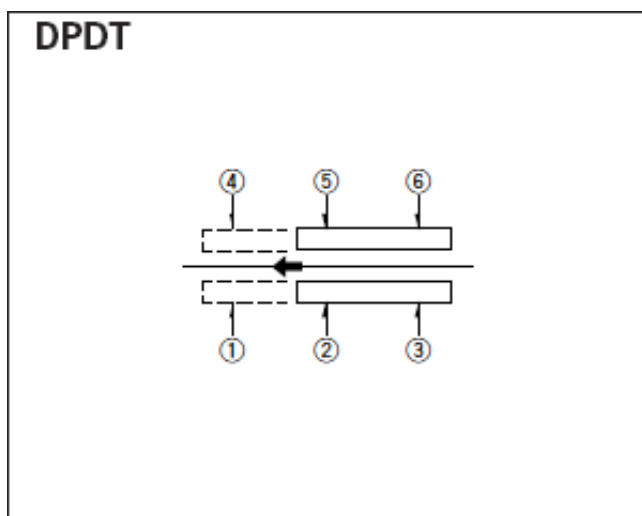

Viewed from direction A in the dimensions.

Packing Specifications

Bulk

Number of packages (pcs.)	1 case / Japan	100
	1 case / export packing	1,000
Export package measurements (mm)	555×381×267	

Soldering Conditions

Reference for Hand Soldering

Soldering temperature	350±10℃
Soldering time	3+1/0s

Notes are common to this series/models.

1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. Please place purchase orders per minimum order unit (integer).